
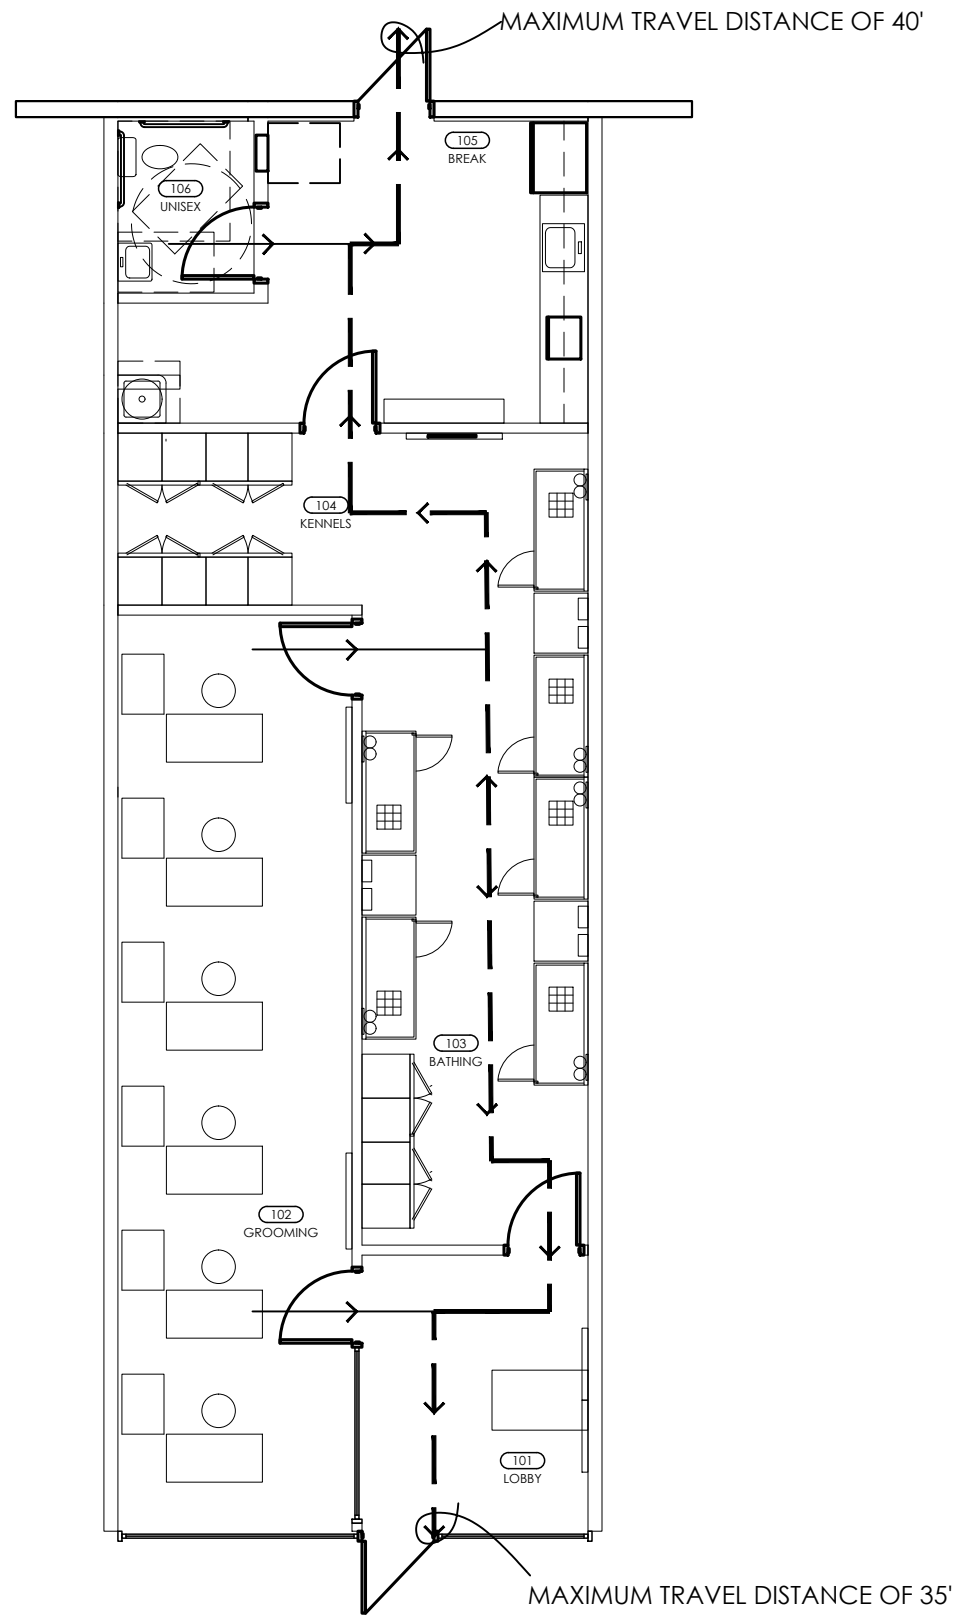


LOCATION MAP

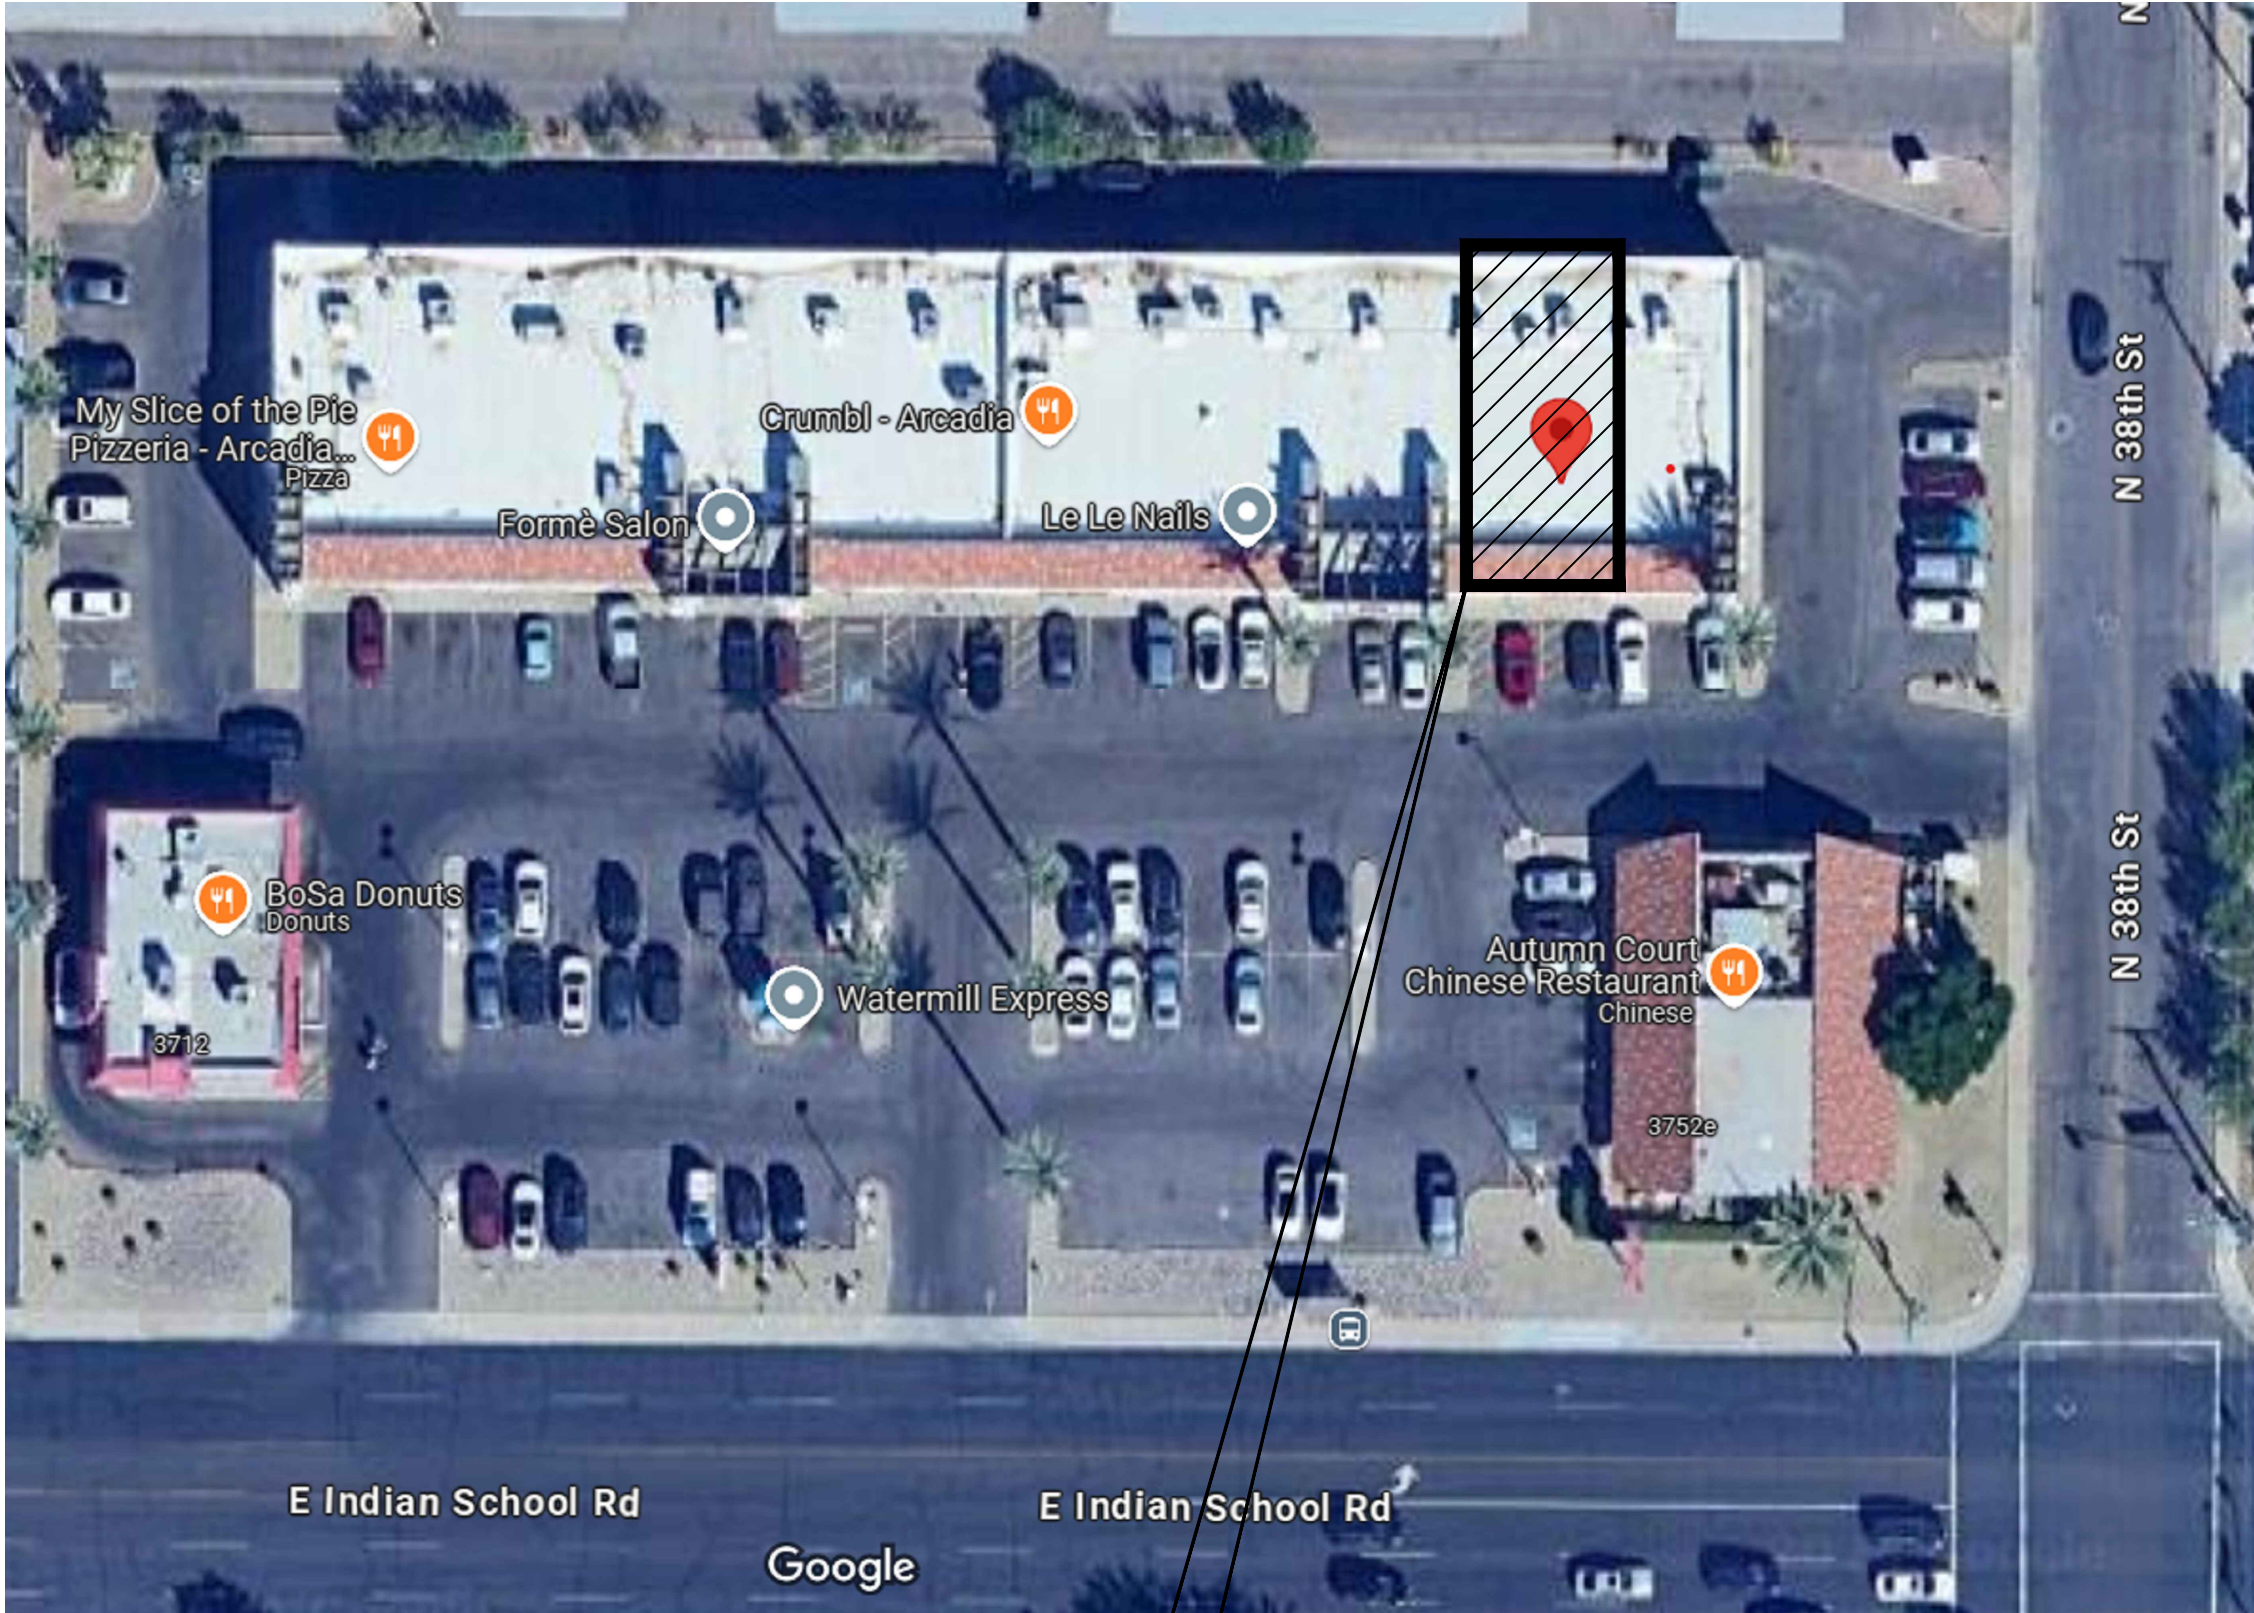

EGRESS PLAN NOTE: PER IBC TABLE 1006.2.1 THE MAXIMUM TRAVEL DISTANCE IS 100' - FOR FIRE SPRINKLERED BUILDINGS.

SPECIFICATIONS

THESE SPECIFICATIONS CONTAIN IMPORTANT INFORMATION RELATING TO BUILDING CODES, CITY ORDINANCES, MATERIALS, AND METHODS.

DIVISION 1 INSTRUCTIONS TO BIDDERS

- THESE DOCUMENTS ARE TO BE BID AS AN ENTIRE PACKAGE. NO CONSIDERATION WILL BE GIVEN TO THE CONTRACTOR/SUBCONTRACTORS FOR ITEMS OMITTED DUE TO BIDDING OF PARTIAL DOCUMENTS.
- VISIT THE SITE BEFORE SUBMITTING YOUR FINAL BID. NO CONSIDERATION WILL BE GIVEN TO THE CONTRACTOR/SUBCONTRACTORS FOR ITEMS OMITTED DUE TO LACK OF KNOWLEDGE OF EXISTING UNCONCEALED SITE CONDITIONS.
- DO NOT SCALE DRAWINGS. WRITTEN DIMENSIONS ALWAYS TAKE PRECEDENCE OVER THE SCALE OF A DRAWING.
- INCLUDE IN YOUR BID THE FOLLOWING ADDITIONAL ITEMS:
 - ITEMS TO BE REMOVED IN ORDER TO COMPLETE THE PROJECT. REFER TO DIVISION 2.
 - ITEMS TO BE RELOCATED IN ORDER TO COMPLETE THE PROJECT. REFER TO OTHER DIVISIONS WITHIN THESE SPECIFICATIONS.
- IF YOU SHOULD FIND APPARENT CONFLICTS IN, OR OMISSIONS FROM THESE DOCUMENTS OR BE IN DOUBT AS TO THEIR MEANING, CONTACT CITY SPACES IN WRITING PRIOR TO SUBMITTING A FINAL BID.
- THE CONTRACTOR SHALL GIVE CITY SPACES 48 HOURS TO RESEARCH AND REPLY TO ALL QUESTIONS. ONLY WRITTEN RESPONSES FROM CITY SPACES SHALL BE CONSIDERED VALID CHANGES TO THE SCOPE OF WORK.

CONTRACTOR'S RESPONSIBILITIES
1. THE CONTRACTOR SHALL FILE FOR ALL REQUIRED INSPECTIONS WITH ALL APPLICABLE AGENCIES.

OWNER'S OBLIGATIONS
1. THE OWNER WILL PAY FOR ALL NORMALLY REQUIRED BUILDING PERMITS, IMPACT FEES, INSPECTION FEES ETC, AS NEEDED TO COMPLETE THE PROJECT.

2. THE OWNER WILL PAY FOR ALL CHANGES TO THE WORK RESULTING FROM CONDITIONS THAT COULD NOT HAVE BEEN KNOWN TO THE CONTRACTOR OR CITY SPACES BY VISUAL INSPECTION OF THE SITE.

3. THE OWNER WILL MAKE THE SITE ACCESSIBLE TO THE CONTRACTOR DURING THE PERIOD OF CONSTRUCTION, AND WILL NOT HOLD THE CONTRACTOR RESPONSIBLE FOR TIME DELAYS OR COST INCREASES CAUSED BY OWNER OR TENANT ACTIONS.

DIVISION 2 DEMOLITION

1. REMOVE ALL EXISTING FLOORING, WALLS, DOORS, CEILINGS, CASEWORK, ETC. AS REQUIRED TO ALLOW FOR ALL NEW WORK.

2. REMOVE OR RELOCATE ALL COMPONENTS OF THE MECHANICAL, PLUMBING, FIRE SPRINKLER AND ELECTRICAL SYSTEMS AS REQUIRED TO ALLOW FOR ALL NEW WORK. RELOCATION OF ITEMS TO REMAIN SHALL COMPLY WITH ALL CODES AND ORDINANCES.

3. WHERE DEMOLITION HAS OCCURRED, REPAIR OR REPLACE ANY REMAINING FLOORS, WALLS OR CEILINGS TO "LIKE NEW" CONDITION. MATCH ADJACENT NEW FINISHES.

DIVISION 17 ACCESSIBILITY REQUIREMENTS

- ALL WORK SHALL COMPLY WITH THE AMERICANS WITH DISABILITIES ACT ARCHITECTURAL GUIDELINES (ADAAG) AND ANSI STANDARDS A-117.1, LATEST EDITION.
- ALL THRESHOLDS SHALL BE A MAXIMUM 1/2" HEIGHT AND BEVELED.
- ALL DOOR HANDLES SHALL BE LEVER TYPE. CENTER OF LEVER TO BE INSTALLED 36" ABOVE FINISH FLOOR.
- LAVATORY FAUCETS SHALL BE LEVER TYPE.
- HOT WATER AND DRAINPIPPES UNDER LAVATORIES SHALL BE INSULATED.
- TOILET PAPER DISPENSER SHALL BE CONTINUOUS FLOW TYPE.
- FLUSH CONTROL VALVE AT WATER CLOSET SHALL BE ON THE WIDE SIDE OF THE CLOSET AND MOUNTED AT NO GREATER THAN 42" ABOVE THE FINISH FLOOR.

DEFERRED SUBMITTALS

- FIRE SPRINKLERS
- FIRE ALARM

HOW TO READ THESE PLANS

THESE PLANS ARE DRAWN USING A LEGEND FORMAT. THE LEGENDS ON EACH SHEET EXPLAIN THE MANY SYMBOLS USED THROUGHOUT THE PLANS.

A SYMBOL SHOWN IN A LEGEND DOES NOT NECESSARILY MEAN THAT THE ITEM OCCURS WITHIN THE SCOPE OF THIS PROJECT. REVIEW THE PLANS AND SPECIFICATIONS CAREFULLY TO DETERMINE THE COMPLETE SCOPE OF WORK.

ABOUT THIS PROJECT

THIS PROJECT IS A MINOR TENANT IMPROVEMENT - CONVERTING AN EXISTING SPACE INTO A DOG GROOMING SALON. REMODEL INCLUDES LOBBY, BREAK ROOM, KENNELS, BATHING/PREF ROOM, GROOMING ROOM.

THIS IS NOT AN AMBULATORY CARE FACILITY. THE STORE WILL BE OPEN DURING NORMAL BUSINESS HOURS.

PROJECT SCOPE OF WORK

THIS PROJECT IS A TENANT IMPROVEMENT PROJECT OF AN EXISTING SHELL SPACE. PROPOSED WORK INCLUDES:

DEMOLITION: REMOVE INTERIOR NON-LOAD BEARING PARTITIONS, FLOORING, CEILING GRID, DUCT WORK, IMPROVEMENTS AS NECESSARY, SEE DIVISION 2 OF SPECIFICATIONS.

EXTERIOR: NONE REQUIRED, ALL EXTERIOR SIGNAGE UNDER SEPARATE PERMIT.

INTERIOR: NON-LOAD BEARING INTERIOR PARTITIONS
ROOM FINISHES TO INCLUDE PAINT, CARPET, CERAMIC TILE, AND ACOUSTICAL CEILING.

MECHANICAL: ROOF TOP UNITS EXIST.
DISTRIBUTION OF AIR INCLUDING DUCTWORK AND REGISTERS.

PLUMBING: RESTROOMS FIXTURES, MOP SINK.

ELECTRICAL: OUTLETS FOR GENERAL USE
LIGHT FIXTURES
ELECTRICAL PANELS

FIRE SPRINKLER: NOT INCLUDED UNDER THIS PERMIT. SEE GENERAL NOTES THIS SHEET.

FIRE ALARM: NOT INCLUDED UNDER THIS PERMIT. SEE GENERAL NOTES THIS SHEET.

(SEE PLANS FOR FULL DESCRIPTION OF WORK)

GENERAL NOTES

A. SITE IMPROVEMENTS, LANDSCAPING, PARKING, SHELL STRUCTURE, WATER AND SEWER MAIN LINES, AND ELECTRICAL DISTRIBUTION ARE EXISTING SYSTEMS AND ARE TO BE MODIFIED ONLY TO THE EXTENT SHOWN IN THESE DOCUMENTS.

B. ALL PRODUCTS LISTED BY ICC, UL OR EQUIVALENT NUMBERS SHALL BE INSTALLED PER THE REPORT AND MANUFACTURER'S WRITTEN INSTRUCTION. PRODUCT SUBSTITUTION FOR PRODUCTS LISTED SHALL ALSO HAVE AN APPROVED EVALUATION REPORT OR BE APPROVED AND LISTED BY OTHER NATIONALLY RECOGNIZED TESTING AGENCIES.

C. FIRE SPRINKLER APPROVALS ARE NOT INCLUDED UNDER THIS PERMIT. BEFORE COMMENCING ANY WORK ON THE SPRINKLER SYSTEM, PLANS MUST BE SUBMITTED TO AND APPROVED BY THE BUILDING DEPARTMENT. THE SYSTEM MUST BE INSPECTED AND APPROVED BY THE BUILDING DEPARTMENT PRIOR TO A CERTIFICATE OF OCCUPANCY.

D. FIRE ALARM APPROVALS ARE NOT INCLUDED UNDER THIS PERMIT. BEFORE COMMENCING ANY WORK ON THE SPRINKLER SYSTEM, PLANS MUST BE SUBMITTED TO AND APPROVED BY THE BUILDING DEPARTMENT. THE SYSTEM MUST BE INSPECTED AND APPROVED BY THE BUILDING DEPARTMENT PRIOR TO A CERTIFICATE OF OCCUPANCY.


E. ALL SIGNS REQUIRED SEPARATE PERMIT AND APPROVAL.

F. NO EXTERIOR VENDING OR DISPLAY SHALL BE ALLOWED.

G. ALL EXTERIOR MECHANICAL, UTILITY, AND COMMUNICATION EQUIPMENT SHALL BE SCREENED, TO THE HEIGHT OF THE TALLEST UNIT, BY A PARAPET OR SCREEN WALL THAT MATCHES THE ARCHITECTURAL COLOR AND ARCHITECTURAL FINISH OF THE BUILDING. GROUND-MOUNTED MECHANICAL, UTILITIES, AND COMMUNICATION EQUIPMENT SHALL BE SCREENED BY A SCREEN WALL THAT MATCHES THE ARCHITECTURAL COLOR AND ARCHITECTURAL FINISH OF THE BUILDING, WHICH IS A MINIMUM OF 1'-0" HIGHER THAN THE HIGHEST POINT OF THE TALLEST UNIT. (A DETAIL IS ALSO REQUIRED)

H. ALL EQUIPMENT, UTILITIES, OR OTHER APPURTENANCES ATTACHED TO THE BUILDING SHALL BE AN INTEGRAL PART OF THE BUILDING DESIGN IN TERM OF FORM, COLOR, AND TEXTURE.

VICINITY MAP

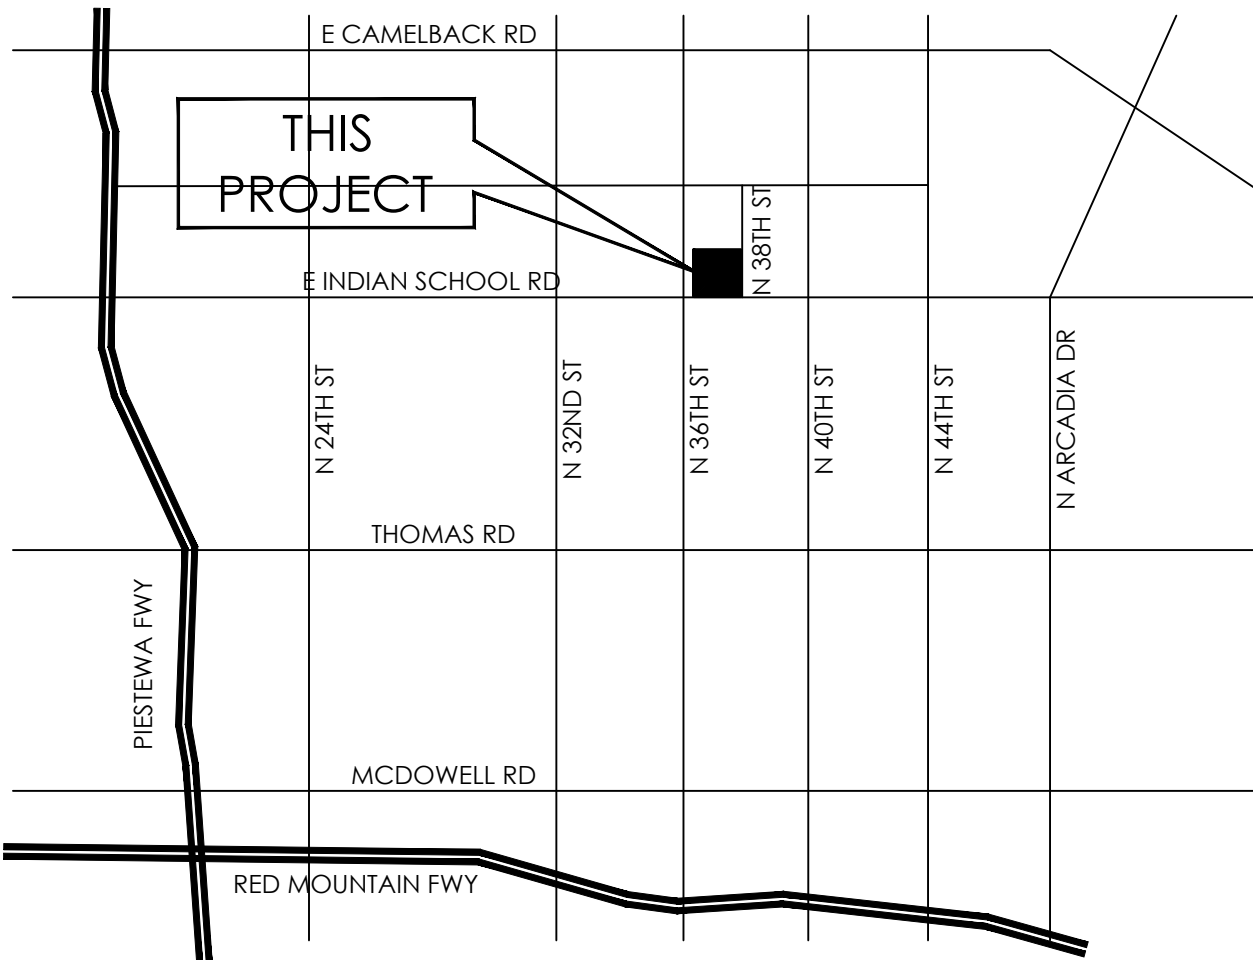

SHEET INDEX

- A-0 COVER SHEET
- A-1 DEMOLITION PLANS
- A-2 FLOOR PLAN
- A-2D FLOOR PLAN DIMENSIONS
- A-3 CEILING PLAN
- A-4 ROOM AND DOOR SCHEDULES
- D-1 DETAILS - ARCHITECTURAL
- D-2 DETAILS - MECHANICAL AND PLUMBING
- M-1 MECHANICAL PLAN / CALCS
- P-1 PLUMBING PLAN
- P-3 PLUMBING PLAN / ISOMETRIC
- E-1 POWER PLAN
- E-2 LIGHTING PLAN
- E-3 PANEL SCHEDULE / ONE LINE DIAGRAM

CONSTRUCTION CODES

CITY OF PHOENIX CONSTRUCTION CODES
THIS PROJECT SHALL ADHERE TO THE FOLLOWING CODES:

- 2018 INTERNATIONAL BUILDING CODE
- 2018 INTERNATIONAL EXISTING BUILDING CODE
- 2017 NATIONAL ELECTRIC CODE
- 2018 INTERNATIONAL MECHANICAL CODE
- 2018 INTERNATIONAL FIRE CODE W/ PROPOSED AMENDMENTS
- 2018 INTERNATIONAL ENERGY CONSERVATION CODE
- 2018 INTERNATIONAL FUEL GAS CODE
- 2018 INTERNATIONAL GREEN CONSTRUCTION CODE
- 2019 ADA STANDARDS FOR ACCESSIBLE DESIGN AND ICC A117.1-2009

PROJECT INFORMATION

ZONING: C-2
CONSTRUCTION TYPE: V-B
SUITE AREA: 1210 s.f.
OCCUPANCY TYPE: B
OCCUPANT LOAD:

OFFICE:	1210 / 150 =	8.06
TOTAL:		8.06 USE 8

EXITS REQUIRED: 1
EXITS PROVIDED: 1

PARKING CALCULATIONS


FOR THIS PROJECT:
PARKING REQUIRED:

OFFICE / RETAIL:	1210 / 300 =	4.03
TOTAL:		4.03 USE 4

PARKING PROVIDED: 67 EXISTING SPACES (INCLUDING 3 ACCESSIBLE SPACES)

STATUS OF DRAWINGS

THESE PLANS ARE ISSUED FOR BIDDING AND PERMITTING. FINAL PLANS FOR CONSTRUCTION WILL BE ISSUED AFTER APPROVAL BY ALL GOVERNING AGENCIES. AGENCY ITEMS AND ADDENDA ITEM, IF ANY, WILL BE ADDED TO FINAL PLANS AND WILL BE PROPERLY NOTED AS SUCH.

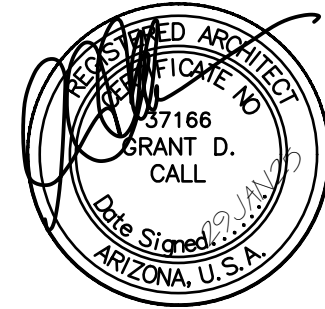

CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net
DRAFTER: GO, DJ, GD, JR

REVISIONS:

- 1
- 2
- 3
- 4
- 5


SPARKLE DOG
CARE

3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025
CS-1140

A-0

COVER SHEET

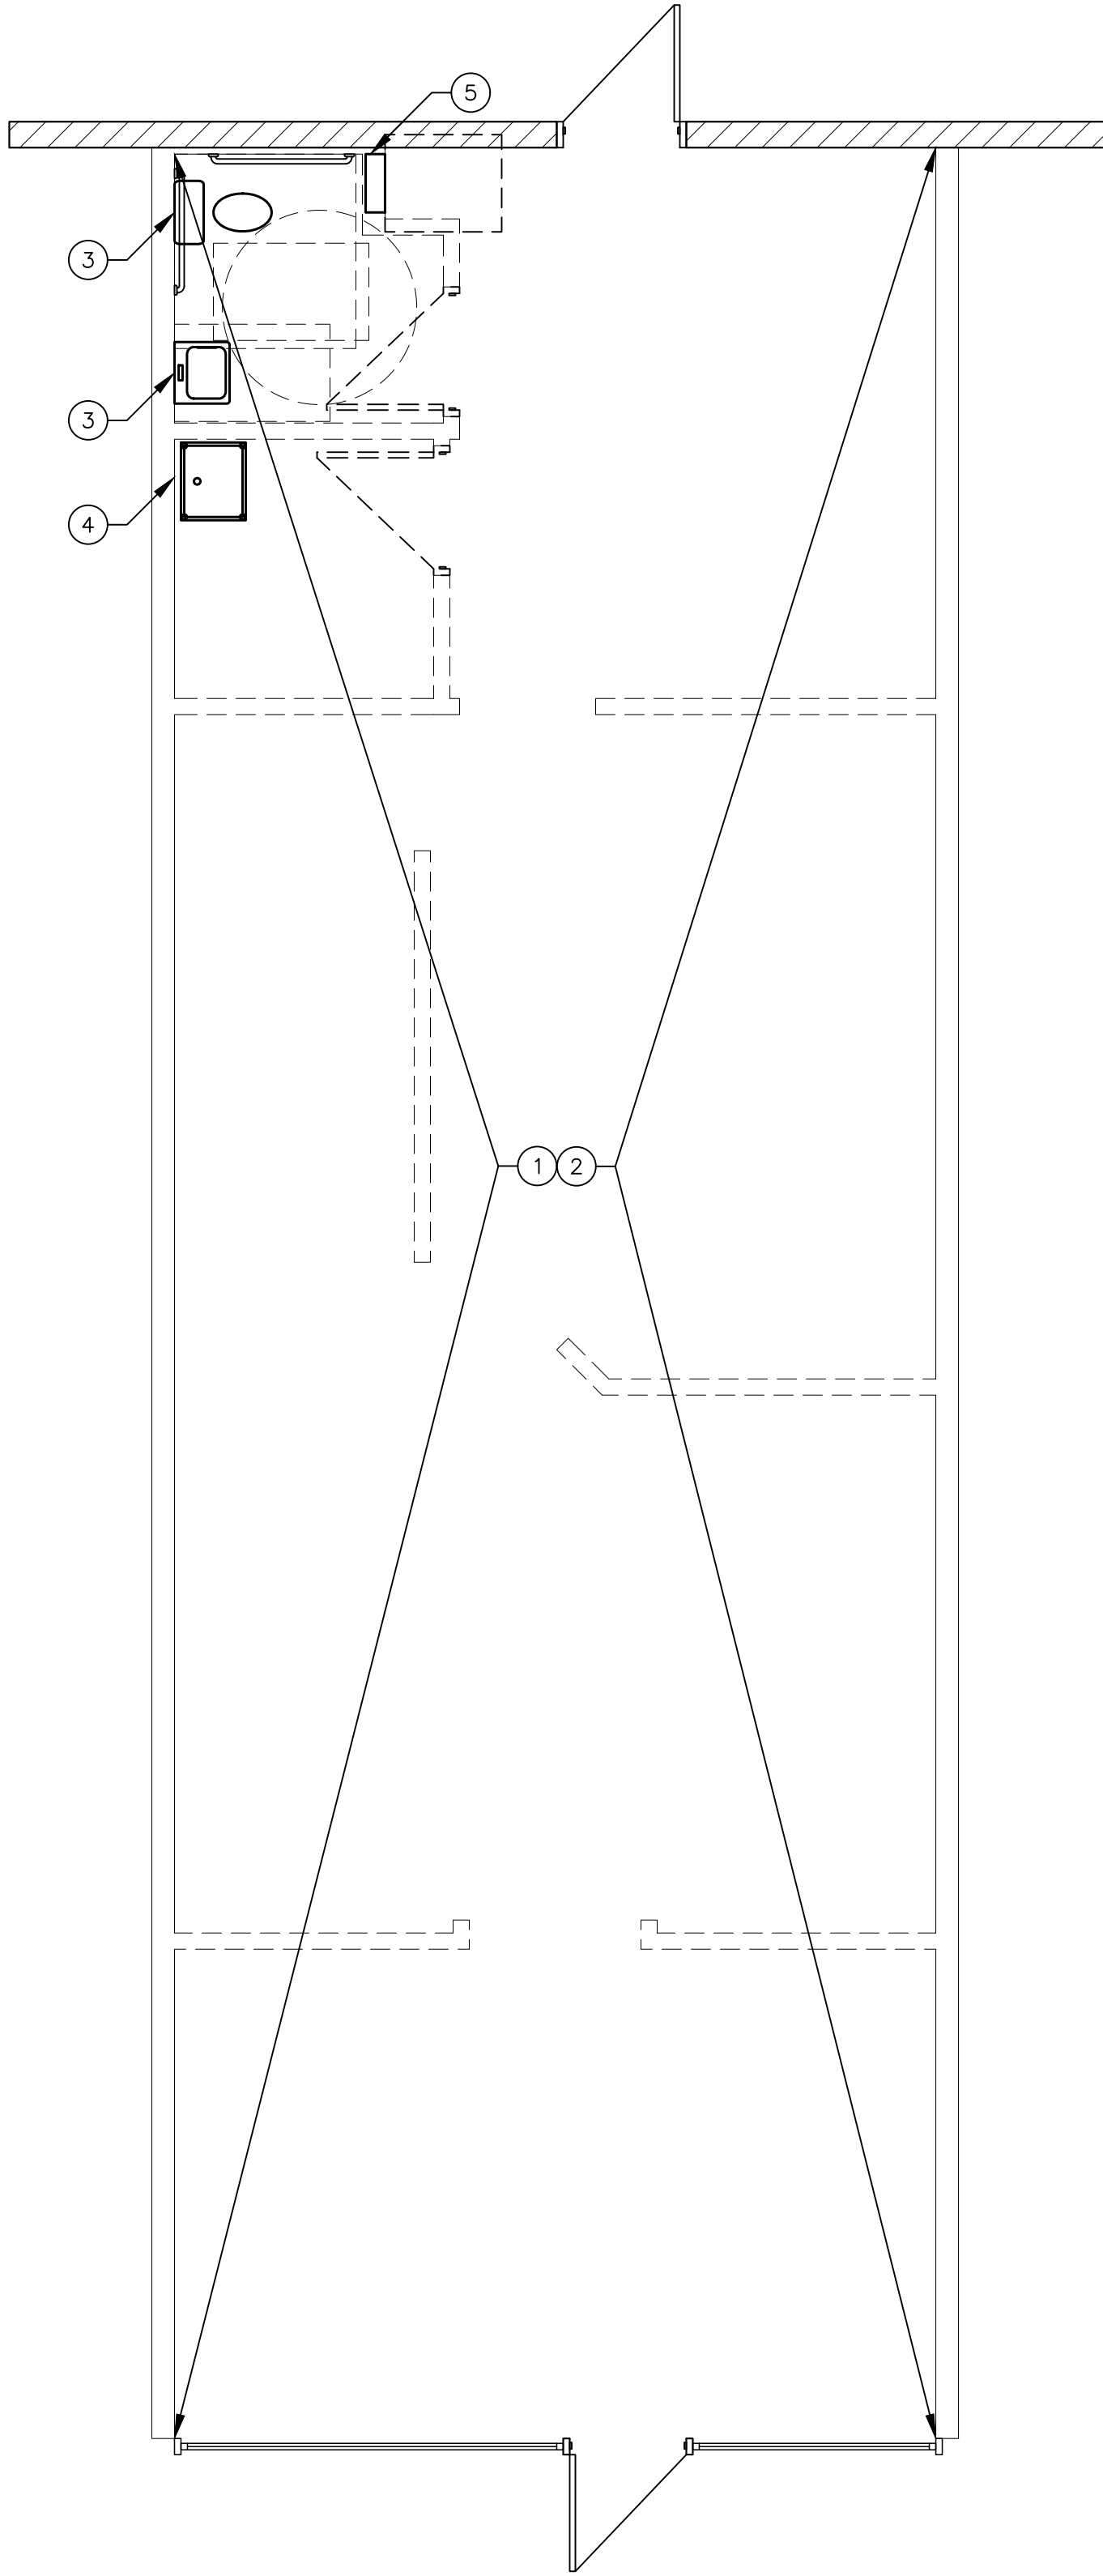

DEMOLITION PLAN KEYNOTES

1. REMOVE ALL FLOORING THROUGHOUT THE ENTIRE SUITE, INCLUDING ALL SHEET VINYL, VCT AND CARPET ALONG WITH THE ASSOCIATED CARPET AND RUBBER BASE.
2. REMOVE EXISTING CEILING GRID THIS SPACE. REMOVE ALL LIGHTS AND CEILING DIFFUSERS. PATCH AND REPAIR ALL WALLS AND CEILINGS AS REQUIRED - PAINT AS NEEDED. SEE CEILING PLAN FOR CEILING LAYOUT.
3. EXISTING PLUMBING FIXTURE TO REMAIN IN PLACE UNLESS NOTED OTHER WISE.
4. REMOVE EXISTING PLUMBING FIXTURE AT THIS LOCATION. CAP SEWER LINE BELOW SLAB AND WATER LINE ABOVE THE CEILING.
5. REMOVE EXISTING ELECTRICAL PANEL. REUSE FEEDERS FOR NEW PANEL LOCATION.

WALL LEGEND

- EXISTING WALL
- WALL TO BE REMOVED



DOOR LEGEND

SEE DETAIL A5, SHEET D-1 FOR REQUIRED DOOR CLEARANCES.

- EXISTING DOOR OR PAIR OF DOORS TO REMAIN.
- EXISTING DOOR OR PAIR OF DOORS TO BE REMOVED.

GENERAL NOTES

- A. FURNITURE PLACEMENT SHALL NOT RESTRICT ADA ACCESS REQUIRED.
- B. CONTRACTOR TO PROVIDE MIN. R-38 BATT INSULATION AT ENTIRE DECK SPACE IF NOT CURRENTLY INSTALLED.
- C. CONTRACTOR TO PROVIDE MIN. R-19 BATT INSULATION IN ALL FRAMED EXTERIOR WALLS IF NOT ALREADY PROVIDED.
- D. TENANT TO COORDINATE WITH LANDLORD FOR PROVIDING BLINDS FOR SUN CONTROL TO ALL WINDOWS TO EXTERIOR.
- E. ROOF PENETRATIONS AND ROOF WORK TO BE PERFORMED BY LANDLORD'S CONTRACTOR IF REQUIRED, VERIFY WITH LANDLORD.
- F. REMOVE ALL WIRING, CONDUIT AND SUPPORTS BACK TO THE PANEL FOR ALL CIRCUITS NOT REMAINING IN USE FOR THE FUTURE T.I., SEE ADDITIONAL T.I. DRAWINGS FOR MORE INFORMATION.

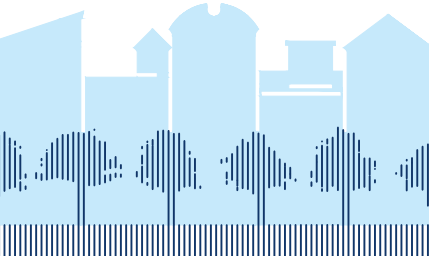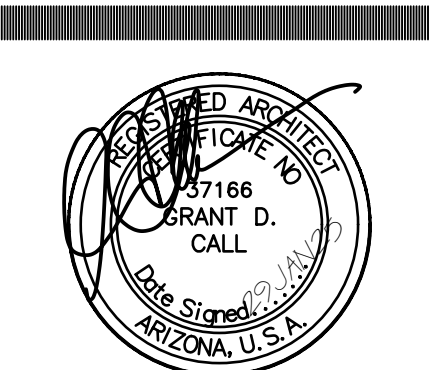

CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net
DRAFTER: GO, DJ, GD, JR

REVISIONS:

- 1

--
- 2

--
- 3

--
- 4

--
- 5

--

SPARKLE DOG
CARE


3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025

CS-1140

A-1

DEMOLITION
PLAN


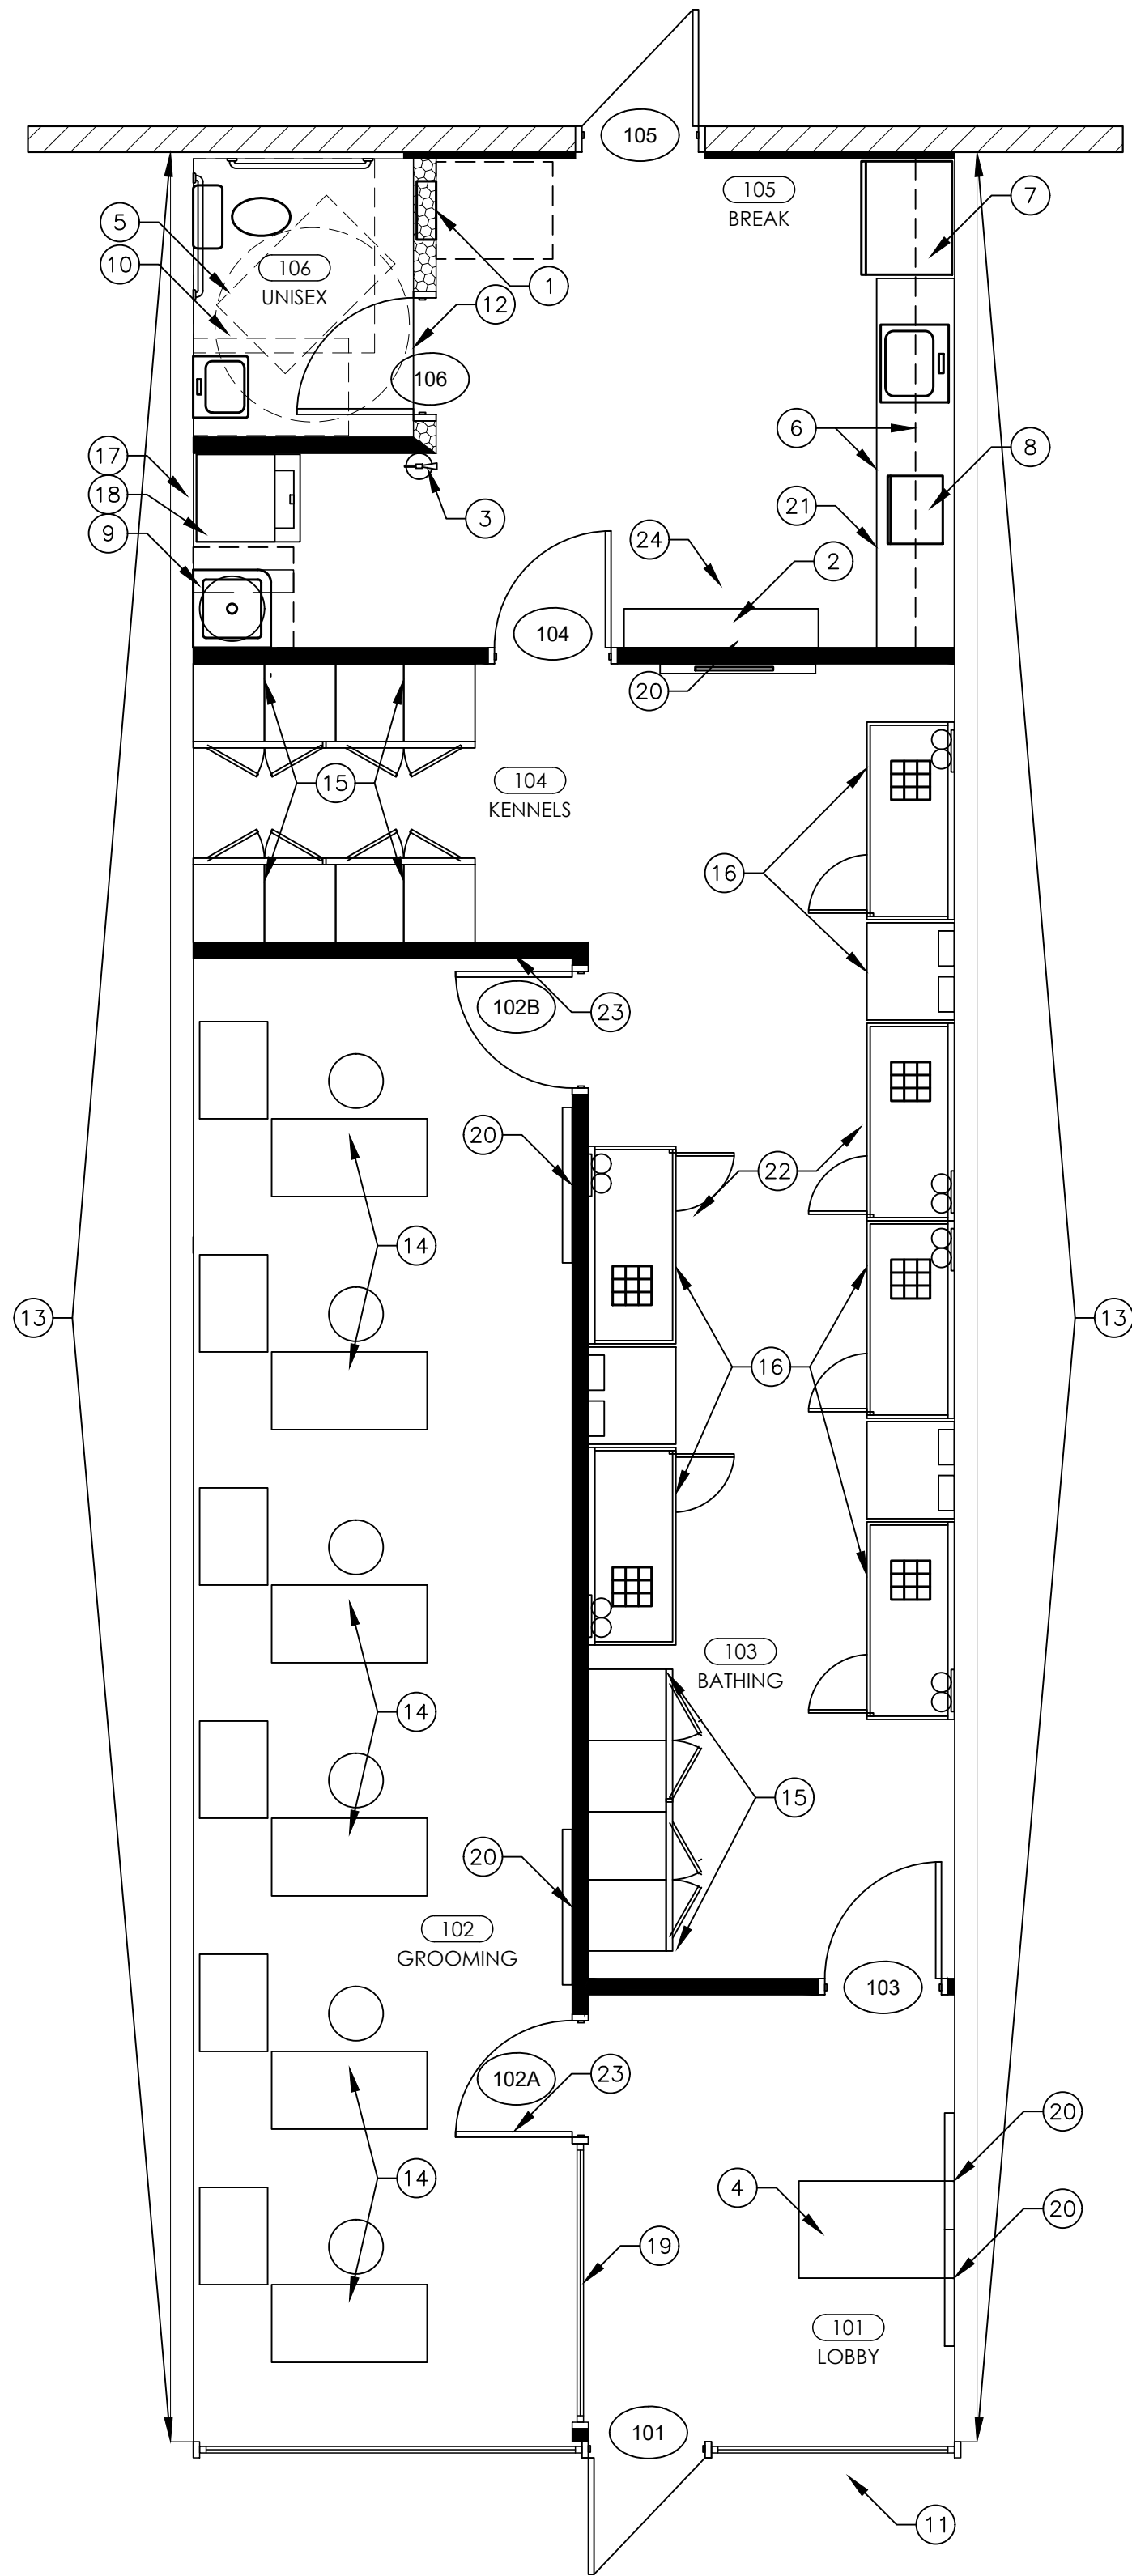


FLOOR PLAN KEYNOTES

#

1. NEW RECESSED ELECTRICAL PANEL "A" LOCATION IN 6" STUD WALL.
2. 24" x 48" x 3/4" PLYWOOD TMB. PAINT TO MATCH SURROUNDING WALLS. EXTEND CONDUIT AND WIRING FROM PREVIOUS TMB LOCATION (SEE DEMO PLAN).
3. FIRE EXTINGUISHER -2A:10BC. TO BE SEMI RECESSED IN WALL IN APPROVED CABINET AT THIS LOCATION.
4. 42" TRANSACTION COUNTER MOUNTED TO PONY WALL BELOW. TENANT SHALL USE ADA COMPLIANT MOBILE TRANSACTION KIOSKS/TABLETS.
5. 30"x48" CLEAR FLOOR SPACE IN TOILET ROOM ALLOWING DOOR TO SWING INTO THE FIXTURE CLEAR FLOOR AREA IN A SINGLE USE TOILET PER ADA 603.2.3, EXCEPTION 2.
6. 34" A.F.F. LOWER CASEWORK WITH 12" DEEP UPPER CASEWORK WITH ADJUSTABLE SHELVES.
7. REFRIGERATOR - BY TENANT, CONTRACTOR TO VERIFY EXACT SIZE OF UNIT PRIOR TO FABRICATION OF CASEWORK.
8. MICROWAVE IN CABINERY BELOW COUNTER PROVIDED BY TENANT, VERIFY SIZE AND LOCATION PRIOR TO FABRICATION OF CASEWORK.
9. WATER HEATER LOCATION ON SHELF ABOVE MOP SINK. SEE DETAIL P11 ON SHEET D-2 AND PLUMBING PLAN SHEET P-1.
10. ADA ACCESSIBLE RESTROOM. SEE DETAILS P1-P3 SHEET D-2 FOR CLEARANCES. EXISTING TOILET TO BE REINSTALLED AFTER TILE WORK IS COMPLETE. PROVIDE NEW TILE FLOORING AND WAINSCOTTING UP TO 48" A.F.F. PROVIDE NEW LAVATORY AND FAUCET (SEE SHEET P-1).
11. READILY VISIBLE DURABLE SIGN POSTED ON EGRESS SIDE ON OR ADJACENT TO DOOR STATING "THIS DOOR TO REMAIN UNLOCKED WHEN SUITE IS OCCUPIED." THE SIGN SHALL BE IN LETTERS 1" (25.4mm) HIGH ON CONTRASTING BACKGROUND.
12. FLOOR TRANSITION LOCATION, SEE FINISH SCHEDULE SHEET A-4.
13. EXISTING TENANT DEMISING WALL. CONTRACTOR SHALL CHECK FOR INSULATION AT DEMISING WALL. PROVIDE INSULATION IN AS FOR SOUND DETONATION. CONTRACTOR SHALL ALSO VERIFY IF EXISTING DEMISING WALL GOES UP TO THE ROOF DECK. EXTEND DEMISING WALL UP TO DECK IF NEEDED. CONTRACTOR AND TENANT SHALL VERIFY SOUND DETONATION REQUIREMENTS WITH THE LANDLORD.
14. CASEWORK/GROOMING STATIONS PROVIDED BY TENANT.
15. DOG KENNELS PROVIDED BY TENANT.
16. DOG WASH STATIONS PROVIDED BY TENANT.
17. WASHER BOX @ WALL. REFER TO SHEET P-1.
18. STACK WASHER DRYER UNIT (PROVIDED BY TENANT) WITH GALVANIZED DRAINAGE PAN - MIN. 2" HIGH SIDES - WELD SEAMS WATER TIGHT. PROVIDE 3/4" DRAIN TO FLOOR SINK. PROVIDE DRYER EXHAUST VENT DUCT, SEE DETAIL M6 / D-2.
19. 1/2" TEMP. GLASS WINDOW @ THIS LOCATION. 6H WINDOW. ALIGN HEADER WITH ADJACENT DOOR. SEE DIMENSION PLAN FOR WINDOW WIDTH. GLASS SHALL BE SPLIT INTO MULTIPLE BUTT GLAZED PANELS IF NEEDED.
20. PROVIDE 2x BLOCKING FOR T.V. CONTRACTOR TO VERIFY HEIGHT AND LOCATION.
21. NOT USED.
22. PROVIDE FRP @ AT ALL WALLS, THIS ROOM.
23. PROVIDE KICK PLATES @ THIS DOOR.
24. 12" DEEP ADJUSTABLE SHELVING TO BE SUPPLIED AND INSTALLED BY CONTRACTOR. SEE DETAIL A16/SHEET D-1.

WALL LEGEND

EXISTING WALLS		EXISTING WALL
NEW WALLS		INTERIOR WALL SEE DETAIL A1, SHEET D-1
		6" WIDTH AT ALL PLUMBING WALLS AS INDICATED.
		TENANT DEMISING WALL SEE DETAIL A2, SHEET D-1

DOOR LEGEND

SEE DETAIL A5, SHEET D-1 FOR REQUIRED DOOR CLEARANCES.


	EXISTING DOOR OR PAIR OF DOORS.
	NEW DOOR OR PAIR OF DOORS: SEE CORRESPONDING NUMBER ON DOOR SCHEDULE ON SHEET A-4

WINDOW LEGEND

	SIZE AS INDICATED ON PLAN, TOP OF WINDOW AT =TOP OF DOOR HEIGHT U.N.O. (TYPICAL) USE TEMPERED GLASS AS REQUIRED.
---	--


GENERAL NOTES

- FURNITURE PLACEMENT SHALL NOT RESTRICT ADA ACCESS REQUIRED.
- CONTRACTOR TO PROVIDE MIN. R-38 BATT INSULATION AT ENTIRE DECK SPACE IF NOT CURRENTLY INSTALLED.
- CONTRACTOR TO PROVIDE MIN. R-19 BATT INSULATION IN ALL FRAMED EXTERIOR WALLS IF NOT ALREADY PROVIDED.
- TENANT TO PROVIDE BLINDS FOR SUN CONTROL TO ALL WINDOWS TO EXTERIOR.
- ROOF PENETRATIONS AND ROOF WORK TO BE PERFORMED BY LANDLORD'S CONTRACTOR IF REQUIRED, VERIFY WITH LANDLORD.
- ANY DISTURBANCE TO THE FLOOR SLAB MUST BE TREATED FOR TERMITE PROTECTION PRIOR TO THE REPLACEMENT OF THE CONCRETE FLOOR.
- CLIENT APPROVED CABINET DRAWINGS TAKE PRECEDENCE FOR ALL PLACEMENT OF PLUMBING OR ELECTRICAL. ALL PLUMBING AND/OR ELECTRICAL PLACEMENT TO BE VERIFIED WITH GENERAL CONTRACTOR PRIOR TO INSTALLATION.
- CONTRACTOR SHALL SKIM COAT AND PAINT ALL EXISTING WALLS. ALL WALLS SHALL BE LEVEL 4 SMOOTH FINISH.

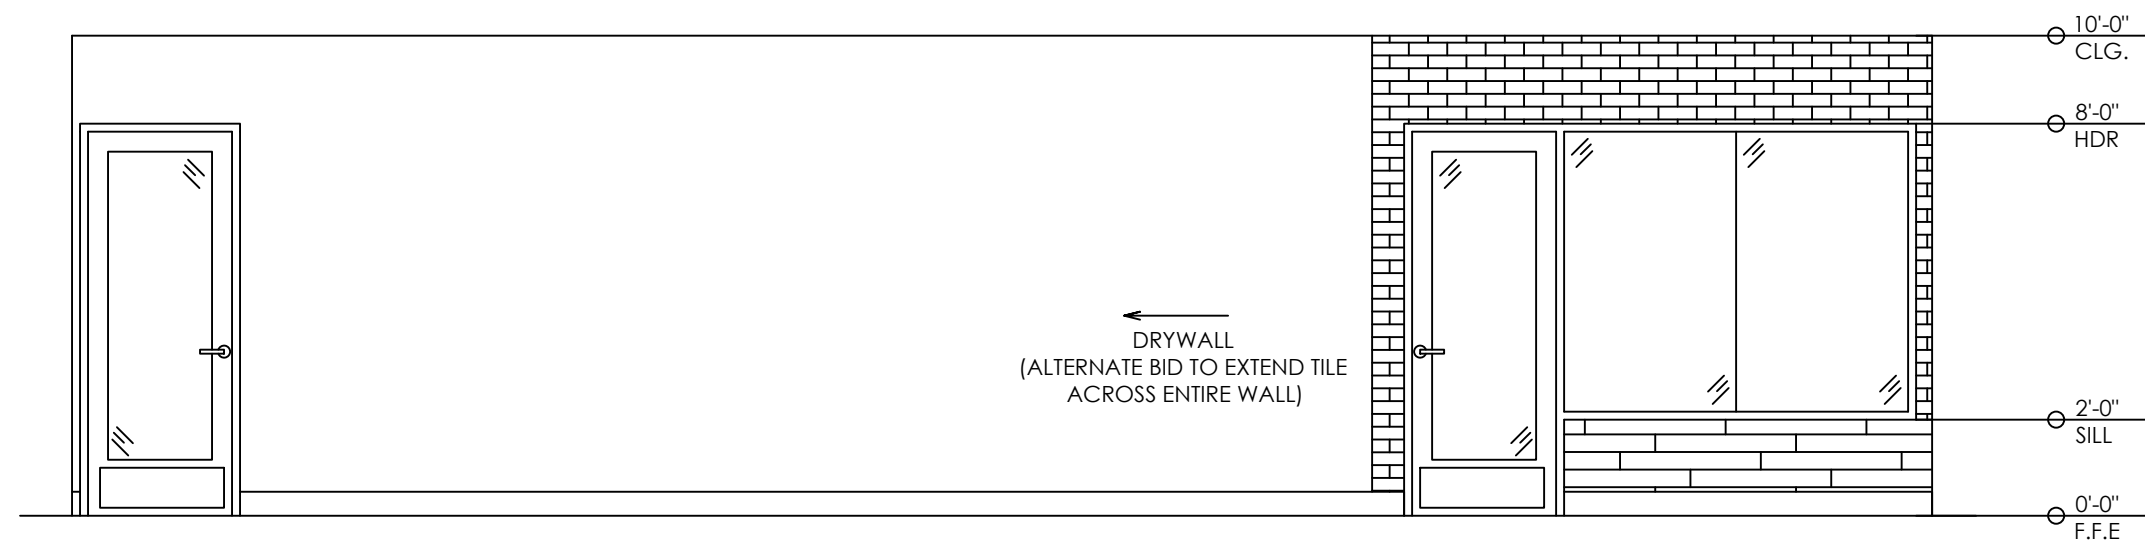



GROOMING ELEVATION - EAST WALL

1/4" = 1'-0"

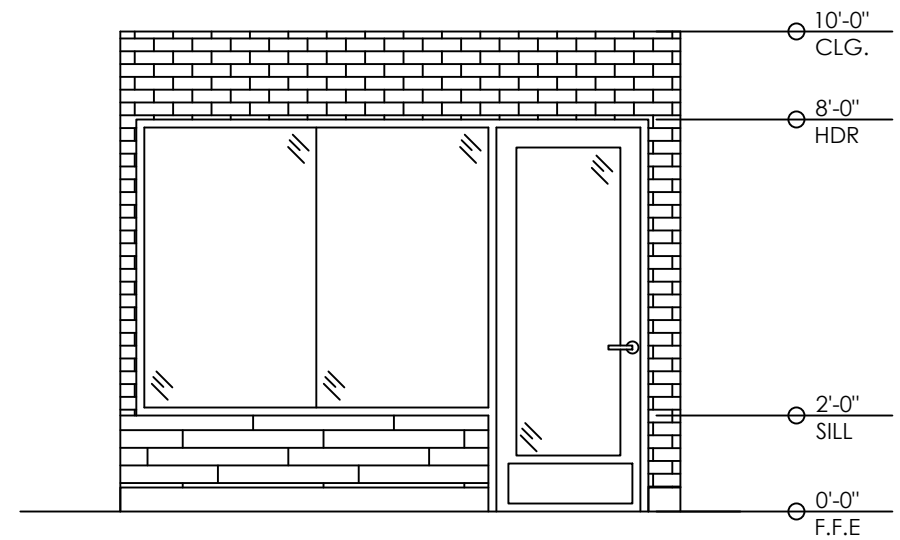

LOBBY ELEVATION - WEST WALL

1/4" = 1'-0"

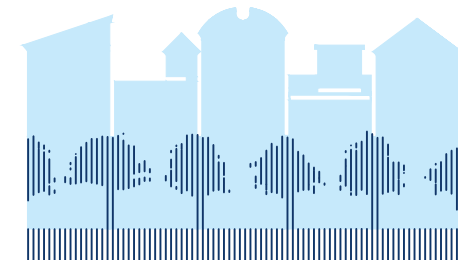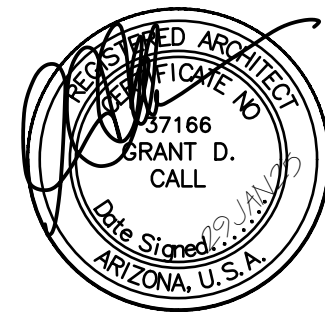

CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net

DRAFTER: GO, DJ, GD, JR

REVISIONS:

- 10'-0" CLG.
- 8'-0" HDR
- 2'-0" SILL
- 0'-0" F.F.E.
- 0'-0" F.F.E.

SPARKLE DOG
CARE


3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025

CS-1140


A-2

FLOOR PLAN

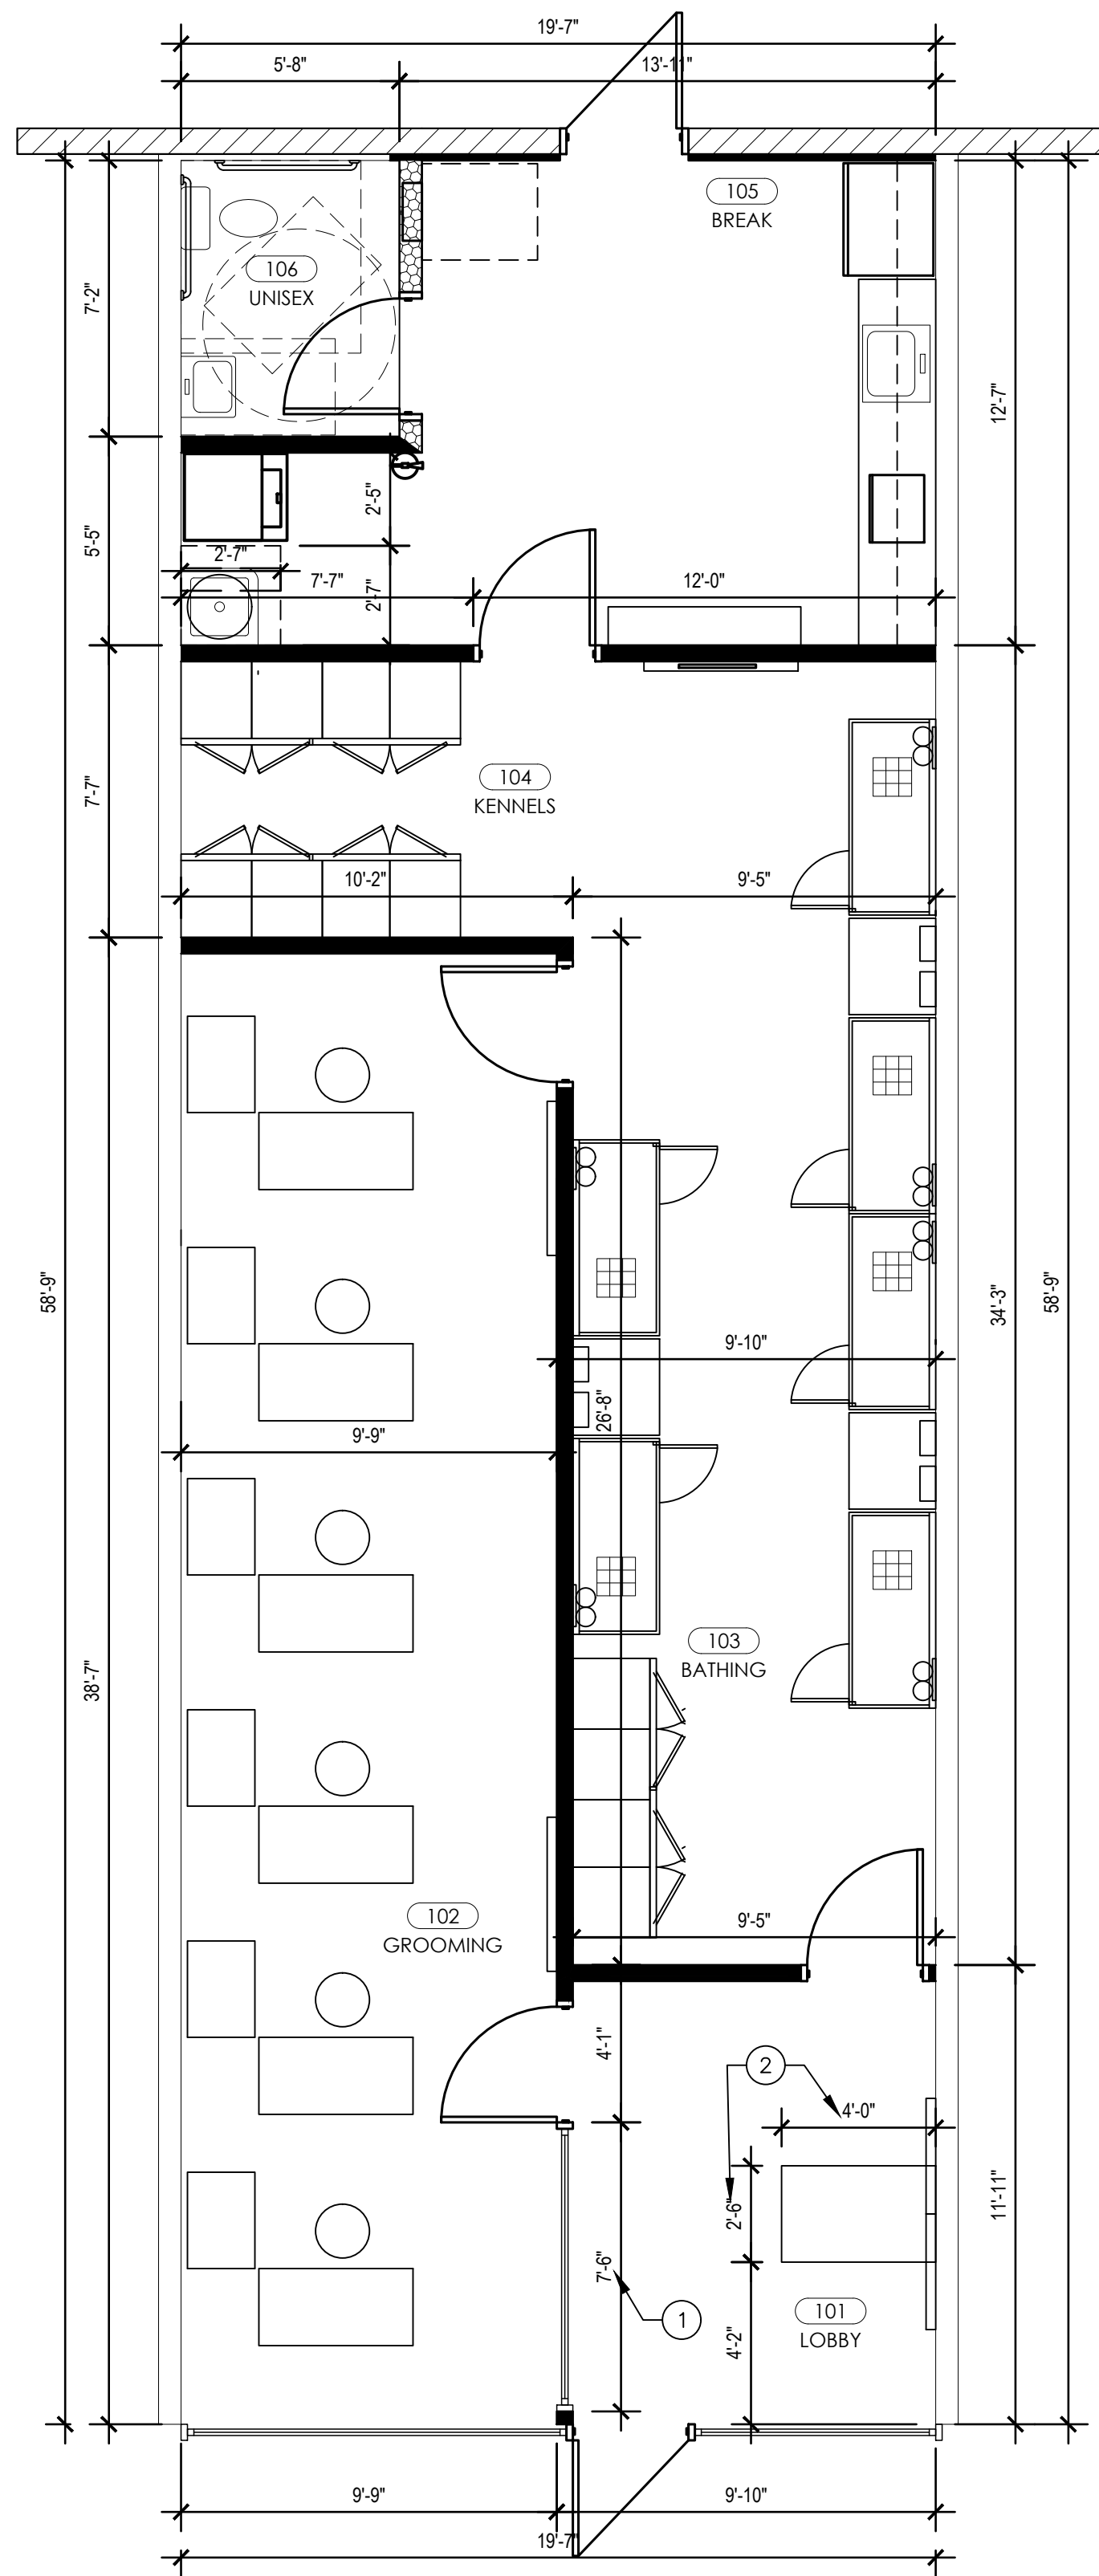

DIMENSION PLAN KEYNOTES

1. DIMENSION OF WINDOWS.

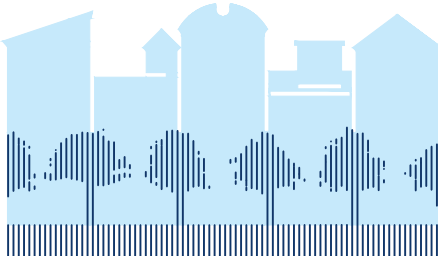

CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net
DRAFTER: GO, DJ, GD, JR

REVISIONS:

- | | |
|---|----|
| 1 | -- |
| 2 | -- |
| 3 | -- |
| 4 | -- |
| 5 | -- |

SPARKLE DOG
CARE

3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025

CS-1140

A-2D

DIMENSION PLAN

GENERAL NOTES




- A. FURNITURE PLACEMENT SHALL NOT RESTRICT ADA ACCESS REQUIRED.
- B. CONTRACTOR TO PROVIDE MIN. R-38 BATT INSULATION AT ENTIRE DECK SPACE IF NOT CURRENTLY INSTALLED.
- C. CONTRACTOR TO PROVIDE MIN. R-19 BATT INSULATION IN ALL FRAMED EXTERIOR WALLS IF NOT ALREADY PROVIDED.
- D. TENANT TO COORDINATE WITH LANDLORD FOR PROVIDING BLINDS FOR SUN CONTROL TO ALL WINDOWS TO EXTERIOR.
- E. ROOF PENETRATIONS AND ROOF WORK TO BE PERFORMED BY LANDLORD'S CONTRACTOR IF REQUIRED. VERIFY WITH LANDLORD.

CEILING PLAN KEYNOTES

#

1. PROVIDE ALLOWANCE FOR ACCESS PANELS @ DRYWALL CEILINGS. COORDINATE EXACT PLACEMENT OF ACCESS PANELS WITH THE INSPECTOR.

CEILING LEGEND

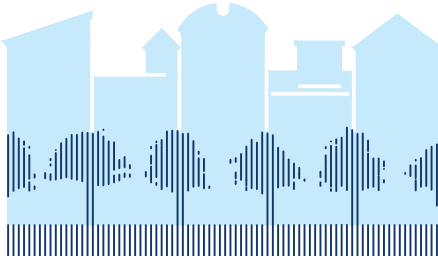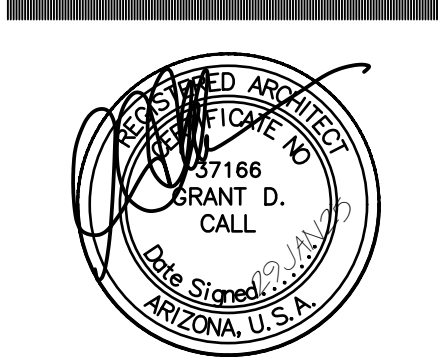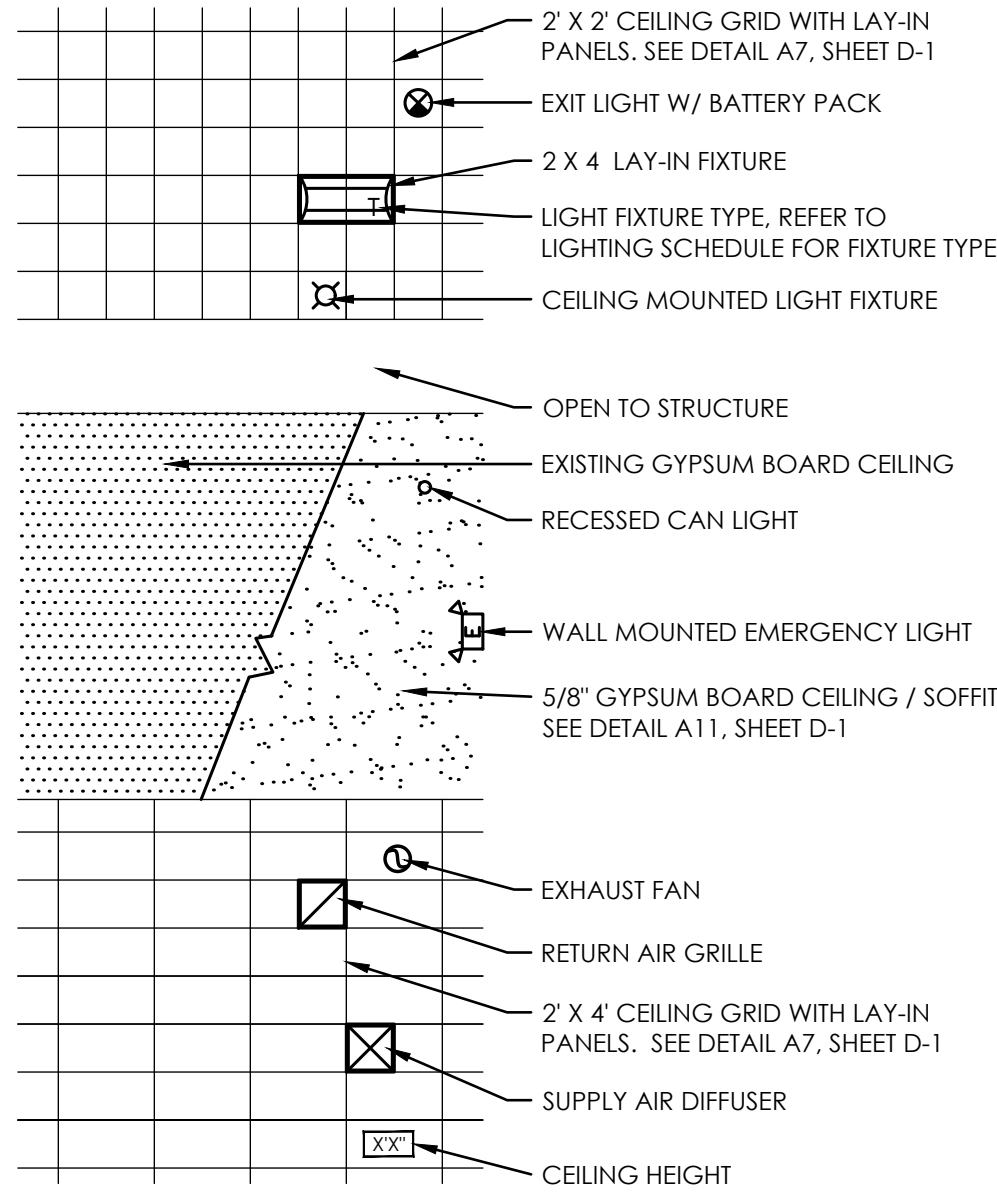


CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net

DRAFTER: GO, DJ, GD, JR

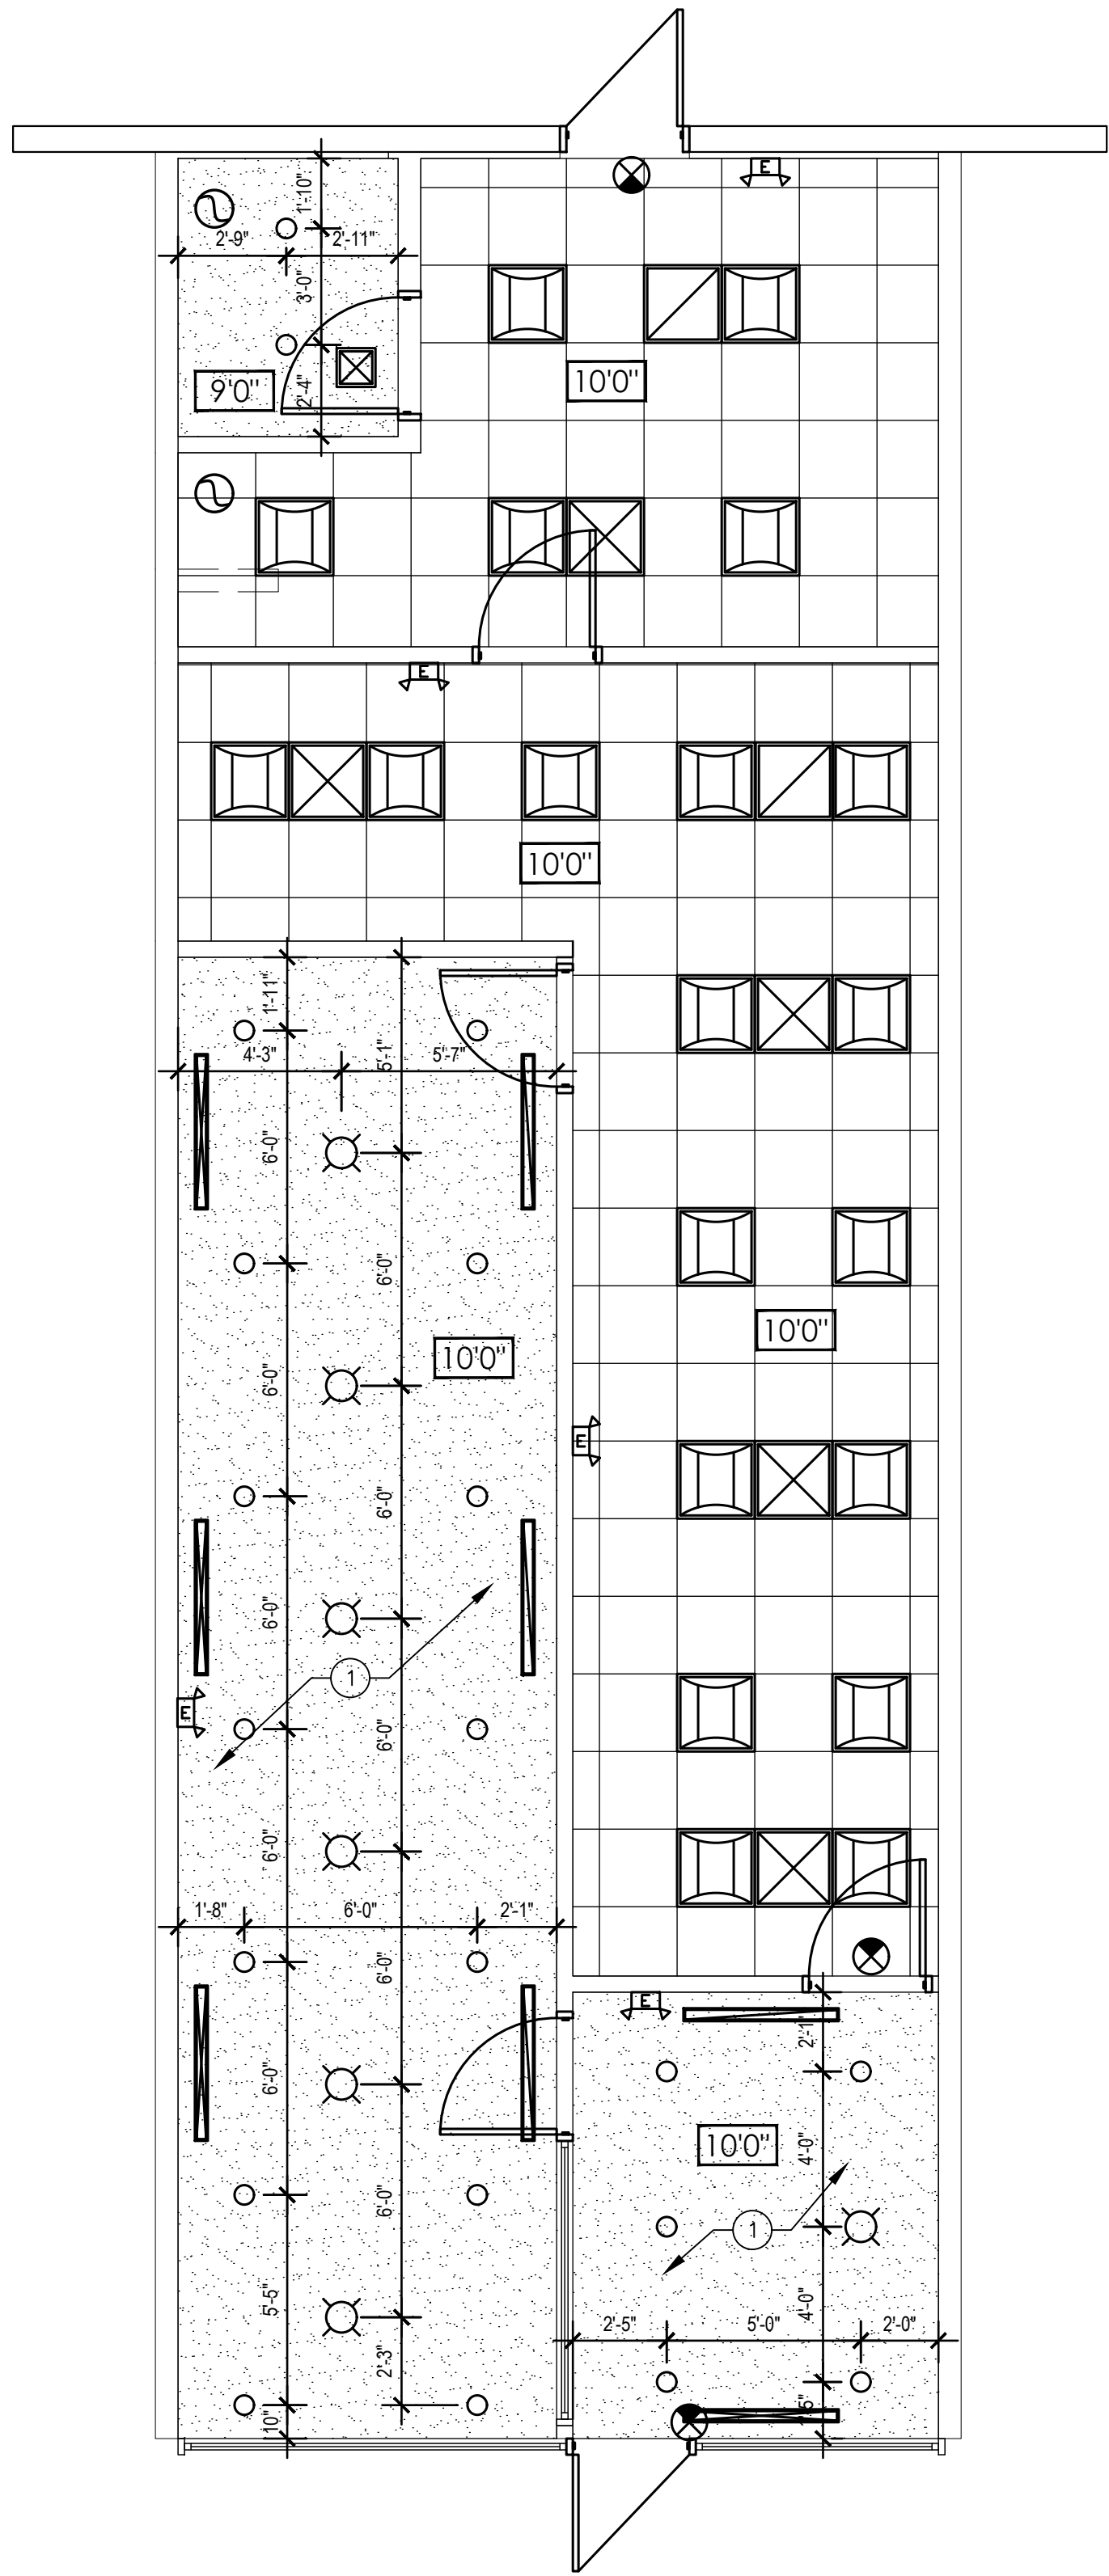

ROOM FINISH SCHEDULE

SEE DIVISION 9 OF THE SPECIFICATIONS, CONTAINING IMPORTANT INFORMATION RELATING TO BUILDING CODES, CITY ORDINANCES, MATERIALS AND METHODS.		FLOOR				BASE	WAINSCT.	WALL			CEILING			CABINETY		REMARKS									
		CERAMIC TILE	LUXURY VINYL PLANK	CONCRETE/SEALED	EXISTING FLOORING	4" HIGH RUBBER	PAINTED WOOD	CERAMIC TILE	EXISTING BASE	CERAMIC TILE TO +48" A.F.F.	FRP PANELS - FULL HEIGHT	GYP. BOARD, PAINT (P1)	GYP. BOARD, PAINT (P2)	1/2" SOUND BOARD	MARBITE - FULL WALL HEIGHT		SOUND BATT INSULATION IN WALL	SUSP. GRID/ACoust. TILE "A"	SUSP. GRID/ACoust. TILE "B"	GYP. BOARD PAINT	SOUND BATT INSULATION ABOVE	EXISTING CEILING	COUNTER TOPS, AND SPLASH	CABINET FACE	TRANSACTION COUNTER
101	LOBBY	•									•	•	•	•	•	•						Q21	PL1	-	-
102	GROOMING ROOM	•									•	•	•	•	•	•									
103	BATHING/ PREP	•									•	•	•	•	•	•									
104	KENNELS	•				•					•	•	•	•	•	•									
105	BREAK	•				•					•	•	•	•	•	•							PL2	PL1	
106	UNISEX	•									•	•	•	•	•	•									

GENERAL NOTES					REMARKS				
A. FLOORS IN RESTROOMS SHALL HAVE A SMOOTH, HARD NONABSORBENT SURFACE SUCH AS PORTLAND CEMENT, CERAMIC TILE, CONCRETE, OR OTHER APPROVED MATERIAL WHICH EXTENDS UPWARD ONTO THE WALLS AT LEAST 6 INCHES.					1. NONE.				
B. PROVIDED WATER-RESISTANT GYPSUM BOARD, GREEN BOARD, OR OTHER APPROVED MATERIAL ON THE WALLS IN RESTROOMS.									
C. WALLS IN RESTROOMS WITHIN 2 FEET OF THE FRONT AND SIDES OF URINALS AND WATER CLOSETS SHALL HAVE A SMOOTH, HARD NONABSORBENT SURFACE TO A HEIGHT OF 4 FEET.									
D. PROVIDE MATERIAL SAMPLES FOR APPROVAL OF ALL FINISHES.									

	MANUFACTURER & MODEL #		STYLE	COLOR/ FINISH	REMARKS
PAINT					
PAINT COLOR P-1	SHERWIN WILLIAMS -	PROMAR 200 ZERO VOC	SW7006 EXTRA WHITE	- -	
PAINT COLOR P-2	SHERWIN WILLIAMS -	PROMAR 200 ZERO VOC	SW7069 IRON ORE	- -	

FLOORS				
LVT FLOORING	RESILIENT LVT OR EQUAL	COOL POLISHED CEMENT 20X20	A00302	-
CERAMIC TILE (RESTROOMS)	TO BE CHOSEN BY TENANT	-	COLOR TO BE CHOSEN BY TENANT	CONTRACTOR TO USE \$20/SF INSTALLED

BASES				
RUBBER BASE	ROPPE OR EQUAL	4" COVE	BLACK	-
PAINTED WOOD BASE	1X6	1X6 FLAT MATCH FLOOR TILE	SW7757	LOBBY AND GROOMING ROOM

WAINSCOT/ACCENT WALL TILE				
CERAMIC TILE WAINSCOTT	TILE CLUB 4X12	-	WHITE MATTE CERAMIC SUBWAY	LOBBY LOGO WALL, ABOVE WINDOWS @ LOBBY & GROOMING
LVT WAINSCOTT WAINSCOTT	NORTHERN GRAIN VINYL PLANT 10X40	A02606 - ANTIQUE WASH	A02606 - ANTIQUE WASH	BELOW WINDOWS @ LOBBY & GROOMING

CEILING				
GRID TYPE "A"	CERTAIN TEED CEILINGS	GRID (15/16") 24" X 24"	WHITE METAL	-
CEILING TILE "A"	CERTAIN TEED CEILINGS	SAND MICRO 24" X 24"	WHITE	-

CABINETY FINISHES				
PL-1	TBD	TBD	TBD	-
PL-2	TBD	TBD	TBD	-
QZ-1	TBD	TBD	TBD	CONTRACTOR TO USE \$80/SF INSTALLED

IgCC LOW-VOC FINISH MATERIALS	
NEWLY INSTALLED INTERIOR WALL, CEILING, AND FLOOR FINISH MATERIALS, INCLUDING NEW CARPETING AND CEILING TILES SHALL COMPLY WITH LOW-VOC LIMITS OF SCOTSDALE AMENDED SECTION 801.4.2 OF THE INTERNATIONAL GREEN CONSTRUCTION CODE (IgCC)	
801.4.2.1 ADHESIVES AND SEALANTS	
801.4.2.2 PAINTS AND COATINGS	
801.4.2.3 FLOOR COVERING MATERIALS	
801.4.2.4 COMPOSITE WOODS, AGRIFIBER AND LAMINATED PRODUCTS	
801.4.2.6 CEILING TILE AND WALL SYSTEMS (EXCLUDING OFFICE FURNITURE SYSTEMS)	
FLOOR COVERING MATERIALS, CEILING TILES, AND WALL SYSTEM PRODUCTS CERTIFIED UNDER NATIONALLY RECOGNIZED THIRD PARTY LOW-EMISSION CERTIFICATION PROGRAMS SUCH AND CARPET AND RUG INSTITUTE GREEN LABEL PLUS, RESILIENT FLOOR COVERING INSTITUTE FLOORSCORE AND UL GREENGUARD, ARE DEEMED TO COMPLY WITH IgCC EMISSION LIMITS	

IgCC TABLE 801.4.2.2	
VOC CONTENT LIMITS FOR PAINTS AND COATINGS	
CATEGORY	VOC LIMIT grams per liter [g/L] ^{a,b}
FLAT PAINTS	50
NONFLAT PAINTS	50
NONFLAT HIGH-GLOSS PAINTS	150
SPECIALTY COATINGS:	
CONCRETE/MASONRY SEALERS	100
FLOOR COATINGS	50
PRIMERS, SEALERS, AND UNDERCOATS	100
STAINS	250
WOOD COATINGS	275

- A. LIMITS ARE EXPRESSED AS VOC REGULATORY, THINNED TO THE MANUFACTURER'S MAXIMUM THINNING RECOMMENDATION, EXCLUDING ANY COLORANT ADDED TO TINT BASES.
- B. VALUES IN THIS TABLE ARE DERIVED FROM THOSE SPECIFIED BY THE CALIFORNIA AIR RESOURCES BOARD SUGGESTED CONTROL MEASURE FOR ARCHITECTURAL COATINGS DATED MAY 2020.

DOOR SCHEDULE

		SEE DIVISION 8 OF THE SPECIFICATIONS, CONTAINING IMPORTANT INFORMATION RELATING TO BUILDING CODES, CITY ORDINANCES, MATERIALS AND METHODS.	FRAME					DOOR					RATING			HARDWARE					REMARKS									
			TIMELY METAL - PREFINISHED FRAMELESS	ALUMINUM STOREFRONT	POCKET FRAME	BIFOLD	EXISTING FRAME	PAIR	3'-0" X 7'-0" X 1-3/4"	EXIST. 3'-0" X 8'-0"	3'-0" X 8'-0" X 1-3/4"	SOLID CORE WOOD	ONE-LITE, TEMPERED GLASS	ALUMINUM STOREFRONT	BARN DOOR	PANT	FACTORY STAIN FINISH	EXISTING DOOR	20 MINUTE	45 MINUTE		90 MINUTE	GROUP A	GROUP B	GROUP C	GROUP D	GROUP E	GROUP P	EXISTING HARDWARE	
101	LOBBY																													
102A	GROOMING ROOM		•												•							•							•	2
102B	GROOMING ROOM		•												•							•								5
103	BATHING/ PREP		•												•							•								5
104	KENNELS		•												•							•								
105	BREAK														•													•	1	
106	UNISEX		•												•							•								

GENERAL NOTES					REMARKS				
A. NONE.					1. DOOR TO BE LOCKED AND CLOSED AT ALL TIMES. ENTRANCE FOR SERVICE ONLY. 2. EXISTING ADA ACCESSIBLE STOREFRONT DOOR. 3. FROSTED GLASS. 4. DOOR AND FRAME TO BE PAINTED SW6905 GOLDFINCH. 5. PROVIDE KICK PLATES.				

	MANUFACTURER & MODEL #		STYLE	COLOR/ FINISH	REMARKS
DOORS & FRAMES					
INTERIOR DOORS	MATCH BUILDING STANDARD OR EQUAL		PAINTED -	SW7006 EXTRA WHITE	FLUSH -
EXTERIOR DOORS	MATCH BUILDING STANDARD OR EQUAL		MATCH BUILDING STANDARDS	MATCH BUILDING STANDARDS	-
INTERIOR FRAMES	HOLLOW METAL -		PAINTED -	SW7006 EXTRA WHITE	-

HARDWARE GROUPS				
HARDWARE GROUP A	SCHLAGE OR EQUAL	LATCH SET SINGLE ACTION, LEVER TYPE	SATIN CHROME	1 1/2 PAIR HINGES SILENCERS
HARDWARE GROUP B	SCHLAGE OR EQUAL	LOCK SET SINGLE ACTION, LEVER TYPE	SATIN CHROME	1 1/2 PAIR HINGES SILENCERS
HARDWARE GROUP C	SCHLAGE OR EQUAL	PRIVACY SET SINGLE ACTION, LEVER TYPE	SATIN CHROME	1 1/2 PAIR HINGES SILENCERS
HARDWARE GROUP D	SCHLAGE OR EQUAL	LOCK SET PANIC HARDWARE	SATIN CHROME	1 1/2 PAIR HINGES, SILENCERS CLOSER, ALUMINUM THRESHOLD
HARDWARE GROUP E	SCHLAGE OR EQUAL	LOCK SET SINGLE ACTION, LEVER TYPE	SATIN CHROME	1 1/2 PAIR HINGES, SILENCERS CLOSER, SMOKE SEAL
HARDWARE GROUP P	SCHLAGE OR EQUAL	POCKET DOOR HARDWARE	SATIN CHROME	DOUBLE PULL BAR HARDWARE AT EACH SIDE OF DOOR

NOTES	
A. VERIFY ALL FINISHES AND SELECTIONS WITH CONTRACTOR AND CLIENT PRIOR TO ORDERING. NO CONSIDERATION WILL BE GIVEN TO MATERIALS ORDERED WITHOUT AUTHORIZATION.	

ARCHITECTURAL SPECIFICATIONS

- DIVISION 3
CONCRETE
1. CLEAN, GRIND, FILL AND LEVEL ALL EXISTING CONCRETE TO RECEIVE NEW FLOORING, STAINING OR SEALING.
2. FLOORS TO RECEIVE SHEET VINYL OR CERAMIC TILE SHALL NOT VARY MORE THAN 1/4" PER 10 FEET.
3. BACK POURED CONCRETE, WHERE SAW CUTTING HAS OCCURRED, SHALL BE SMOOTH AND LEVEL AND HAVE A FINISH TO MATCH THE ADJACENT CONCRETE. USE 2,500 PSI CONCRETE OR HIGHER. PROVIDE #4 X 12" REBAR DOWELS AT 48" O/C, DRILLED AND EPOXY-DOWELED INTO THE SIDE OF THE EXISTING CONCRETE AT ALL SAW CUT TRENCHES.
4. ALL TRENCHES SHALL BE BACKFILLED IN LIFTS OF NOT GREATER THAN 8" AND RE-COMPACTED TO 90% OF EXISTING SOIL/PAD COMPACTION.

- DIVISION 7
INSULATION
1. PROVIDE NON-KRAFT FACED FIBERGLASS BATT INSULATION IN THE FOLLOWING LOCATIONS:

A. AT ALL BUILDING EXTERIOR WALLS IN CONDITIONED SPACES: 2" OR 4" INSULATING BATTS TO MATCH DEPTH OF FURRING. CONTRACTOR MAY USE RIGID FOAM INSULATION AT HIS OPTION.

B. AT ALL TENANT DEMISING WALLS: 4" OR 6" INSULATING BATTS TO MATCH SIZE OF DEMISING WALL STUDS.

C. AT ALL WALLS SEPARATING CONDITIONED SPACE FROM EVAPORATIVE COOLED OR NON-CONDITIONED SPACE: 4" OR 6" INSULATING BATTS TO MATCH SIZE OF DEMISING WALL STUDS.

D. AT ALL TOILET ROOM WALLS AND CEILINGS: 4" SOUND BATTS.

E. AT ALL ROOMS CONTAINING ELECTRICAL TRANSFORMERS: 4" INSULATING BATTS IN WALLS AND ABOVE CEILING.

F. AT OTHER LOCATIONS, IF ANY, AS SPECIFIED ON THE FLOOR PLANS: 4" SOUND BATTS.
2. INSULATION BOTH THERMAL AND ACOUSTIC TO HAVE A FLAME SPREAD INDEX OF NOT MORE THAN 25 AND A SMOKE DEVELOPED INDEX OF NOT MORE THAN 450. (IBC 803.8, IBC 719 AND ASTM E84).

- DIVISION 8
DOOR AND FRAMES
1. ALL EXITS SHALL BE OPERABLE FROM THE INSIDE WITHOUT THE USE OF A KEY OR SPECIAL KNOWLEDGE OR EFFORT.
2. MANUALLY OPERATED EDGE OR SURFACE MOUNTED FLUSH BOLTS AND SURFACE BOLTS ARE PROHIBITED.
3. ITEM 1 NEED NOT APPLY TO THE FRONT DOOR OF A PLACE OF BUSINESS AS LONG AS A SIGN IS PLACED ABOVE THE DOOR IN 2" BLOCK LETTERS WITH CONTRASTING BACKGROUND THAT READS, "THIS DOOR TO REMAIN UNLOCKED WHEN BUILDING IS OCCUPIED".

- WINDOWS AND GLASS
1. ALL GLASS SUBJECT TO HUMAN IMPACT SHALL CONFORM TO THE STANDARDS SET FORTH IN SECTION 2406 OF THE INTERNATIONAL BUILDING CODE.
2. GLASS: MATCH EXISTING THICKNESS, DESIGN AND FEATURES OF EXISTING GLASS. OTHERWISE USE 1/2" FLOAT OR TEMPERED AS REQUIRED BY NOTE 1 ABOVE.

- HARDWARE:
1. ALL HARDWARE SHALL MATCH EXISTING HARDWARE IN FINISH AND STYLE AT ALL REMODELED SPACES.

- DIVISION 9
FINISHES
1. REPAIR ALL EXISTING WALLS, FLOORS AND CEILINGS THAT ARE TO REMAIN, REPAIR TO "LIKE NEW" CONDITION, MATCHING ALL NEW WORK IN QUALITY, COLOR AND MATERIALS.
2. SMOKE AND FLAME SPREAD FOR INTERIOR FINISHES FOR WALLS AND CEILING TO BE PER ASTM E84 AND IBC 803. FOR B OCCUPANCIES IN A SPRINKLERED SUITE:

EXIT ENCLOSURES AND EXIT PASSAGEWAYS CLASS B (FLAME SPREAD 26-75, SMOKE DEVELOPED 0-450)

CORRIDORS CLASS C (FLAME SPREAD 76-200, SMOKE DEVELOPED 0-450)

ROOMS AND ENCLOSED SPACES CLASS C (FLAME SPREAD 76-200, SMOKE DEVELOPED 0-450)
3. ALL EXTERIOR BUILDING WALLS IN CONDITIONED SPACES UPON COMPLETION OF THE PROJECT SHALL RECEIVE 2" METAL STUD FURRING, BATT INSULATION AND GYP. BOARD WITH WALL FINISHES TO MATCH ADJACENT WALLS.
4. WALL FINISH NOTES:

A. AT NEW WALLS IN NEW AREAS: LEVEL 4 SMOOTH, EGGSHELL LATEX PAINT.

B. AT NEW WALLS IN EXISTING AREAS: WALL FINISH TO MATCH EXISTING WALLS, EGGSHELL LATEX PAINT.

C. AT EXISTING WALLS: REPAIR TO "LIKE NEW" CONDITION MATCHING ALL NE WORK IN QUALITY. REPAINT WITH EGGSHELL LATEX PAINT.

D. AT WALLS TO RECEIVE WALL COVERING: SMOOTH FINISH, NO TEXTURE, PAINT WITH WALL PRIMER.

E. ALL WALLS SHALL HAVE SQUARE CORNER BEAD, TYP.

F. ALL GYP BOARD SOFFITS SHALL HAVE SQUARE CORNER BEAD, TYP.

G. ALL WALLS AND CEILING IN RESTROOMS SHALL BE PAINTED WITH SEMI-GLOSS LATEX PAINT.
5. FLOOR FINISH NOTES:

A. ALL FLOOR TO RECEIVE CERAMIC TILE SHALL HAVE A MAXIMUM OF 1/4" PER FOOT SLOPE ACROSS PER 10'X10' AREA.

B. ALL FLOOR EXPANSION JOINTS, PATCHES AND IMPERFECTIONS SHALL BE PREPARED WITH EPOXY TYPE FLOOR LEVELER AND/OR FILLER PRIOR TO FINAL FLOOR COVERING INSTALLATION.

C. ALL FLOOR FINISHES ARE AS INDICATED ON THE ROOM FINISH SCHEDULE. WITH FINAL COLOR AND STYLE SELECTIONS BY OWNER/TENANT.

D. CARPET AND INTERIOR FLOOR FINISHES COMPRISED OF FIBERS IN VERTICAL EXITS, EXIT PASSAGEWAYS AND EXIT ACCESS CORRIDORS SHALL NOT BE LESS THEN CLASS II IN ACCORDANCE WITH NFPA 253. IN ALL OTHER AREAS THE INTERIOR FLOOR FINISHES SHALL COMPLY WITH THE DOC FF-1 "PILL TEST"(CPSC 16 CFR, PART 1630). IN A SPRINKLERED BUILDING, MATERIALS COMPLYING WITH THE "PILL TEST" MAY BE USED WHERE CLASS II ARE REQUIRED.

E. TRANSITIONS BETWEEN MATERIALS TO BE WITH SLEUTER TRIM OR EQUIVALENT. MAXIMUM 1/8" TOLERANCE BETWEEN ELEVATIONS OF FINISHED MATERIALS.

- DIVISION 10
SPECIALTIES
1. GRAB BARS: AS MANUFACTURED BY FRANKLIN BRASS. ALL GRAB BARS MUST BE INSTALLED SO AS TO RESIST A VERTICAL LOAD OF 300 LBS. MINIMUM.

GB1: 36" STAINLESS STEEL #6436

GB2: 48" STAINLESS STEEL #6448

GB3: 18" STAINLESS STEEL #6412
2. TOILET PARTITIONS: BAKED ENAMEL FINISH, FLOOR SUPPORTED, METAL PARTITIONS AS MANUFACTURED BY: GENERAL PARTITIONS MFG.,CORP PARTITION MANUFACTURERS OF AMERICA, INC.

TEL: 814-833-1154 FAX: 814-838-3473 TEL: 516-623-0222 FAX: 516-623-5809
3. TOILET ACCESSORIES: ALL ITEMS AS MANUFACTURED BY BOBRICK-CONTURA SERIES

PROVIDE ONE EACH AT EACH SINGLE USE TOILET:

- TOILET PAPER DISPENSER, #B-4288

- TOILET SEAT COVER DISPENSER, #B-4221

- SOAP DISPENSER, #B-4112

- WASTE RECEPTACLE, #B-277

- PAPER TOWEL DISPENSER, #B-4262

- MIRROR 24" X 36", #B-165 2436

- SANITARY NAFKIN DISPOSAL, #B-270 (WOMEN'S SINGLE USE TOILET ONLY)
4. LOCKERS: BAKED ENAMEL FINISH, METAL LOCKERS AS MANUFACTURED BY LOCKERS, INC. OR EQUIVALENT.
5. FIRE EXTINGUISHERS: AS REQUIRED BY LOCAL JURISDICTION.

- DIVISION 12
FURNISHINGS
- CASEWORK
1. DETAILED CASEWORK DRAWINGS ARE NOT A PART OF THE SCOPE OF THESE DOCUMENTS. CONTRACTOR SHALL WORK WITH A CASEWORK SUBCONTRACTOR AND THE OWNER/TENANT TO DETERMINE THE LAYOUT AND QUANTITY OF ALL CASEWORK DIAGRAMMATICALLY SHOWN ON THE FLOOR PLANS.
2. PROVIDE CASEWORK AS INDICATED IN THESE DOCUMENTS, PROVIDE SHOP DRAWINGS FOR CITY SPACES TO REVIEW PRIOR TO MANUFACTURING SHOWING THE TYPE OF FABRICATION PROPOSED.
3. PROVIDE CASEWORK WITH ALL NECESSARY HARDWARE, HINGES AND PULLS.



CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net
DRAFTER: GO, DJ, GD, JR

REVISIONS:

1

2

3

4

5

SPARKLE DOG
CARE

3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025


CS-1140

A-4

SCHEDULES



8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

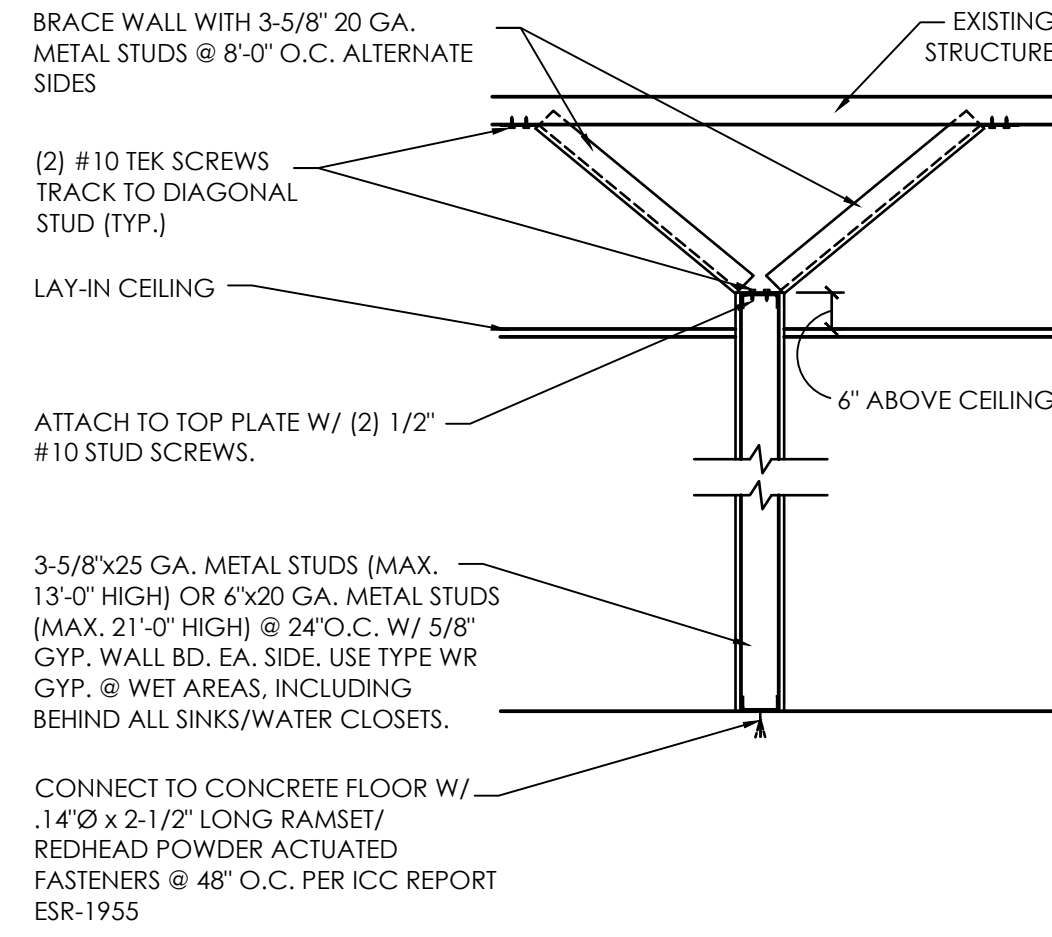


NOT TO SCALE




1 --
2 --
3 --
4 --
5 --

ARCHITECTURAL DETAILS

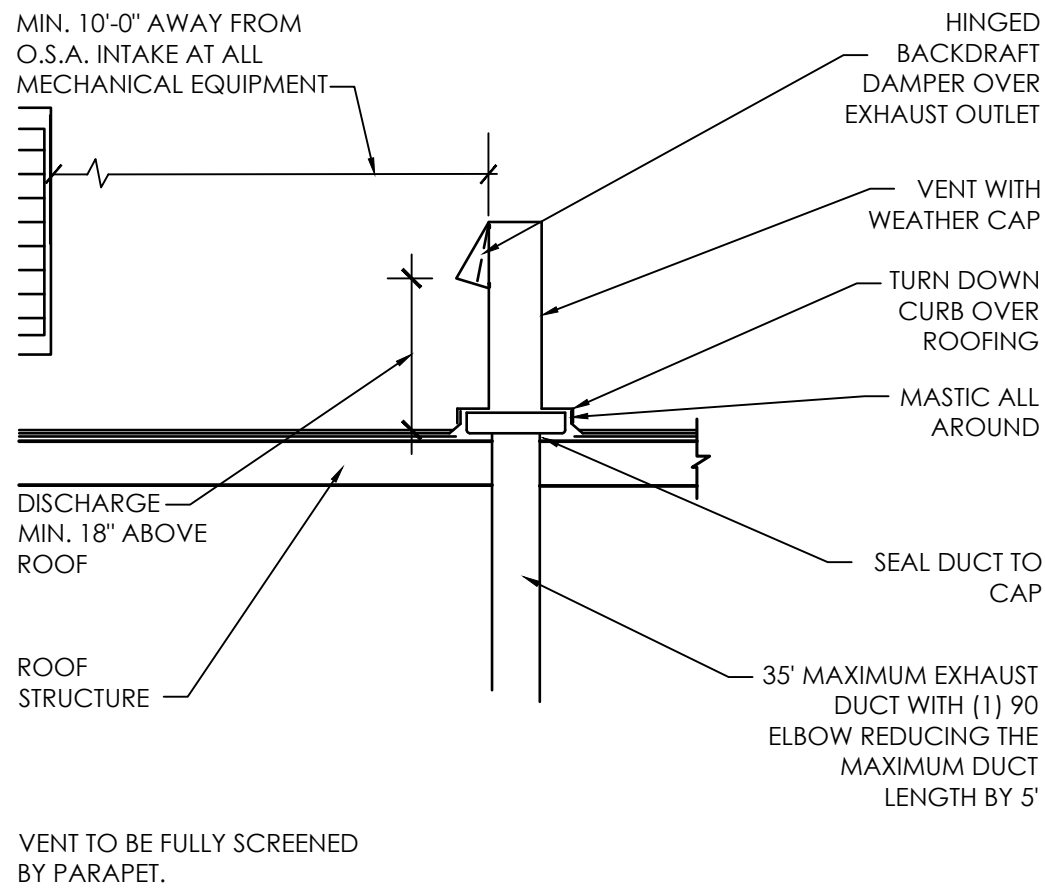


M5 DRYER EXHAUST THRU ROOF

NOT TO SCALE

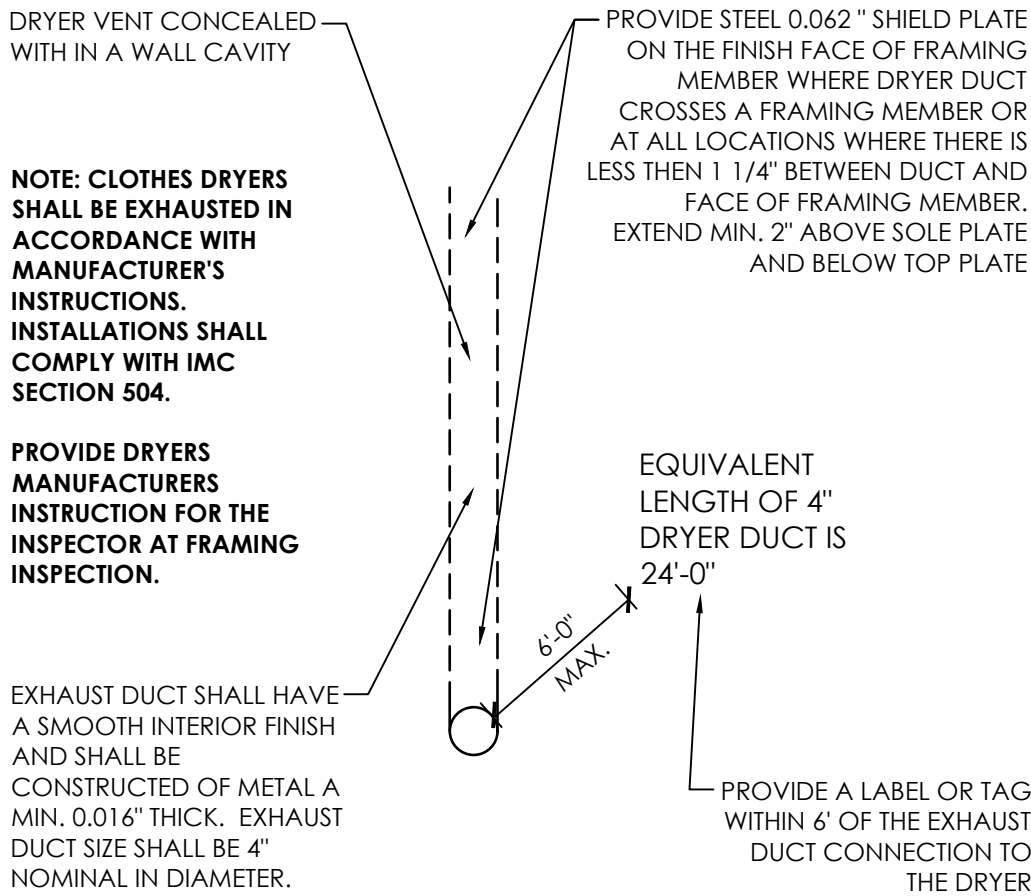



M6 DRYER VENT

NOT TO SCALE

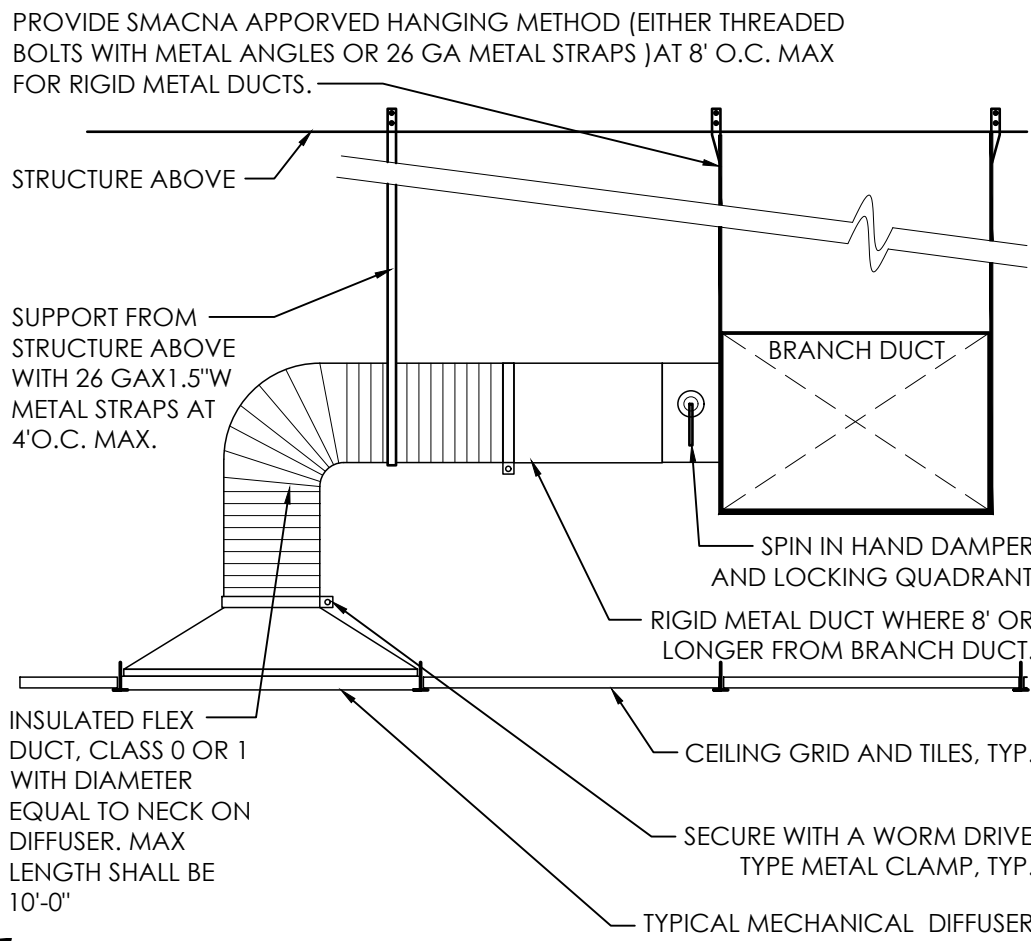


M7 DUCT SUPPORT DETAIL

NOT TO SCALE

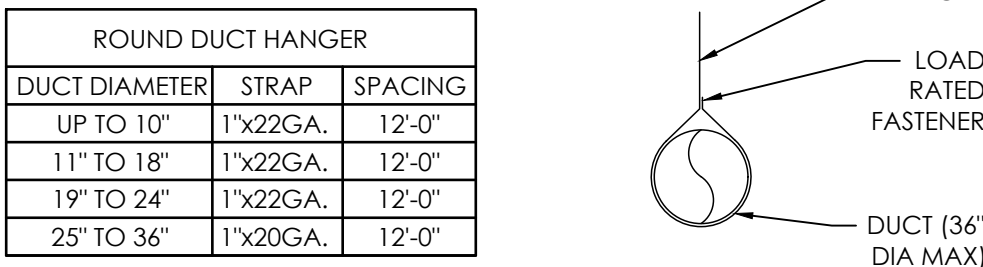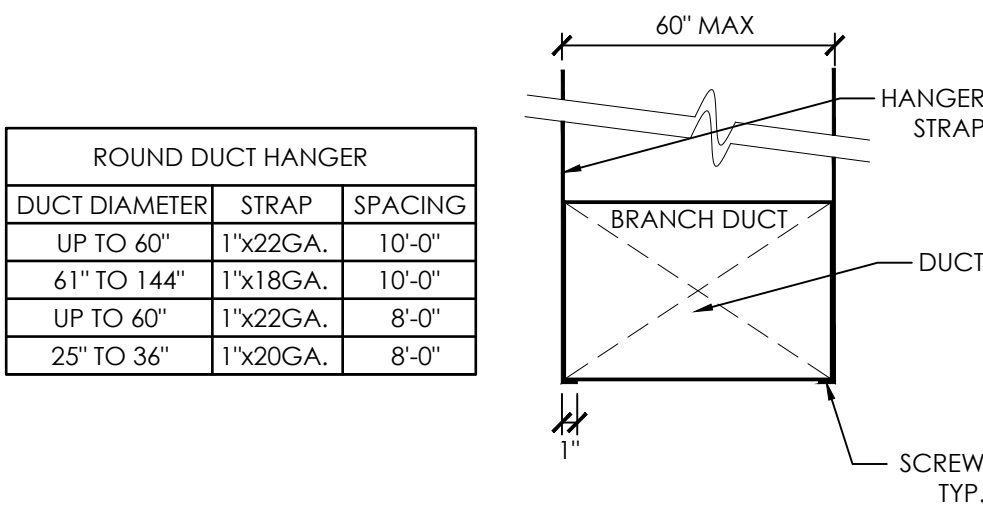


M8 DUCT HANGER

NOT TO SCALE

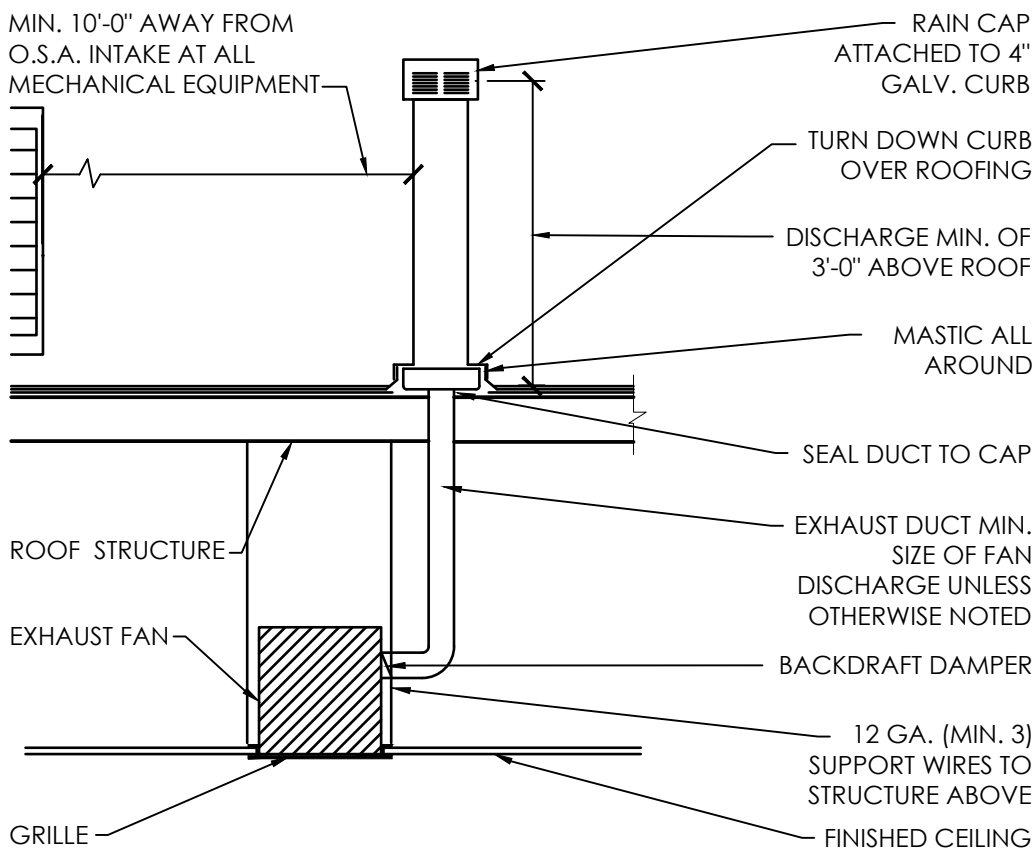


M1 EXHAUST FAN MOUNTING

NOT TO SCALE

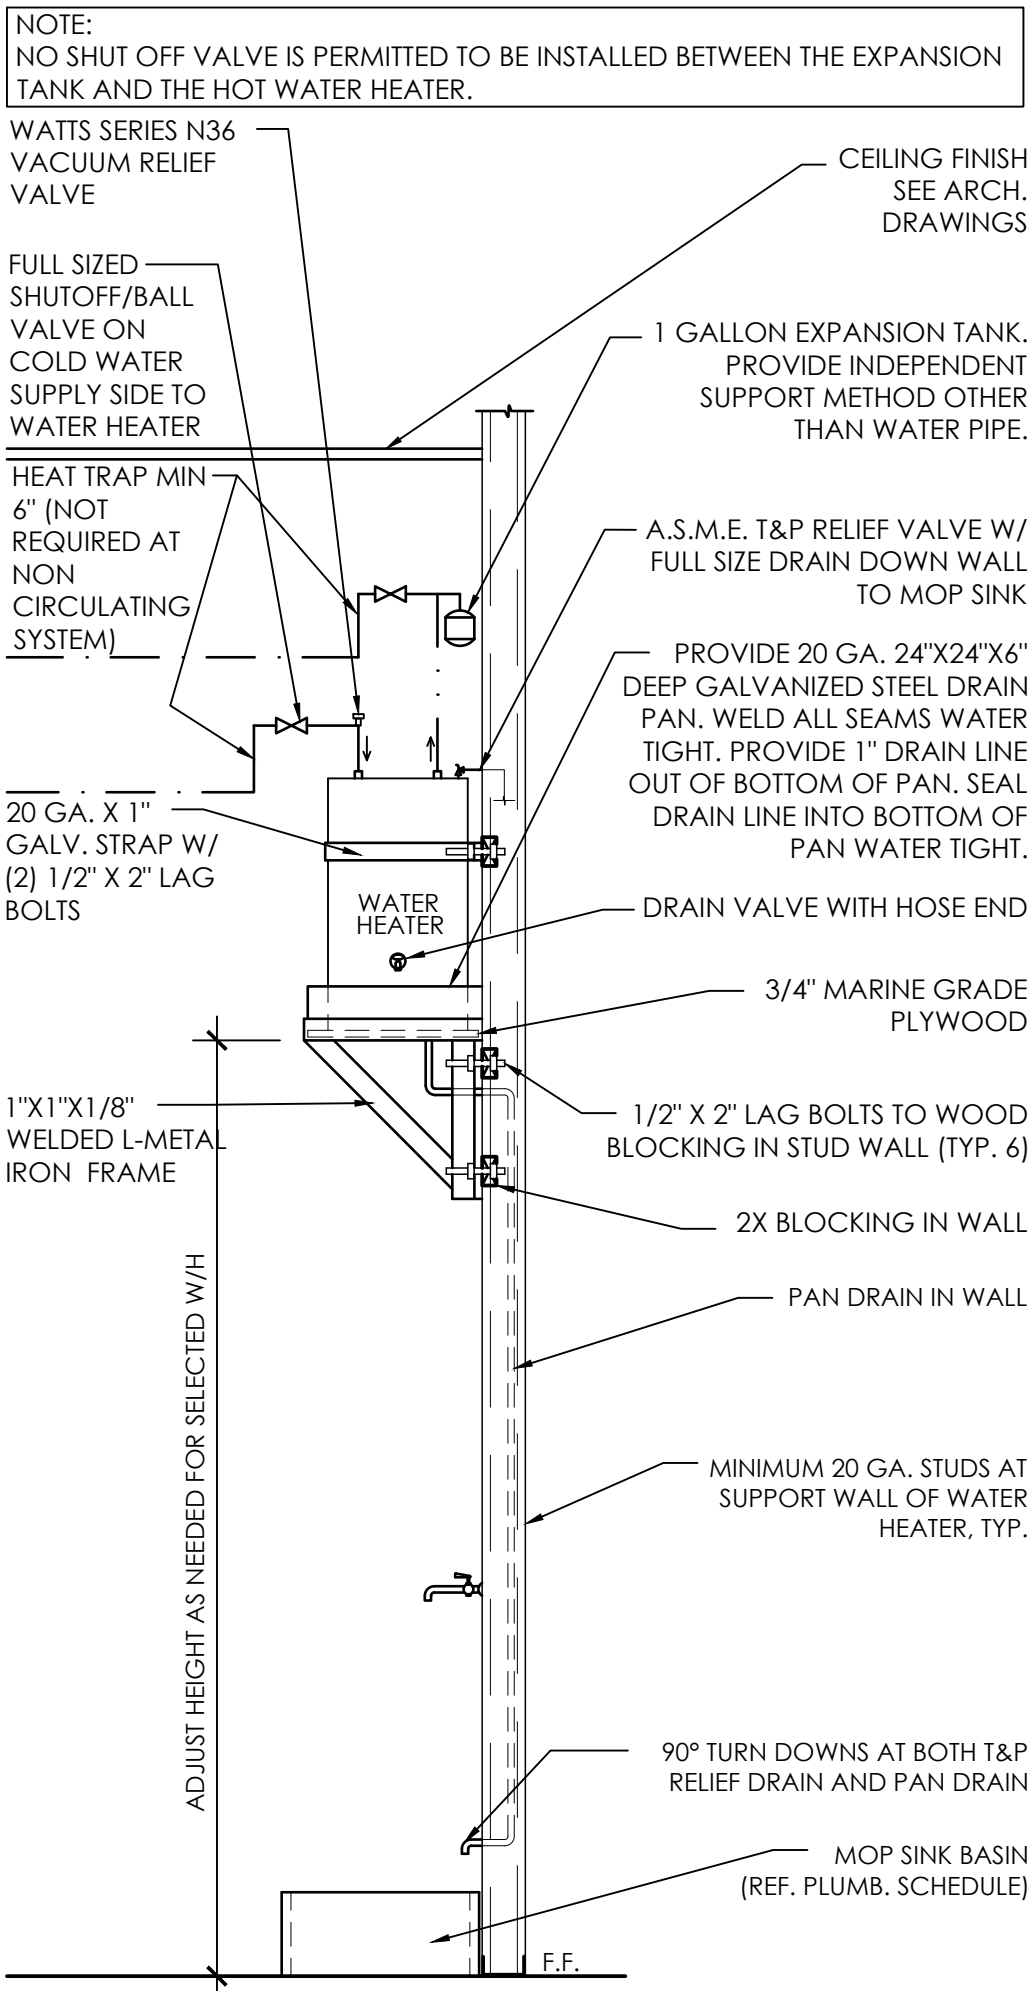


P11 ELECTRIC WATER HEATER

NOT TO SCALE

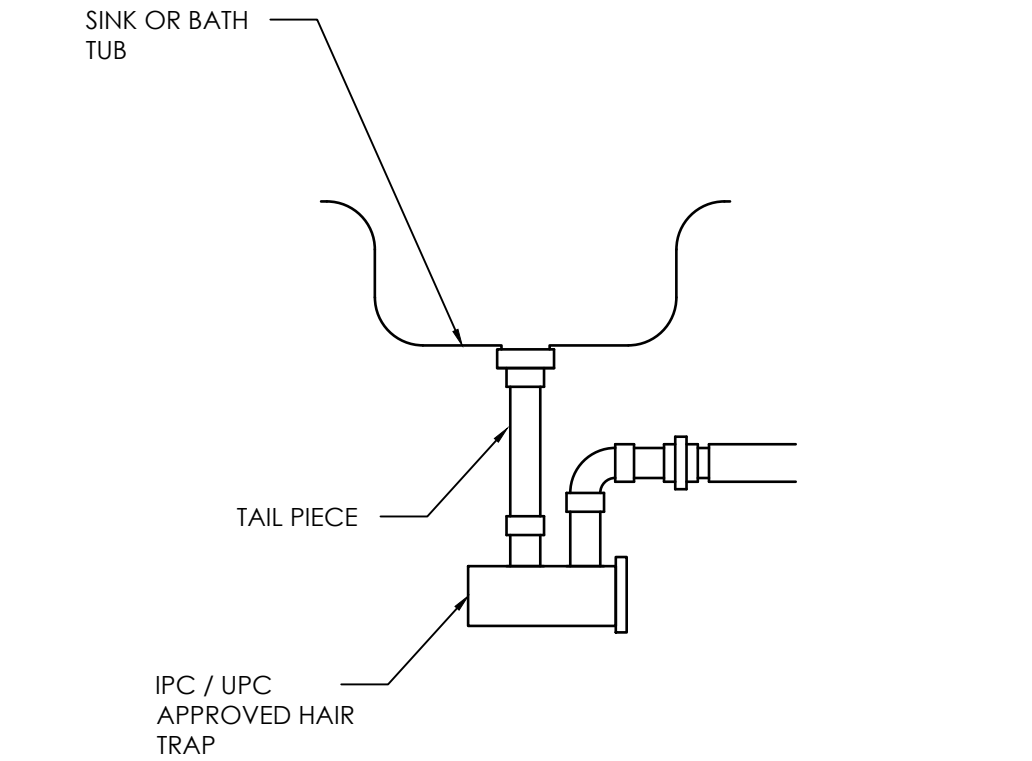

P5 HAIR TRAP DETAIL

NOT TO SCALE

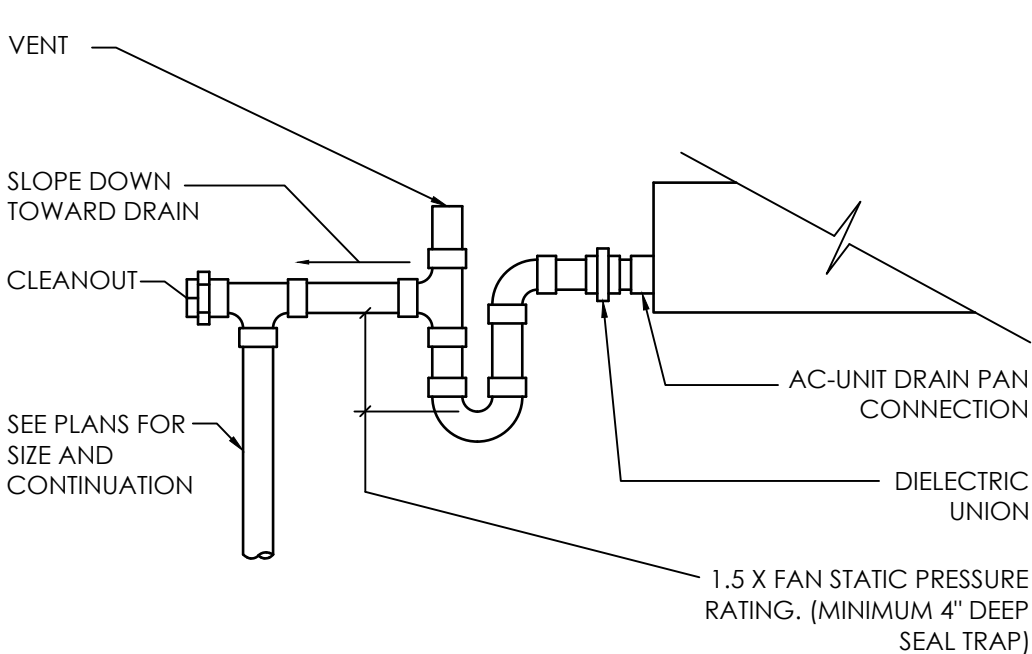


CONDENSATE NOTES:

- ALL CONDENSATE PIPING SHALL BE TYPE "M" COPPER.
- CONDENSATE PIPING SHALL BE INSULATED TO MINIMUM 20' FROM AC-UNIT. (INDOOR PIPING ONLY).
- SEE PLANS FOR PIPE SIZES.


P6 CONDENSATE AT A/C UNIT

NOT TO SCALE

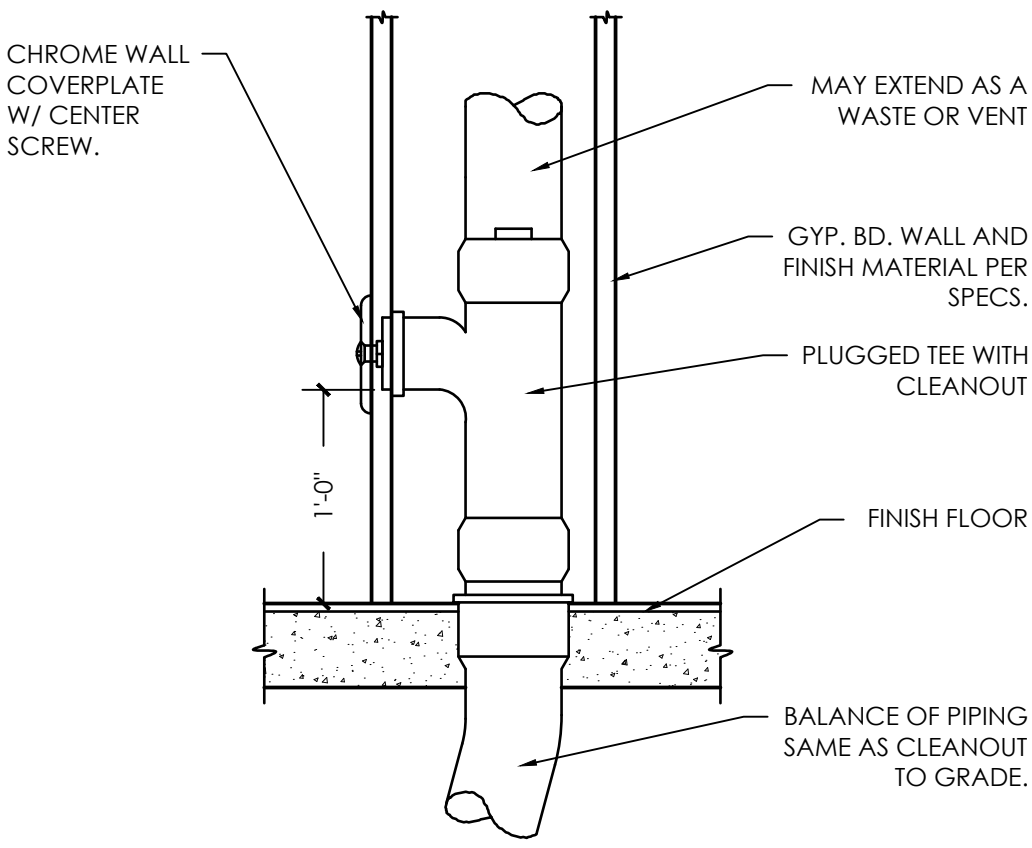


P7 WALL CLEAN OUT (WCO)

NOT TO SCALE

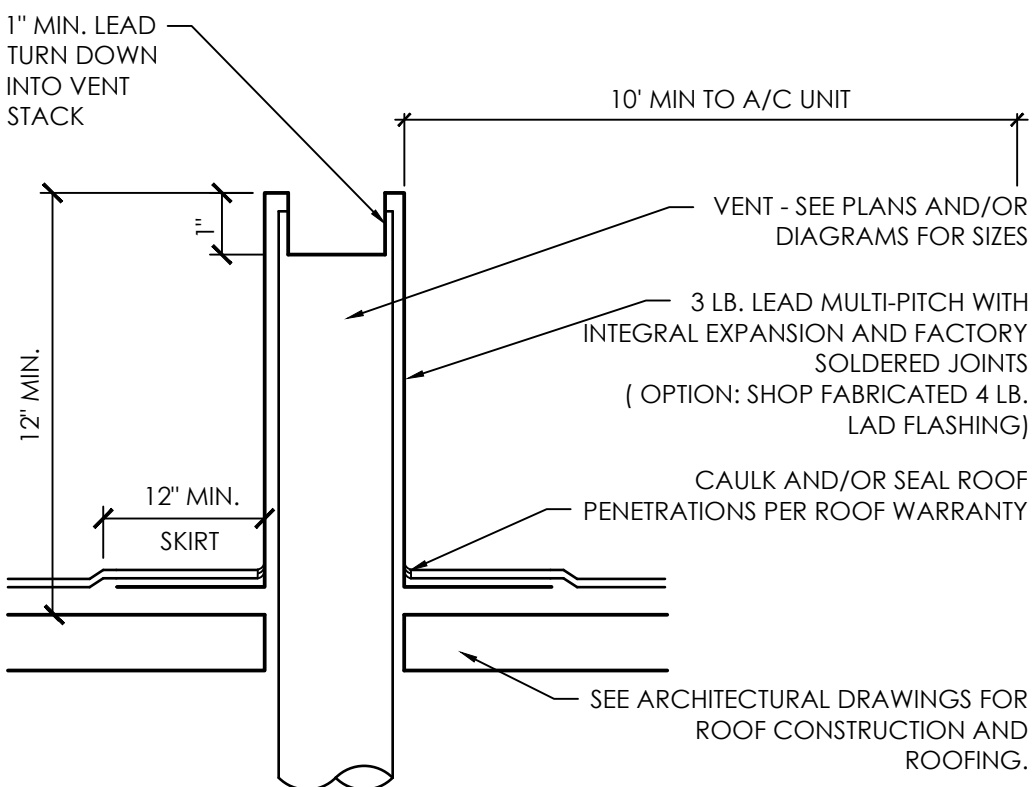

P8 VENT FLASHING


NOT TO SCALE

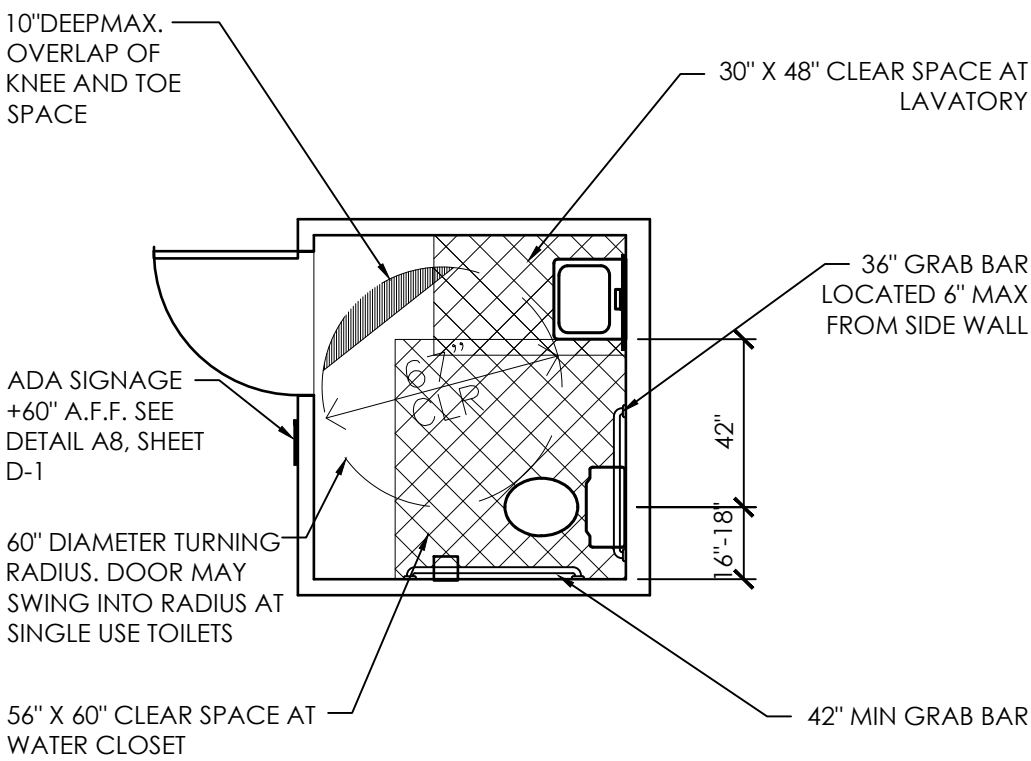

P1 SINGLE USE TOILET ROOM (PER 2021 IBC)

NOT TO SCALE


2017 ICC / ANSI 117.1 -ADA

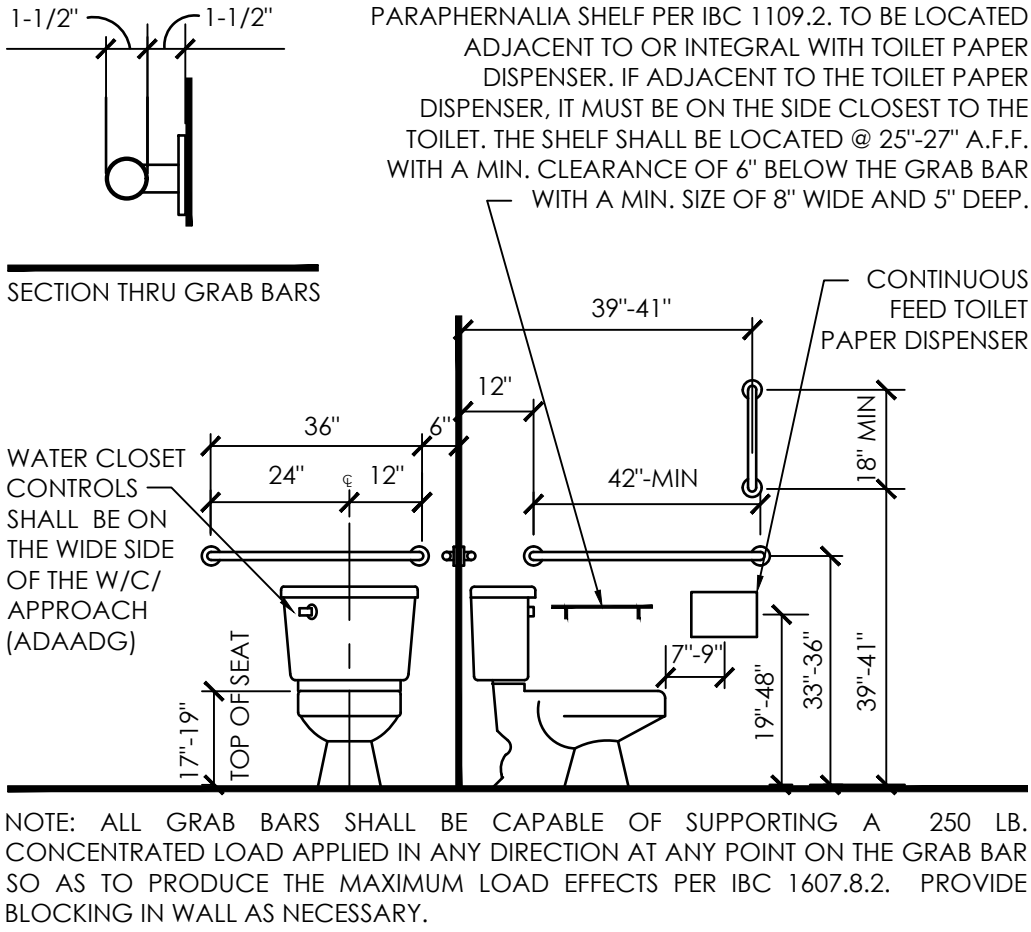

P2 WATER CLOSETS / GRAB BARS

3/8"=1'-0"



2017 ICC / ANSI 117.1 -ADA

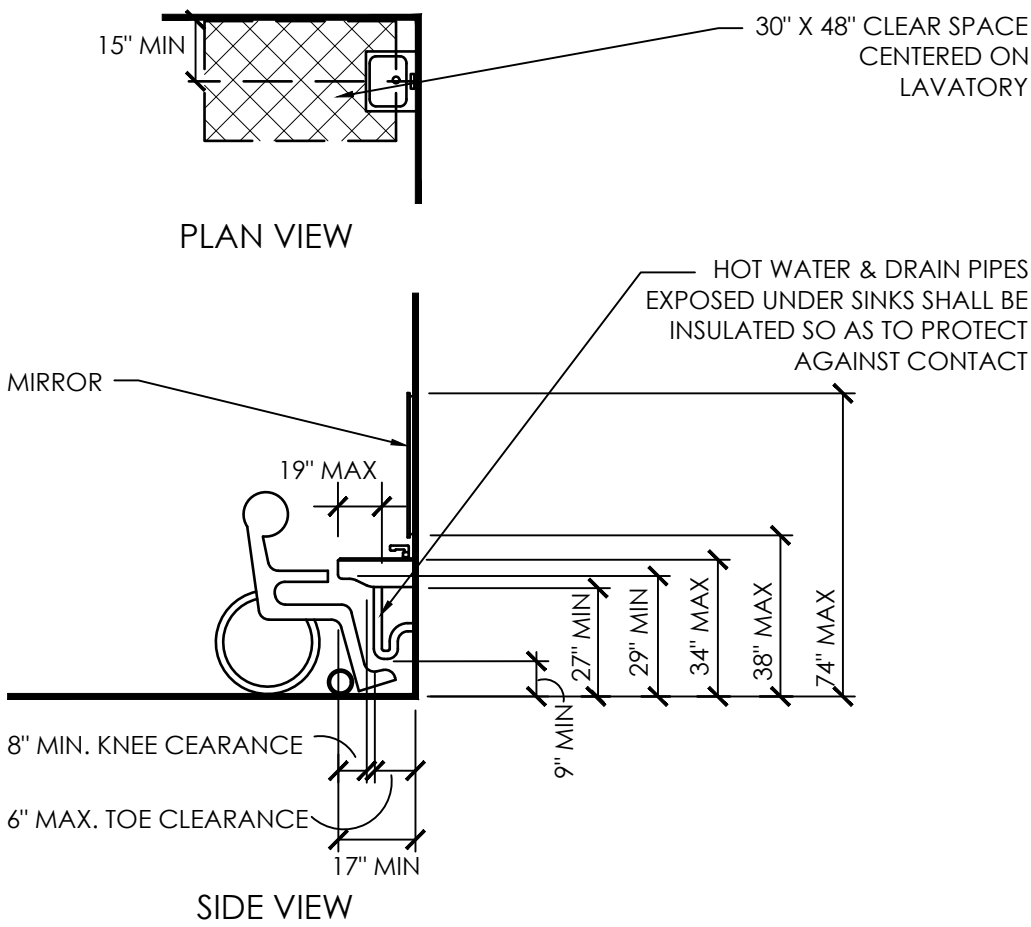

P3 CLEARANCES @ LAVATORIES

1/4"=1'-0"

2017 ICC / ANSI 117.1 -ADA

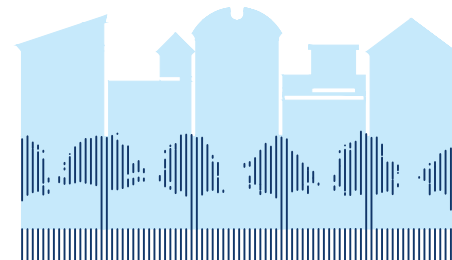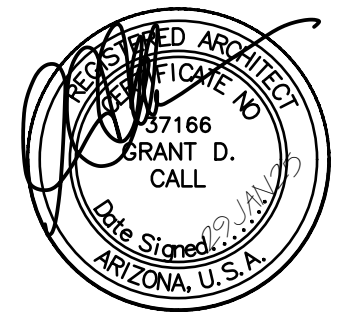

CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net

DRAFTER: GO, DJ, GD, JR

REVISIONS:

- 1
- 2
- 3
- 4
- 5

SPARKLE DOG
CARE

3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025

CS-1140


D-2

MECH. & PLUMB.
DETAILS

MECHANICAL EQUIPMENT SCHEDULE

	MANUFACTURER & MODEL #	TONS	CFM	C. BTU/HR	H. BTU/HR	VOLT.	PHASE	FLA	WEIGHT	SEER	EER	REMARKS	NOTES
AC-1	CARRIER WEATHERMASTER - 50HCQ05	4	1600	41,020	35,180	208V	3	21.5	735 lbs.	15.8		-	1,2
EF-1	BROAN - #688	-	50			120V	1	0.9	-			WITH 3" DUCT	-

- NOTES:
- EXISTING A/C UNIT.
 - CONTRACTOR SHALL VERIFY IF DEHUMIDIFICATION SYSTEM IS INSTALLED ON EXISTING CARRIER UNITS. IF NOT, CONTRACTOR SHALL PROVIDE AN ALTERNATE BID TO ADD THIS SYSTEM.

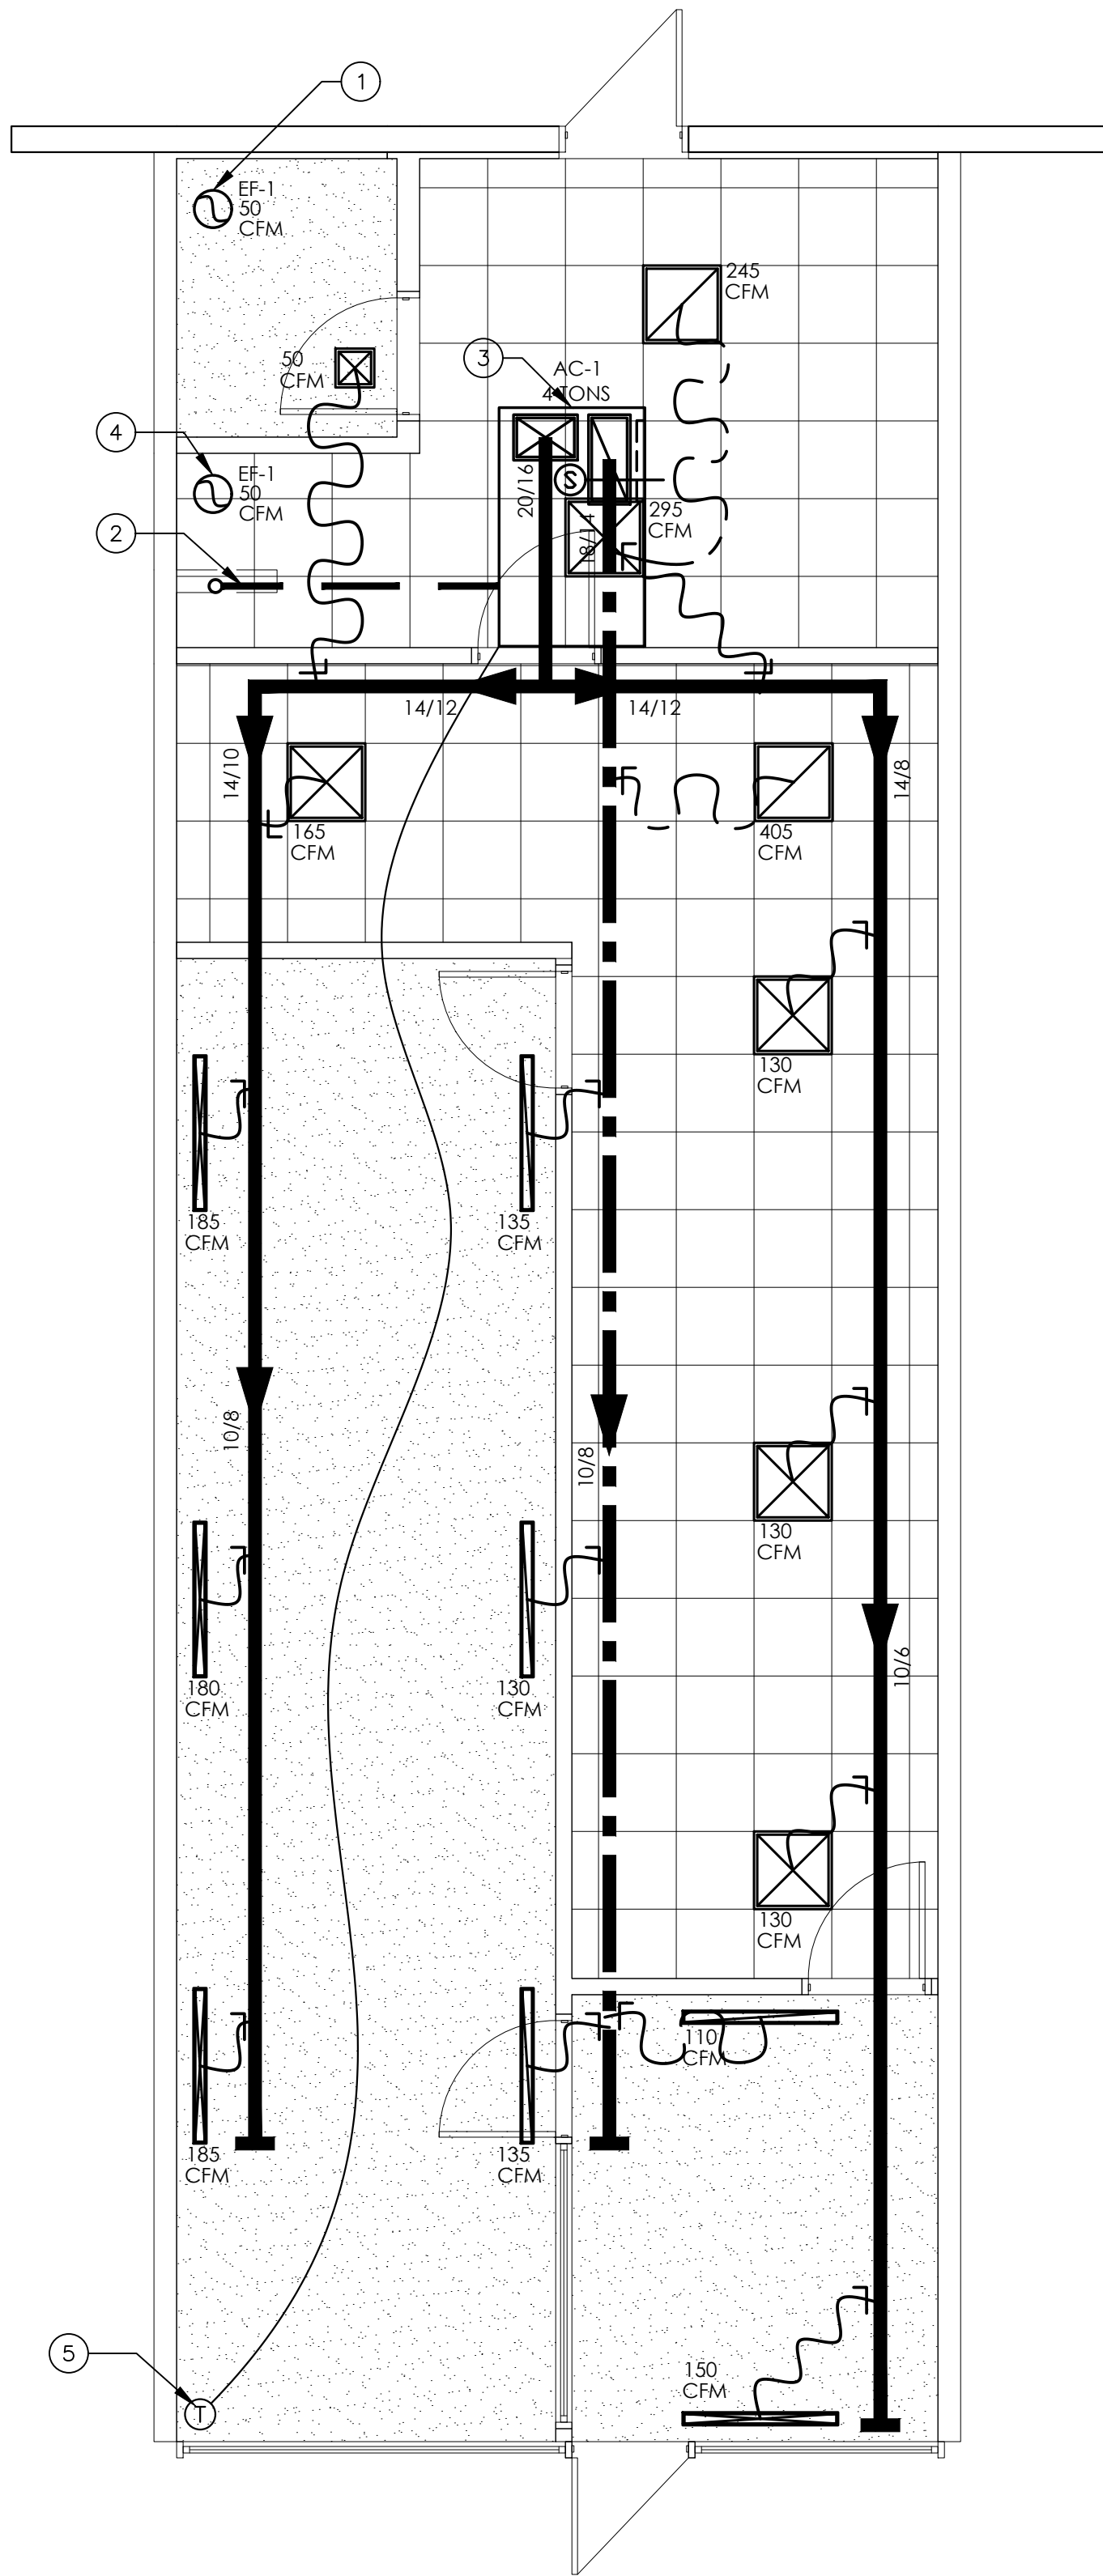

MECHANICAL PLAN KEYNOTES

- EXHAUST FAN W/3" DIA. GALVANIZED EXHAUST DUCT UP THROUGH ROOF TO WEATHER CAP WITH BACKDRAFT LOUVRE. SEE DETAIL M1 / SHEET D-2. EXHAUST FAN TO BE PUT ON A TIMER SWITCH. EXHAUST FAN TO REMAIN ON DURING BUSINESS HOURS.
- 3/4" COPPER CONDENSATE TO "Y" FITTING OF TAIL PIECE OF MOP SINK. SLOPE @ 1/4" /FT MIN. SEE DETAIL P6 /SHEET D2.
- EXISTING 4-TON ROOFTOP A/C UNIT. CONTRACTOR SHALL PROVIDE ALLOWANCE FOR COMFORT BALANCE / RE-BALANCE OF AIR IF NEEDED AFTER OCCUPANCY.
- DRYER EXHAUST VENT, SEE DETAIL M6 / SHEET D-2.
- VERIFY THERMOSTAT PLACEMENT WITH TENANT.

NOTE: CONTRACTOR MAY REUSE EXISTING MAIN TRUNK LINES IF EXISTING SIZING IS COMPATIBLE WITH THIS PLAN.

MECHANICAL SPECIFICATIONS

- HVAC UNITS: SEE SCHEDULE. INSTALL PER MANUFACTURERS INSTRUCTIONS.
- CONDENSATE DRAINS: COPPER. RUN TO AN APPROVED DRAIN. SLOPE AT 1/8" PER FOOT.
- EXHAUST:
 - EXHAUST VENTS MUST TERMINATE 10' HORIZONTALLY FROM OR 3' ABOVE AIR INTAKES, WINDOWS AND VENT SHAFTS.
 - SEE SCHEDULE. INSTALL PER MANUFACTURER'S INSTRUCTIONS.
 - MECHANICAL VENTILATION IN TOILET ROOMS SHALL PROVIDE ONE COMPLETE AIR EXCHANGE EVERY FIFTEEN MINUTES AND SHALL BE VENTED TO THE OUTSIDE OF THE BUILDING.
- DUCTWORK:
 - VERTICAL DROPS: 24 GAUGE GALVANIZED METAL WITH 1/2" DUCT LINER OR 1" FIBERGLASS DUCT BOARD, UL-181, CLASS 1. DUCT TO HAVE MINIMUM R-6 INSULATION AT NON CONDITIONED PLENUM OR ATTIC AREAS.
 - HORIZONTAL DUCTWORK: 1" THICK ALUMINUM FACED FIBER DUCT BOARD, UL-181, CLASS 1. DUCT TO HAVE MINIMUM R-6 INSULATION AT NON CONDITIONED AREAS.
 - DUCTWORK ABOVE THE ROOF: GALVANIZED SHEET METAL. LOCK FORM QUALITY, 1-1/4 oz. ZINC GALVANIZING PER SQUARE FOOT. LINE WITH 1" THICK MANVILLE LINACOUSTIC COATED LINER OR EQUAL. DUCT TO HAVE MINIMUM R-8 INSULATION VALUE.
 - EXHAUST DUCTS: GALVANIZED SHEET METAL, LOCK FORM QUALITY, 1-1/4 oz. ZINC GALVANIZING PER SQUARE FOOT.
 - FLEX DUCT: GENERAL FLEX TYPE, WITH INSULATION, SLR-25,UL181B, CLASS 1.
 - TAKE OFF FITTINGS: TWIST-LOK TYPE DB-1DEL FITTINGS WITH 45° EXTRACTOR AND MANUAL VOLUME CONTROL DAMPER. USE FOR ALL CONNECTIONS OF FLEX DUCT WITH FIBER DUCT BOARD. USE FITTING WITHOUT EXTRACTOR FOR RETURN AIR AND TRANSFER DUCT CONNECTIONS.
 - SUSPEND DUCTWORK FROM STRUCTURE ABOVE. HANGERS TO BE 4'-0" O.C. MAXIMUM.
 - JOINTS: SYSTEM IS A LOW PRESSURE SYSTEM. JOINTS, SEAMS AND CONNECTIONS SHALL BE SECURELY FASTENED AND SEALED WITH WELDS, GASKETS, MASTICS OR TAPES INSTALLED IN ACCORDANCE WITH THE MANUFACTURERS INSTALLATION INSTRUCTIONS. TAPES AND MASTICS TO BE LABELED PER UL181A AND UL181B PER THEIR TYPE, AND BE MARKED ACCORDINGLY.
 - DRYER EXHAUST DUCTS: GALVANIZED SHEET METAL, LOCK FORM QUALITY, MIN 26 GA.
- REGISTERS, GRILLES AND DIFFUSERS: APPROVED SUPPLIERS ARE KRUEGER, J&J, HART & COOLEY, METALAIRE AND CARNES.
- GRAVITY DAMPERS - GRAVITY DAMPERS ARE TO BE INSTALLED ON OUTDOOR AIR SUPPLY DUCTS AND TO EXHAUST DUCTS.
- A SEPARATE THERMOSTAT WILL BE PROVIDED TO OPERATE EACH HVAC UNIT. THERMOSTAT TO BE 7 DAY / 4 PERIOD PROGRAMMABLE, WITH 10 HOUR MEMORY BATTERY BACKUP, WITH MANUAL HEATING/COOLING CHANGEOVER, AND 2 HOUR MANUAL OPERATION OVERRIDE. SETBACK TEMPERATURE TO BE SET BETWEEN 55°F AND 85°F.
- PROVIDE OWNER WITH ALL OPERATING AND MAINTENANCE MANUALS, UNIT SPECIFICATION CUT SHEETS, WIRING DIAGRAMS AND SCHEMATICS TO AC UNITS AND THERMOSTATS. PROVIDE DOCUMENTATION ON THE INTENDED USE OF EACH PIECE OF EQUIPMENT, AND BALANCING REPORT.
- ALL ROOF TOP UNITS SHALL BE A MINIMUM OF 10' FROM ROOFS EDGE.
- SMOKE DETECTORS: EXISTING UNITS DO NOT REQUIRE SMOKE DETECTORS. UNITS ARE UNDER 2000 CFM.

MECHANICAL LEGEND

FLEX DUCT AND NECK SIZES FOR SUPPLY AND RETURN AIR.

0-75 CFM= 6x6 NECK W/ 6"ø FLEX
76-175 CFM= 9x9 NECK W/ 8"ø FLEX
176-200 CFM= 12x12 NECK W/ 8"ø FLEX
201-280 CFM= 12x12 NECK W/ 10"ø FLEX
281-350 CFM= 12x12 NECK W/ 12"ø FLEX
351-425 CFM= 15x15 NECK W/ 12"ø FLEX
426-500 CFM= 15x15 NECK W/ 14"ø FLEX
501-560 CFM= 18x18 NECK W/ 14"ø FLEX

- SUPPLY AIR REGISTER
- RETURN AIR GRILLE WITH FILTER IN GRILLE
- FLEX DUCT WITH VOLUME CONTROL DAMPER
- DUCT SIZE INDICATOR
- CHANGE IN DUCT SIZE
- SUPPLY DUCT
- RETURN DUCT
- EXHAUST FAN, SEE DETAIL M-1 SHEET D-2
- PROGRAMMABLE THERMOSTAT MOUNTED BETWEEN 48"-54" A.F.F.
- CONDENSATION LINE DOWN TO WASTE LINE OR MOP SINK SEE P6 / D-2
- MECHANICAL UNIT. SEE MECHANICAL EQUIPMENT SCHEDULE FOR UNIT INFORMATION AND WEIGHT.

OUTSIDE AIR REQUIREMENTS


OCCUPANT LOAD: PER 2018 IMC TABLE 403.3 AND SECTION 403

A/C UNIT #1	AREA:	1,210 SF	SIZE:	4 TON
BREATHING ZONES	4	EQUATION 4.1		EQUATION 4.2
		Rp X	Pz +	Ro X Az = Vbz /Ez =Voz
OFFICE AREA	5	1.1	0.06	211 18 1 18
WAITING ROOM	5	3.5	0.06	115 24 1 24
OPERATORY	15	16.7	0.12	836 351 1 351
PUBLIC TOILET FIXTURES		EA. FIX. @	50	1 50
TOTAL				443

MULTIPLE BREATHING ZONES PER UNIT
USE EQUATION 4.7 D= 1 21.2 (Pz ALL ZONES)/ 21.2 (Pz ALL ZONES)
USE EQUATION 4.6 Vou= D X Vbz (SUM ALL ZONES)
Vou= 1 X 443 CFM USE: 440 CFM

GENERAL NOTES

- SEE MECHANICAL SPECIFICATIONS THIS SHEET FOR IMPORTANT INFORMATION RELATING TO BUILDING CODES, CITY ORDINANCES, MATERIALS AND METHODS.
- ROOF PENETRATIONS AND ROOF WORK TO BE PERFORMED BY LANDLORD'S CONTRACTOR IF REQUIRED, VERIFY WITH LANDLORD.
- ROOMS THAT ARE SHOWN WITHOUT RETURN AIR REGISTER OR A TRANSFER GRILL, SHALL HAVE AN UNDERCUT DOOR BY 1" FOR RETURN A/C BALANCE.
- INTERLOCK SMOKE DETECTORS WITH AIR HANDLER UNITS. ACTIVATION OF SMOKE DETECTOR SHALL SHUT DOWN AIR HANDLERS SERVING THE SUITE.
- VERIFY THERMOSTAT AND DIFFUSER LOCATION WITH CLIENT/CONTRACTOR PRIOR TO PLACEMENT. CONTROL SHALL BE A MAXIMUM OF 48" A.F.F.
- SPIRAL DUCTWORK IS ALLOWED TO BE USED IN LIEU OF RECTANGULAR DUCTWORK. THE SIZING OF SPIRAL DUCTWORK SHALL BE THE RESPONSIBILITY OF THE MECHANICAL CONTRACTOR BUT SHALL IN NO WAY CHANGE THE VELOCITY OR VOLUME OF THE AIR PASSING THE THROUGH THE DUCTWORK.

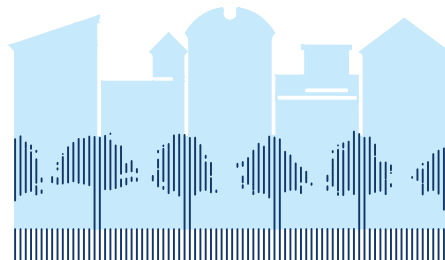

CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net
DRAFTER: GO, DJ, GD, JR

REVISIONS:

-
-
-
-
-

SPARKLE DOG
CARE


3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025

CS-1140

M-1

MECHANICAL
PLAN

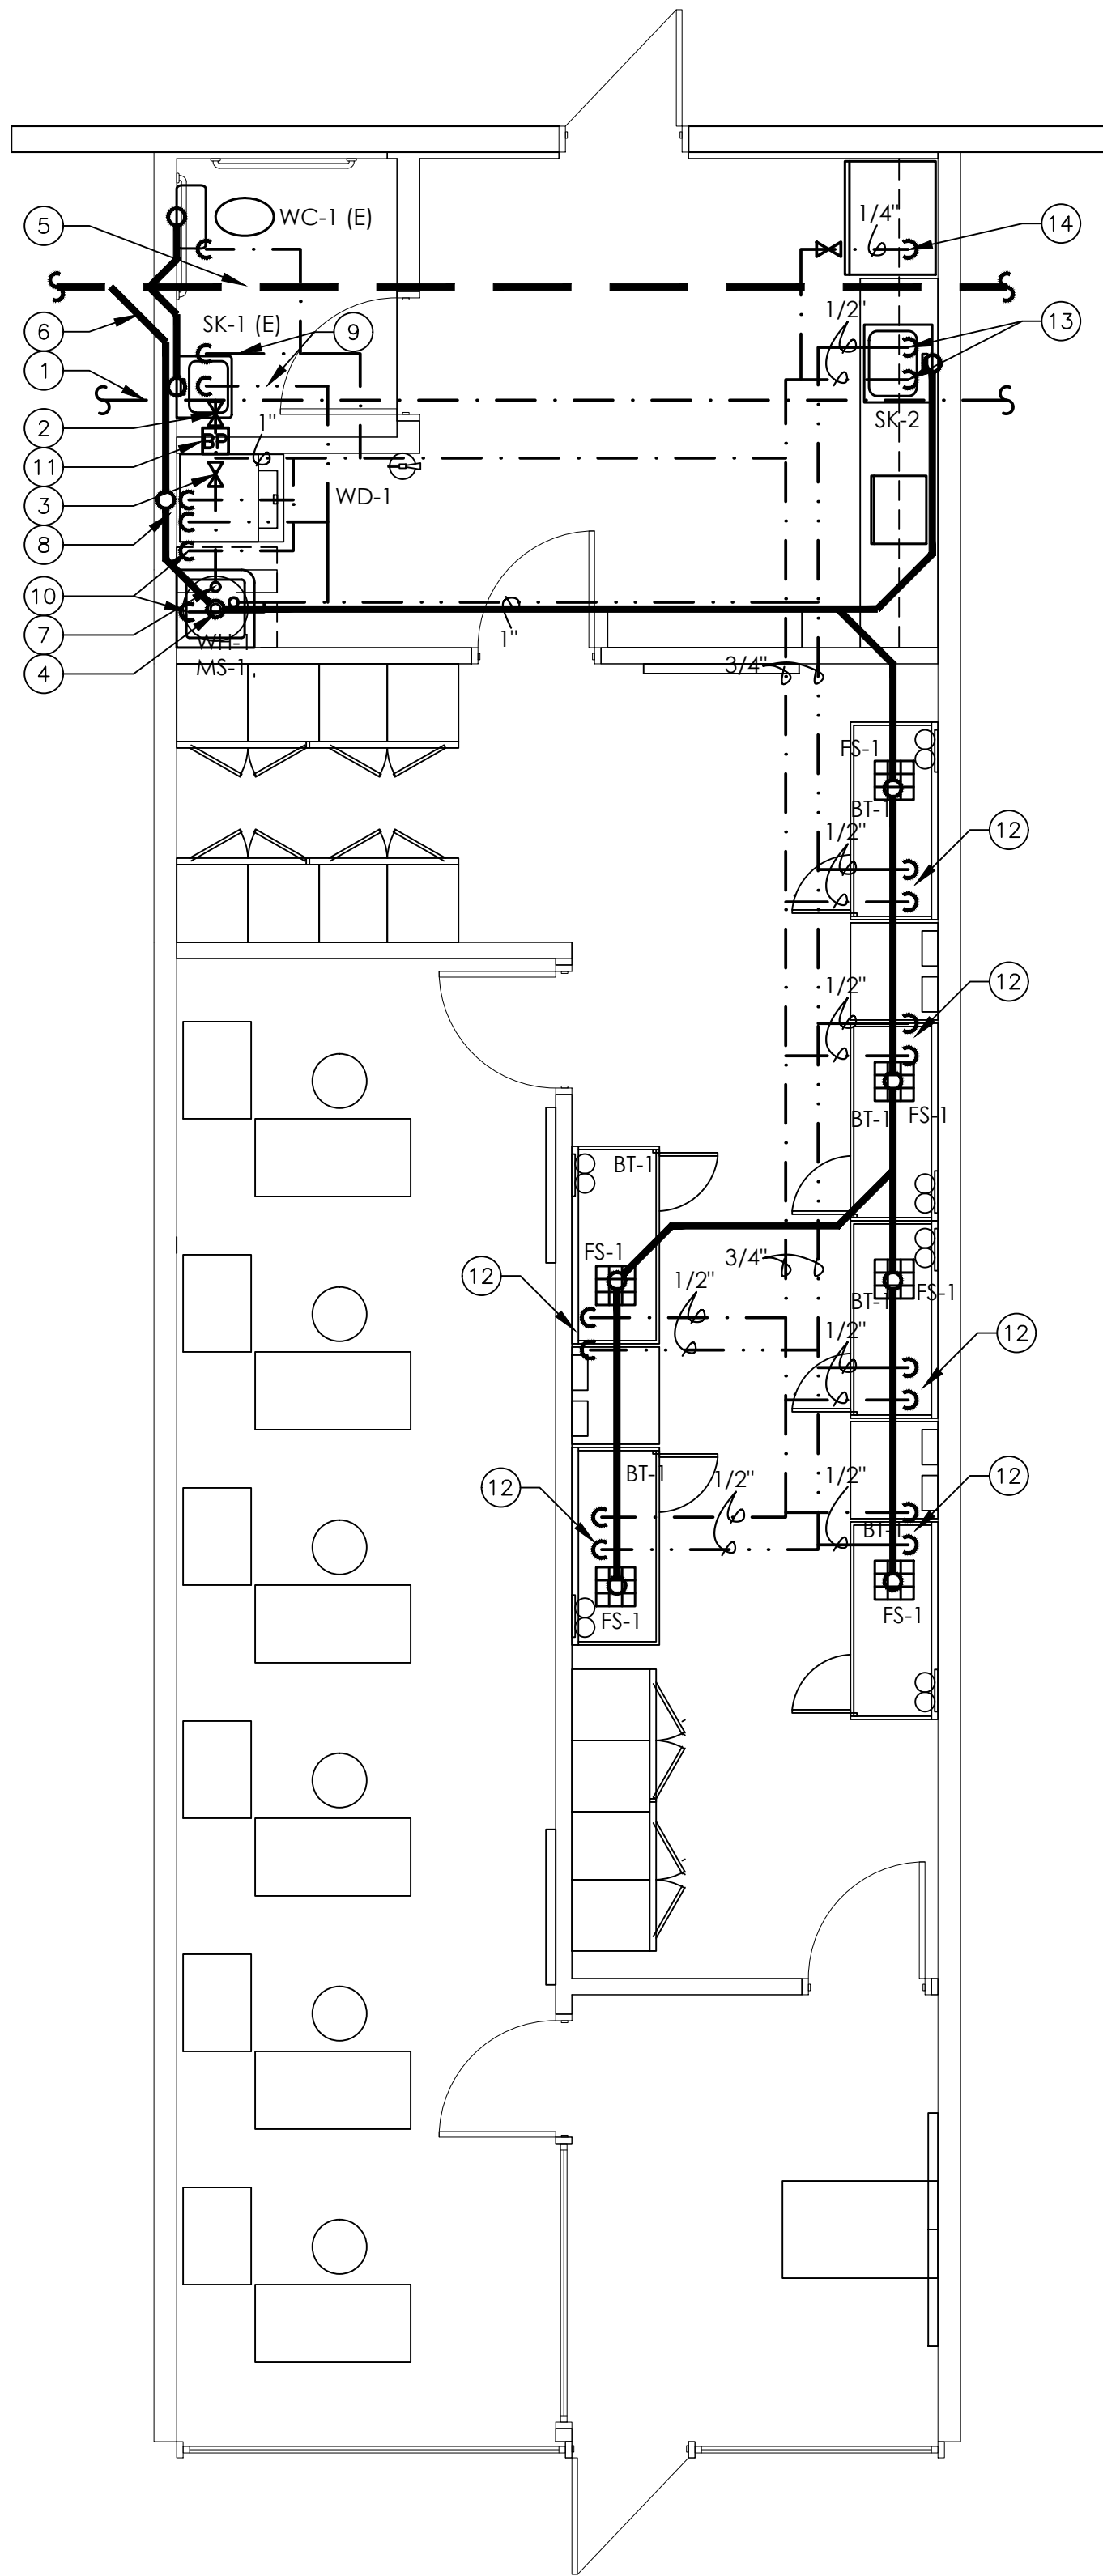


PLUMBING PLAN KEYNOTES

- EXISTING 1-1/4" COLD WATER LINE SERVICE TO BUILDING (VERIFY EXACT LOCATION).
- EXISTING 1-1/4" SHUT OFF VALVE ABOVE CEILING (VERIFY LOCATION). CONTRACTOR TO INSTALL A REMOTE CONTROL SOLENOID SHUTOFF VALVE AT THIS LOCATION. SEE SHEET E-1 FOR CONTROL LOCATION.
- 1" HOT WATER SHUT OFF VALVE.
- PROVIDE 30 GAL. HOT WATER HEATER. PROVIDE 4" DEEP GALVANIZED DRIP PAN W/ 3/4" T&P DRAIN WITH AIR GAP TO MOP SINK. WATER HEATER TO BE SET AT MAX 120°. SEE DETAIL P11 / D-2.
- EXISTING 4" Ø SEWER. VERIFY EXACT LOCATION PRIOR TO SAW CUTTING.
- TIE INTO EXISTING SEWER LINE.
- "Sure Seal" WATERLESS TRAP PRIMER AT ALL FLOOR DRAINS & FLOOR SINKS. TICC-ES LISTED: PMG-1070 ASSE 1072 APPROVED LISTING #1409 IAPMO LISTED: C-4165
- WASHER BOX RECESSED IN WALL @ 42" A.F.F. FOR CLOTHES WASHER UNIT. VERIFY EXACT LOCATION WITH EQUIPMENT SPECIFICATIONS. FINAL CONNECTION TO BE MADE BY CONTRACTOR. PROVIDE DRYER EXHAUST VENT DUCT. SEE DETAIL M6 / D-2.
- EXTEND 3/4" COLD WATER AND 1/2" HOT WATER DOWN WALL TO SERVE LAVATORY. EXTEND 1/2" COLD WATER THROUGH WALL TO SERVE WATER CLOSET.
- EXTEND 3/4" HOT AND COLD WATER DOWN WALL TO SERVE MOP/UTILITY SINK.
- PROVIDE SECONDARY BACKFLOW DEVICE AT THIS LOCATION. IN EXSTING WATER PIPE SERVING THIS SUITE CONTRACTOR SHALL PROVIDE PIPE DOWN WALL AND INSTALL SECONDARY BACKFLOW PREVENTER AT 4' A.F.F. BEFORE PIPE CONTINUES ON.
- DOG WASH STATION, PROVIDED BY TENANT. EXTEND 1/2" COLD WATER AND 1/2" HOT WATER LINES TO EACH STATION. PROVIDE INDIRECT WASTE LINE TO FLOOR SINK WITH HAIR TRAP - SEE DETAIL P5/D-2.
- EXTEND 1/2" COLD WATER AND 1/2" HOT WATER DOWN WALL TO SERVE BREAK ROOM SINK.
- PROVIDE 1/4" LINE AND SHUT OFF VALVE TO REFRIGERATOR OFF OF 1/2" LINE TO SINK.

PLUMBING SPECIFICATIONS

- ALL WATER FIXTURES SHALL HAVE HOT AND/OR COLD SHUT OFF VALVES.
- INSULATE ALL HOT WATER SUPPLY AND RETURN PIPING PER IECC C404.5. ALL HOT WATER PIPE SHALL BE INSULATED WITH NOT LESS THAN 1" OF INSULATION HAVING A CONDUCTIVITY NOT EXCEEDING 0.27 BTU PER IN/H·FT X F. THE FIRST 8' OF PIPE IN NON-HOT-WATER-SUPPLY TEMPERATURE MAINTENANCE SYSTEMS SERVED BY EQUIPMENT WITHOUT INTEGRAL HEAT TRAPS SHALL BE INSULATED WITH 1/2" MATERIAL HAVING A CONDUCTIVITY NOT EXCEEDING 0.27 BTU PER IN/H·FT X F.
- PLUMBING FIXTURES SHALL HAVE THE FOLLOWING MAXIMUM FLOW RATES.
 - WATER CLOSETS: 1.6 GALLONS PER FLUSHING CYCLE
 - LAVATORIES: 0.5 GALLONS PER MINUTE AT 60 PSI
 - SINKS: 2.2 GALLONS PER MINUTE AT 60 PSI
 - URINALS: 1.0 GALLON PER FLUSHING CYCLE
 - SHOWER HEAD: 2.5 GALLONS PER MINUTE AT 80 PSI
- SLOPE ALL SEWER LINES AS FOLLOWS:
 - 4" AND LARGER: 1%
 - 3" AND SMALLER: 2%
- EACH CLEAN OUT SHALL BE READILY ACCESSIBLE AND LOCATED AS TO SERVE ITS PURPOSE.
- ALL SURFACE CLEAN OUTS SHALL EXTEND TO FINISH GRADE.
- ALL FLOOR DRAINS / FLOOR SINKS SHALL HAVE TRAP PRIMERS.
- VENTS MUST TERMINATE 10 HORIZONTALLY FROM OR 3 FEET ABOVE AIR INTAKES, WINDOWS AND VENT SHAFTS
- PIPING REQUIREMENTS:
 - POTABLE WATER: TYPE L HARD DRAWN COPPER, PEX OR CPVC FOR ALL ABOVE SLAB USES. TYPE K SOFT DRAWN COPPER, PEX OR CPVC FOR ALL IN-SLAB AND UNDERGROUND USES. NO JOINTS OR FITTINGS ARE PERMITTED IN-SLAB OR UNDERGROUND.
 - WASTE AND VENT: CAST IRON ABOVE GROUND AND ABS BELOW SLAB IN TYPE III-A. 1 HOUR OR TYPE V-A. 1 HOUR CONSTRUCTION. SEE "PROJECT INFORMATION" ON SHEET A-1 FOR CONSTRUCTION TYPE.
 - WASTE AND VENT: ABS OR PVC IN TYPE III-B OR TYPE V-B CONSTRUCTION. SEE "PROJECT INFORMATION" ON SHEET A-1 FOR CONSTRUCTION TYPE.
- ALL ROUGH-IN LOCATIONS SHOWN ARE APPROXIMATE. FINAL AND ACCURATE LOCATION IS THE RESPONSIBILITY OF THE CONTRACTOR. COORDINATE WITH ALL ACCESSIBILITY ISSUES.
- CONTRACTOR IS RESPONSIBLE FOR ALL ROUGH-IN AND FINAL CONNECTION OF ALL PLUMBING FIXTURES UNLESS NOTED OTHERWISE ON THE PLANS.
- INSTALL ALL FAUCETS, DRAINS AND SIMILAR ITEMS FURNISHED BY THE EQUIPMENT SUPPLIERS REQUIRED FOR ALL EQUIPMENT TO FUNCTION PROPERLY.\
- PROVIDE WATER HAMMER ARRESTOR WATTS SS-C WHERE QUICK CLOSING VALVES ARE UTILIZED. INSTALL PER MANUFACTURER'S WRITTEN SPECIFICATIONS
- SERVICE WATER HEATER SHALL SHOW COMPLIANCE WITH IECC C404.2 "MINIMUM EFFICIENCY"; IECC C404.3 "TEMPERATURE CONTROLS"; IECC 404.4 "HEAT TRAPS"; IECC 404.5 "PIPE INSULATION"; AND IECC 404.6 "MANUAL OR AUTOMATIC SHUT-OFF OF CIRCULATING SYSTEM WHEN NOT IN USE".
- ANY PIPE PENETRATIONS THROUGH RATED WALLS AND FLOORS SHALL BE SEALED WITH A MATERIAL CAPABLE OF PREVENTING THE PASSING OF FLAMES AND HOT GASES. ALL MATERIALS TO BE APPROVED OR LISTED. IPC 315.1.
- WATER PIPING INSTALLED MINIMUM OF 12" ABOVE SEWER AT CROSSING IPC 603.2.
- TEST ALL SEWER, WATER, AND GAS PIPING PRIOR TO BACKFILL AND COVER. CALL FOR INSPECTION AND WITNESS TESTING PRIOR TO CONCEALING WATER, SEWER, GAS PIPING. IPC 107.2.
- FLUSH AND DISINFECT ALL POTABLE WATER PIPING PRIOR TO OCCUPANCY. IPC 610.
- PROVIDE TEMPERATURE MIXING VALVE AT PUBLIC LAVATORY PER IPC 419.5. SEE PLUMBING FIXTURE SCHEDULE ON THIS SHEET.

PLUMBING LEGEND

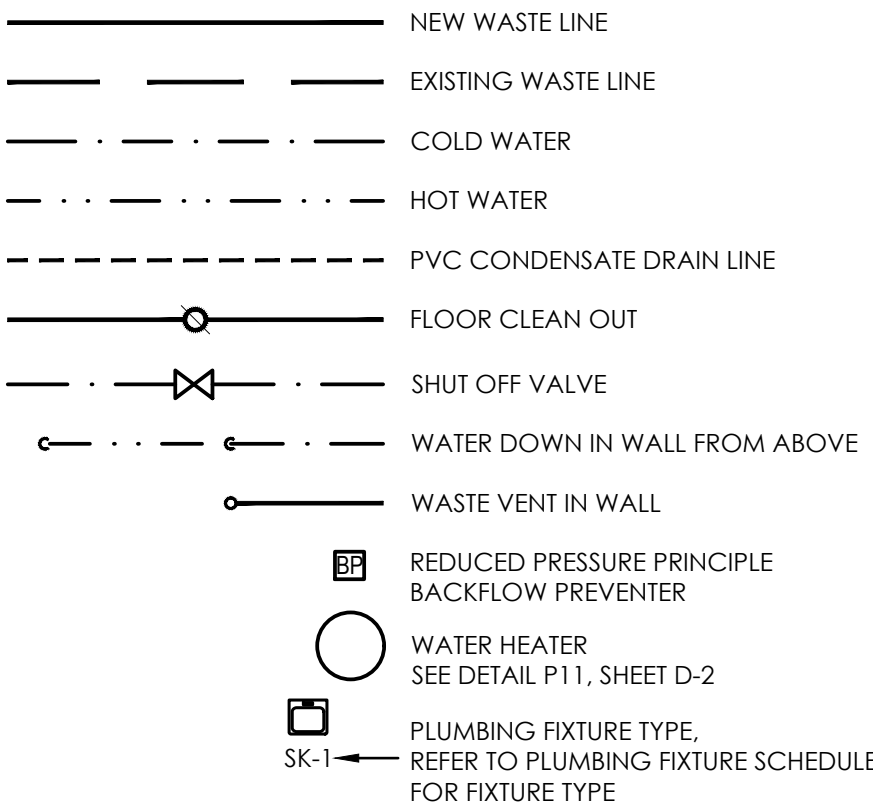

FIXTURE UNIT COUNT

FIXTURE	F.U. EACH		F.U. TOTAL	
	QUAN.	WATER	WASTE	WASTE
MOP SINK	1	3	3	3
SERVICE SINK	6	3	3	18
LAVATORY	1	1	1	1
SINK	1	2	2	2
TOILET (FLUSH TANK)	1	2.5	6	2.5
CLOTHES WASHER	1	4	3	4
TOTAL UNITS THIS PROJECT				30.5
TOTAL EXISTING UNITS (REST OF BUILDING)				0
TOTAL UNITS				30.5

WATER CALCULATIONS

DESIGN DATA	
APPROXIMATE STREET WATER PRESSURE	= 65 PSI
EXISTING WATER METER SIZE	2"
EXISTING BACK FLOW PREVENTER	2"
EXISTING WATER LINE PROVIDED	2"
TOTAL FIXTURE UNITS	= 30.5 FU
TOTAL GALLONS PER MINUTE	= 20 GPM

PIPE LENGTH	
HORIZONTAL PIPE LENGTH (TAP TO LAST FIXTURE)	120 FT
VERTICAL PIPE RISE (TAP TO HIGHEST FIXTURE)	15 FT
TOTAL PIPE LENGTH	135 FT
FITTING ALLOWANCE (TOTAL PIPE LENGTH X 0.25)	33.8 FT
TOTAL PIPE LENGTH	169 FT

PRESSURE LOSSES	
WATER METER PSI LOSS	5 PSI
BACKFLOW PREVENTER	15 PSI
VERTICAL RISE PSI LOSS (VERTICAL RISE X 0.43)	6.45 PSI
FIXTURE PSI LOSS	8 PSI


	STREET PRESSURE	65 PSI
	LESS TOTAL LOSSES	34.5 PSI
	PSI DIFFERENCE	30.6 PSI

PSI DROP PER 100'	
	31 X 100 FT/ 168.8 = 18.1 PSI
WATER LINE REQUIRED	= 1"
WATER LINE PROVIDED	= 1-1/4"

ALL PIPES SIZED PER TABLE E201.1 IPC

GENERAL NOTES

- WASTE AND VENT PIPE SIZES. SEE SHEET P-2.
- SEE PLUMBING SPECIFICATIONS THIS SHEET FOR IMPORTANT INFORMATION RELATING TO BUILDING CODES, CITY ORDINANCES, MATERIALS AND METHODS.
- VERIFY LOCATION OF ALL STUB OUTS AND ROUGH-INS FOR ALL FIXTURES WITH CONTRACTOR AND CLIENT. NO CONSIDERATION WILL BE GIVEN TO ITEM INSTALLED BUT NOT APPROVED.
- CLIENT APPROVED CABINET DRAWINGS TAKE PRECEDENCE FOR ALL PLACEMENT OF PLUMBING OR ELECTRICAL. ALL PLUMBING AND/OR ELECTRICAL PLACEMENT TO BE VERIFIED WITH GENERAL CONTRACTOR PRIOR TO INSTALLATION.

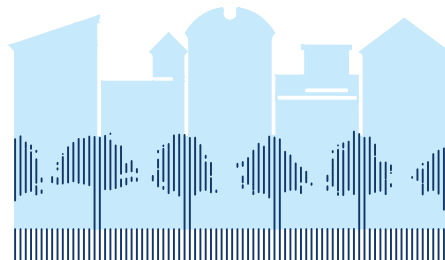

CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net

DRAFTER: GO, DJ, GD, JR

REVISIONS:

- 1
- 2
- 3
- 4
- 5

SPARKLE DOG
CARE

3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025

CS-1140


P-1

PLUMBING PLAN

PLUMBING FIXTURE SCHEDULE


#	DESCRIPTION	MANUFACTR & MODEL #	FITTING & CAPACITY	ACCESSORIES & REMARKS	NOTES	CW	HW	WASTE	VENT
WC-1	WATER CLOSET (ADA ACCESSIBLE) FLUSH TANK	TOTO DRAKE CST744SL COLOR: WHITE, COTTON OR BONE	1.28 GPF -	ELONGATED BOWL SPLIT FRONT SEAT	-	1/2"	-	3"	2"
SK-1	WALL HUNG LAVATORY (ADA ACCESSIBLE)OFF SET SINK	SCARABEO 5149 COLOR: WHITE	TERRA TOUCHLESS AUTOMATIC FAUCET (AVAILABLE ON AMAZON)	CW1Q#ROVATE#NVH712 (AVAILABLE ON AMAZON)	1	1/2"	1/2"	2"	1.5"
SK-2	STAINLESS STEEL LARGE BASIN SINK	KOHLER STACCATO K-3362-1; 27"X22"	9159-AR-DST TRINSIC	WITH STRAINER AND DRAIN WITH MAGNETIC STAINLESS W/ SPRAY	1	1/2"	1/2"	2"	1.5"
FS-1	FLOOR SINK PVC	ZURN #FD-2370-PV3" [ALTERNATE PV2" OR PV4" DRAIN]	- -	"Sure Seal" WATERLESS TRAP PRIMER AND BACKWATER VALVE	2	-	-	3"	1.5"
WH-1	ELECTRIC WATER HEATER -	RHEEM #ELD120-FTB #EGSP10	120 GAL., 50.4A, 1 PH 208V	EXPANSION TANK WATTS MODEL #DET-5-M1	-	-	-	-	-
MS-1	MOP SINK 24" x 24" x 10"	FIAT - CRANE #MSB-2424	CRANE #830AA -	DRAIN - CRANE #1453-BB THREADED SPOUT W/ VAC BREAKER	-	1/2"	1/2"	2"	1.5"
WD-1	CLOTHES WASHER & DRYER ELECTRIC, 27"W x 30"D x 76"H	GE UNITIZED SPACEMAKER #GUD27ESSJWW	208V, 1 PH(2 POLE) 27.6 AMPS	4"Ø VENT -	-	1/2"	1/2"	2"	1.5"
BT-1	DOG BATH PROVIDED BY CLIENT, INSTALLED BY GC	PROVIDED BY CLIENT INSTALL BY GC	- -	- -	3	1/2"	1/2"	-	-

NOTES:
1. PROVIDE MIXING VALVE FOR PUBLIC-USE LAVATORY TO LIMIT HOT WATER TO A MAXIMUM OF 110°F. USE MIXING VALVE SYMMONS #4-10B OR EQUAL(MUST CONFORM TO ASSE 1070- SECTIONS 416.5 & 607.1.2, IPC 2018). INSTALL PER MANUFACTURERS INSTALLATION SPECIFICATIONS.
2. 1/2" GRATE.
3. INDIRECT WASTE TO FLOOR SINK BELOW. PROVIDE HAIR TRAP @ FLOOR SINK.

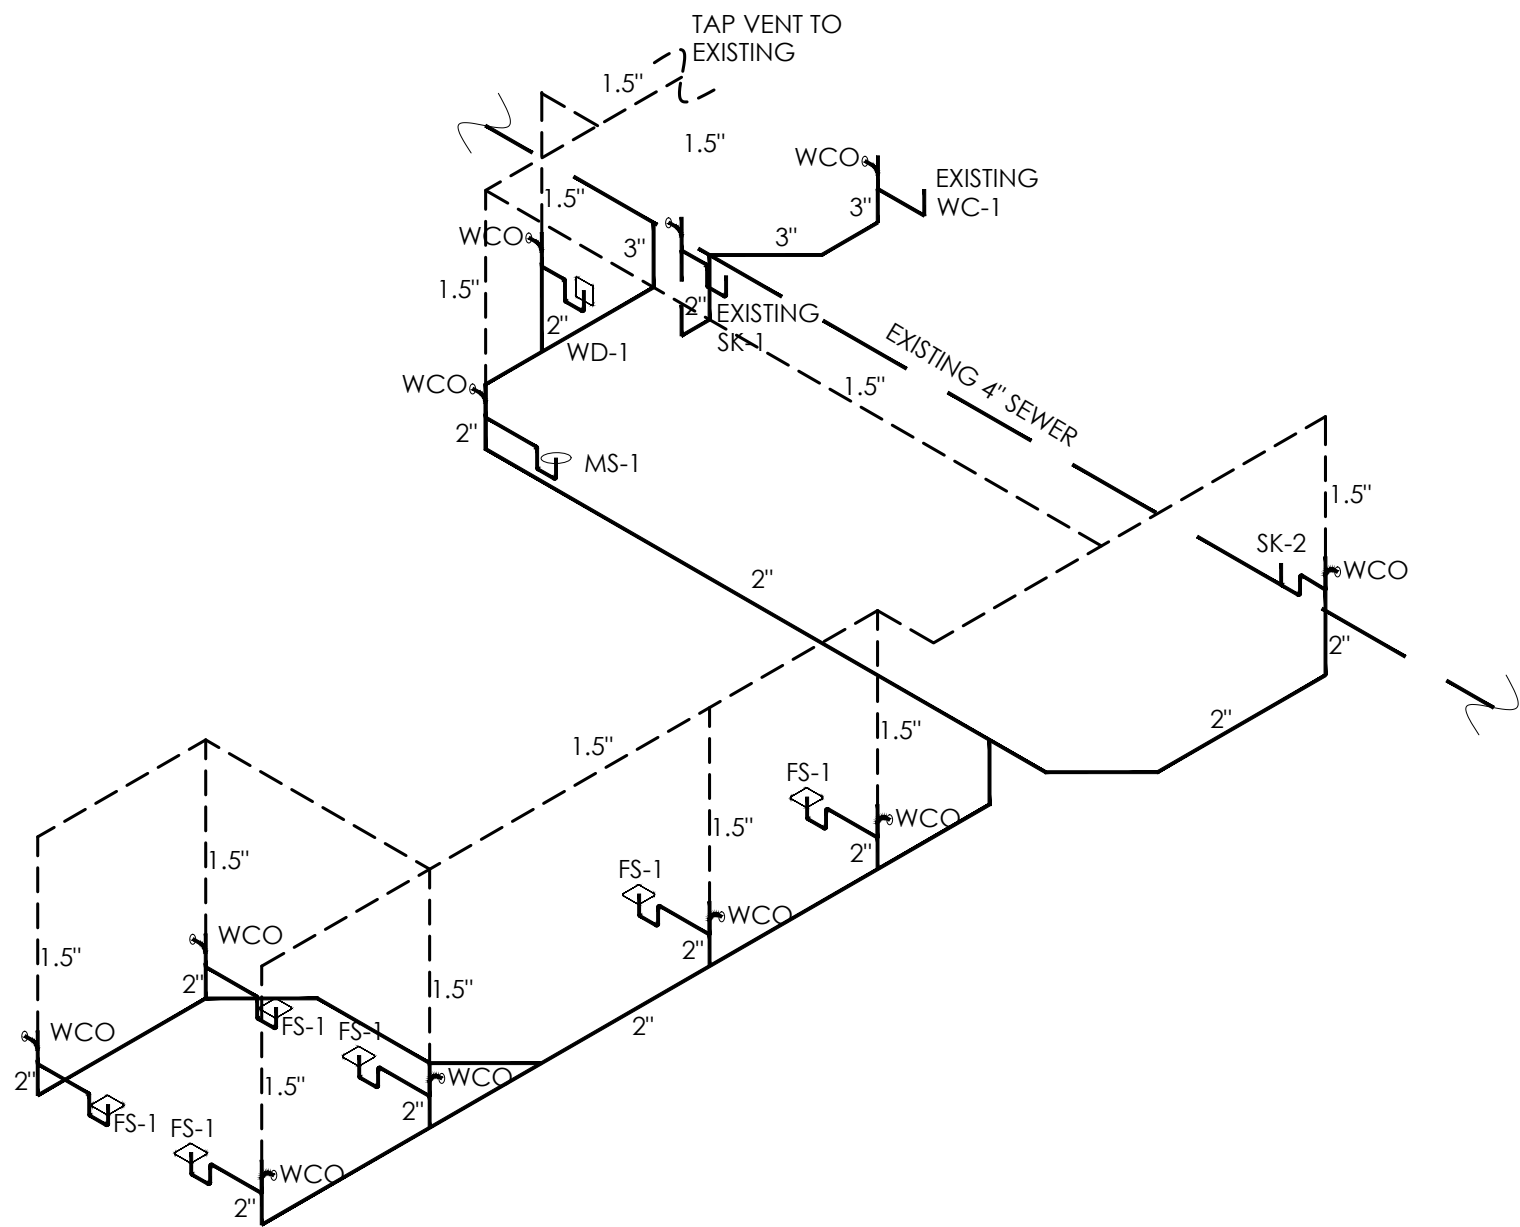

PLUMBING ISOMETRIC

NTS

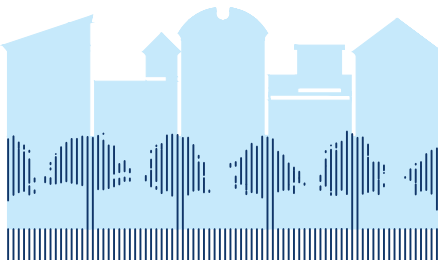

CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net

DRAFTER: GO, DJ, GD, JR

REVISIONS:

- 1. --
- 2. --
- 3. --
- 4. --
- 5. --

SPARKLE DOG
CARE

3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025


CS-1140

P-3

WASTE & VENT
SCHEMATIC

GENERAL NOTES

- A. SEE DIVISION 15 - PLUMBING OF THE SPECIFICATIONS FOR IMPORTANT INFORMATION RELATING TO BUILDING CODES, CITY ORDINANCES, MATERIALS AND METHODS.
- B. SLOPE ALL LINES AT 1/4" PER FOOT.
- C. ALL CLEANOUT SIZES SHALL MATCH THE SIZE OF THE PIPE THEY SERVICE.

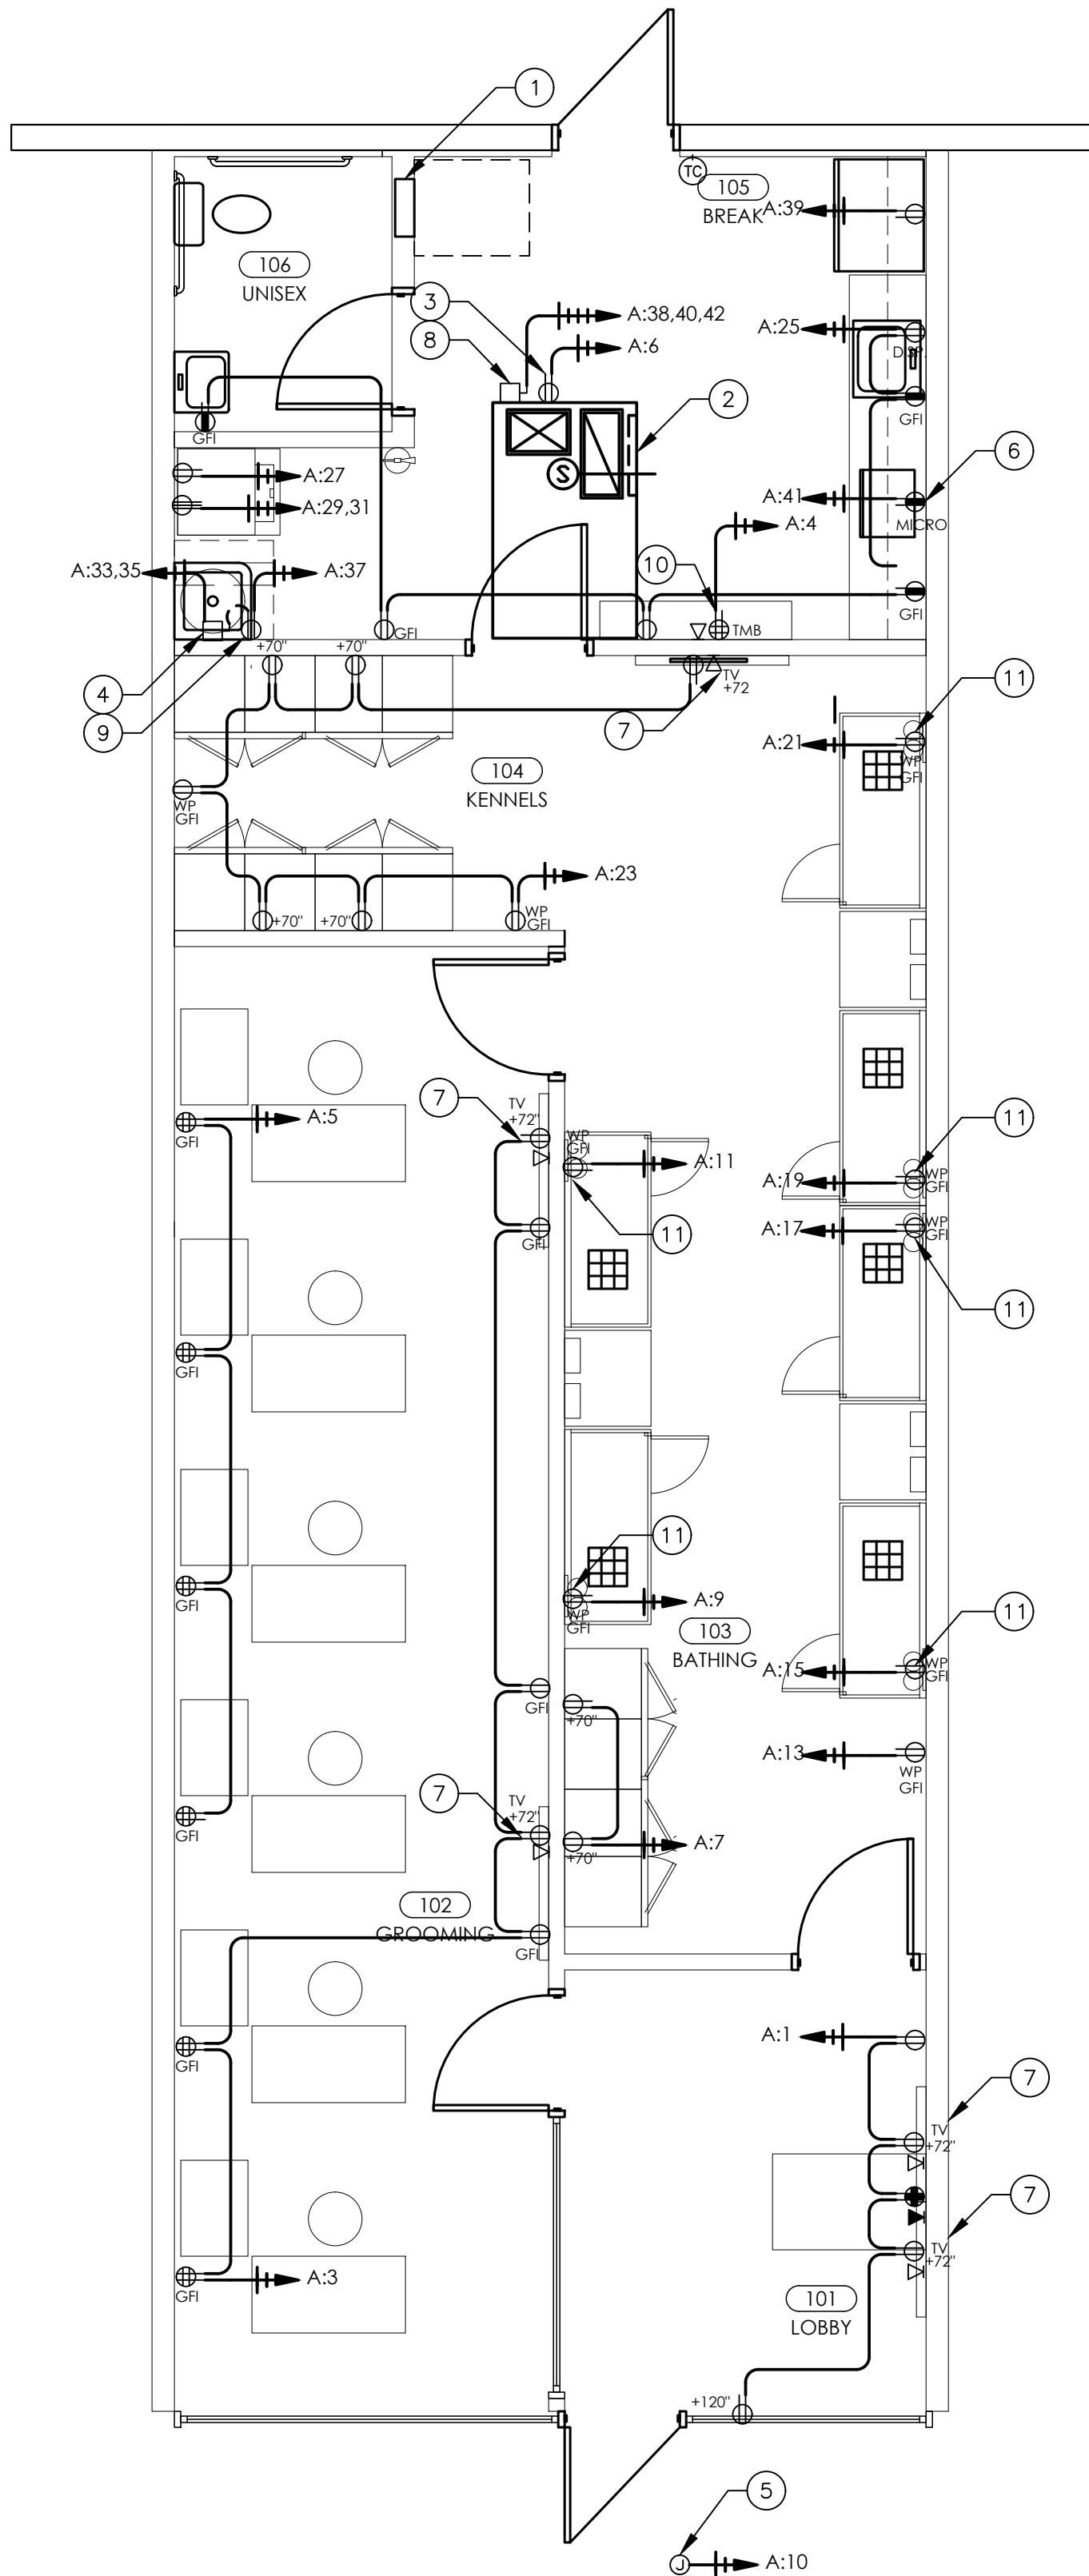

POWER PLAN KEYNOTES

1. LOCATION OF ELECTRICAL PANEL "A" RECESSED IN WALL. USE NEW PANEL AND REUSE FEEDERS.
2. EXISTING MECHANICAL EQUIPMENT ON ROOF WITH EXISTING EXTENSION AND CONNECTION TO ELECTRICAL PANEL.
3. EXISTING ROOF GFI / WATERPROOF RECEPTACLE WITHIN 25' OF EXISTING A/C UNIT.
4. PROVIDE 30/2 DISCONNECT SWITCH WITH 30/2 FRN-R FUSE AT WATER HEATER.
5. EXISTING J-BOX FOR TENANT SIGN. VERIFY LOCATION. PROVIDE POWER AS SHOWN. RUN CIRCUIT THROUGH TIMECLOCK TO PANEL. LOCATE TIMECLOCK ADJACENT TO EQUIPMENT SHUT OFF APPROXIMATELY 4' NORTH OF ELECTRICAL PANEL.
6. MICROWAVE RECEPTACLE BELOW IN CABINETRY. VERIFY LOCATION WITH TENANT AND GENERAL CONTRACTOR.
7. PROVIDE FLUSH J-BOX FOR TELEVISION (NIC) AT 72" A.F.F. THIS LOCATION. VERIFY EXACT LOCATION WITH TENANT.
8. EXISTING WEATHERPROOF DISCONNECT AT 4-TON ROOFTOP UNIT.
9. PROVIDE DUPLEX RECEPTACLE FOR WATER SOLENOID APPROXIMATELY 5' A.F.F. SOLENOID SHALL BE TIED IN WITH 18 GA WIRE TO REMOTE ON/OFF CONTROL PANEL. SEE LOCATION THIS SHEET.
10. PROVIDE 24" x 48" x 3/4" PLYWOOD WITH #6CU GROUND FOR TELEPHONE MOUNTING BOARD. EXTEND NEW PHONE CONDUIT TO THIS LOCATION. PROVIDE DEDICATED QUAD RECEPTACLE. MOUNT AS HIGH AS POSSIBLE.
11. PROVIDE DEDICATED RECEPTACLE FOR HAIR DRYER. VERIFY EXACT LOCATION WITH TENANT.

ELECTRICAL SYMBOLS LEGEND

SYMBOL	DESCRIPTION
	4-PLEX RECEPTACLE (110V) @ 15" A.F.F.
	DUPLEX RECEPTACLE (110V) @ 15" A.F.F.
	110V RECEPTACLE 6" ABOVE COUNTER UNLESS NOTED OTHERWISE
	GROUND FAULT INTERRUPT RECEPTACLE (110V)
	QUAD RECEPTACLE IN FLOOR WITH FLUSH BRASS CAP
	JUNCTION BOX
	DISCONNECT SWITCH
	DATA JACK AT 15" A.F.F. - CONDUIT WITH PULL STRING TO ABOVE CEILING
	DATA JACK AT 6" ABOVE COUNTER TOP - CONDUIT WITH PULL STRING TO ABOVE CEILING
	CONDUIT
	ELECTRICAL PANEL
	TELEPHONE MOUNTING BOARD W/ 4-PLEX RECEPTACLE
	PANEL: CIRCUIT NUMBER

WIRING SCHEDULE

GENERAL NOTES:
A. PROVIDE CODE SIZE GROUND CONDUCTOR IN ALL CONDUIT (THE GROUND CONDUCTOR IS NOT SHOWN IN WIRE COUNT).
B. AMPACITY SHOWN IS AMPACITY OF CONDUCTOR WITH CORRECTION FACTOR FOR 41-45°C, FOR CONDUCTOR RATED @ 75°C PER NEC TABLE 310.16.



CIRCUIT BKR AMPS	CONDUCTORS	AMPACITY	GROUND	CONDUIT SIZE
20	#12	20.5	#12	3/4"
30	#10	28.7	#10	3/4"
40	#8	41.0	#10	3/4"
50	#6	53.3	#10	1"
60	#4	69.7	#10	1"

GENERAL NOTES

- SEE ELECTRICAL SPECIFICATIONS THIS SHEET FOR IMPORTANT INFORMATION RELATING TO BUILDING CODES, CITY ORDINANCES, MATERIALS AND METHODS.
- CLIENT APPROVED CABINET DRAWINGS TAKE PRECEDENCE FOR ALL PLACEMENT OF PLUMBING OR ELECTRICAL. ALL PLUMBING AND/OR ELECTRICAL PLACEMENT TO BE VERIFIED WITH GENERAL CONTRACTOR PRIOR TO INSTALLATION.
- RECEPTACLES/SWITCHES/ELECTRICAL/DATA/ PHONE AND COMBINATION PLATES TO BE STANDARD SIZE. WHITE. SWITCHES TO BE DECORA ROCKER ARM.
- THERE ARE NO ANESTHESIZING AREAS IN THIS PROJECT.
- ALL CIRCUITS DESIGNATED FOR EQUIPMENT/APPLIANCE USE SHALL BE PROVIDED W/ A SINGLE (NOT DUPLEX) 20A RECEPTACLE - APPLIANCE PLUG.

ELECTRICAL SPECIFICATIONS

- WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND ALL APPLICABLE RULES, REGULATIONS AND ORDINANCES.
- PROVIDE PROPER GROUNDING FOR ALL EQUIPMENT, RACEWAYS, ETC.
- ALL DISCONNECTS, FIXTURES AND OTHER ELECTRICAL COMPONENTS SUBJECT TO THE WEATHER MUST HAVE WEATHERPROOF ENCLOSURES.
- ALL ROUGH-IN LOCATIONS SHOWN ARE APPROXIMATE. CONTRACTOR IS RESPONSIBLE FOR DETERMINING PROPER LOCATION.
- PROVIDE DISCONNECTS, FUSES, OVER CURRENT PROTECTION, CONTROL AND POWER WIRING, CHORDS AND PLUGS TO ALL EQUIPMENT INCLUDED AS PART OF THIS PROJECT, IF REQUIRED FOR PROPER OPERATION BUT NOT PROVIDED BY THE EQUIPMENT MANUFACTURER. EQUIPMENT SHALL INCLUDE ALL HVAC, EXHAUST FANS, HOODS, KITCHEN EQUIPMENT, MEDICAL EQUIPMENT AND ANY SPECIAL EQUIPMENT SHOWN AS A PART OF THE PROJECT.
- CONDUCTORS:
A. USE THW OR THWN #12 MINIMUM, 75° RATING.
B. FOR HOME RUNS OVER 65 FEET, USE ONE SIZE LARGER WIRE.
C. FOR HOME RUNS OVER 115 FEET, USE TWO SIZES LARGER WIRE.
D. ALUMINUM CONDUCTORS ARE NOT ALLOWED.
- CONDUIT:
A. USE RIGID OR EMT AS ALLOWED BY CODE.
B. ALL CONDUITS EXPOSED TO THE ELEMENTS OR BURIED UNDERGROUND SHALL BE WRAPPED WITH SCOTCH 51 TAPE OR EQUAL.
C. MC TYPE PREWIRED FLEXIBLE CABLE SHALL BE PERMITTED IN ALL WALLS AND CEILINGS AS PERMITTED BY CODE AND LOCAL BUILDING OFFICIALS.
- OVER CURRENT PROTECTION:
A. CIRCUIT BREAKERS THAT ARE TO BE USED TO PROTECT LIGHTING CIRCUITS ARE TO BE RATED FOR SWITCHING DUTY.
B. PROVIDE LOCK-ON DEVICES FOR NIGHT LIGHT, EMERGENCY AND EXIT LIGHT CIRCUITS.
C. ALL RECEPTACLES AND FIXED EQUIPMENT WITHIN AREA OF WET LOCATION NEED GROUND-FAULT CIRCUIT INTERRUPTER PROTECTION PER NEC 517.20.
D. PROVIDE HANDLE TIES FOR ALL HOME RUNS OF SINGLE POLE CIRCUITS THAT SHARE A COMMON NEUTRAL. ALL WIRES IN A HOME RUN GROUPING OF SAID CIRCUITS SHALL BE BOUND TOGETHER IN THE PANEL BOX TO INDICATE CLEARLY THAT THEY UTILIZE A COMMON GROUND.

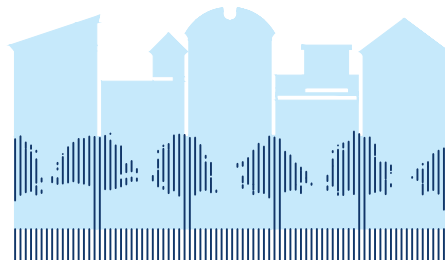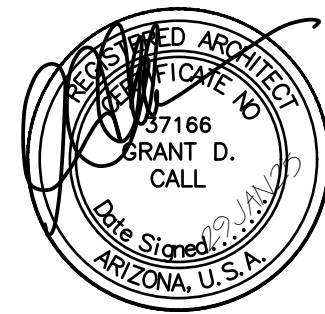

CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net

DRAFTER: GO, DJ, GD, JR

REVISIONS:

- 1
- 2
- 3
- 4
- 5

SPARKLE DOG
CARE


3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025

CS-1140

E-1

POWER PLAN

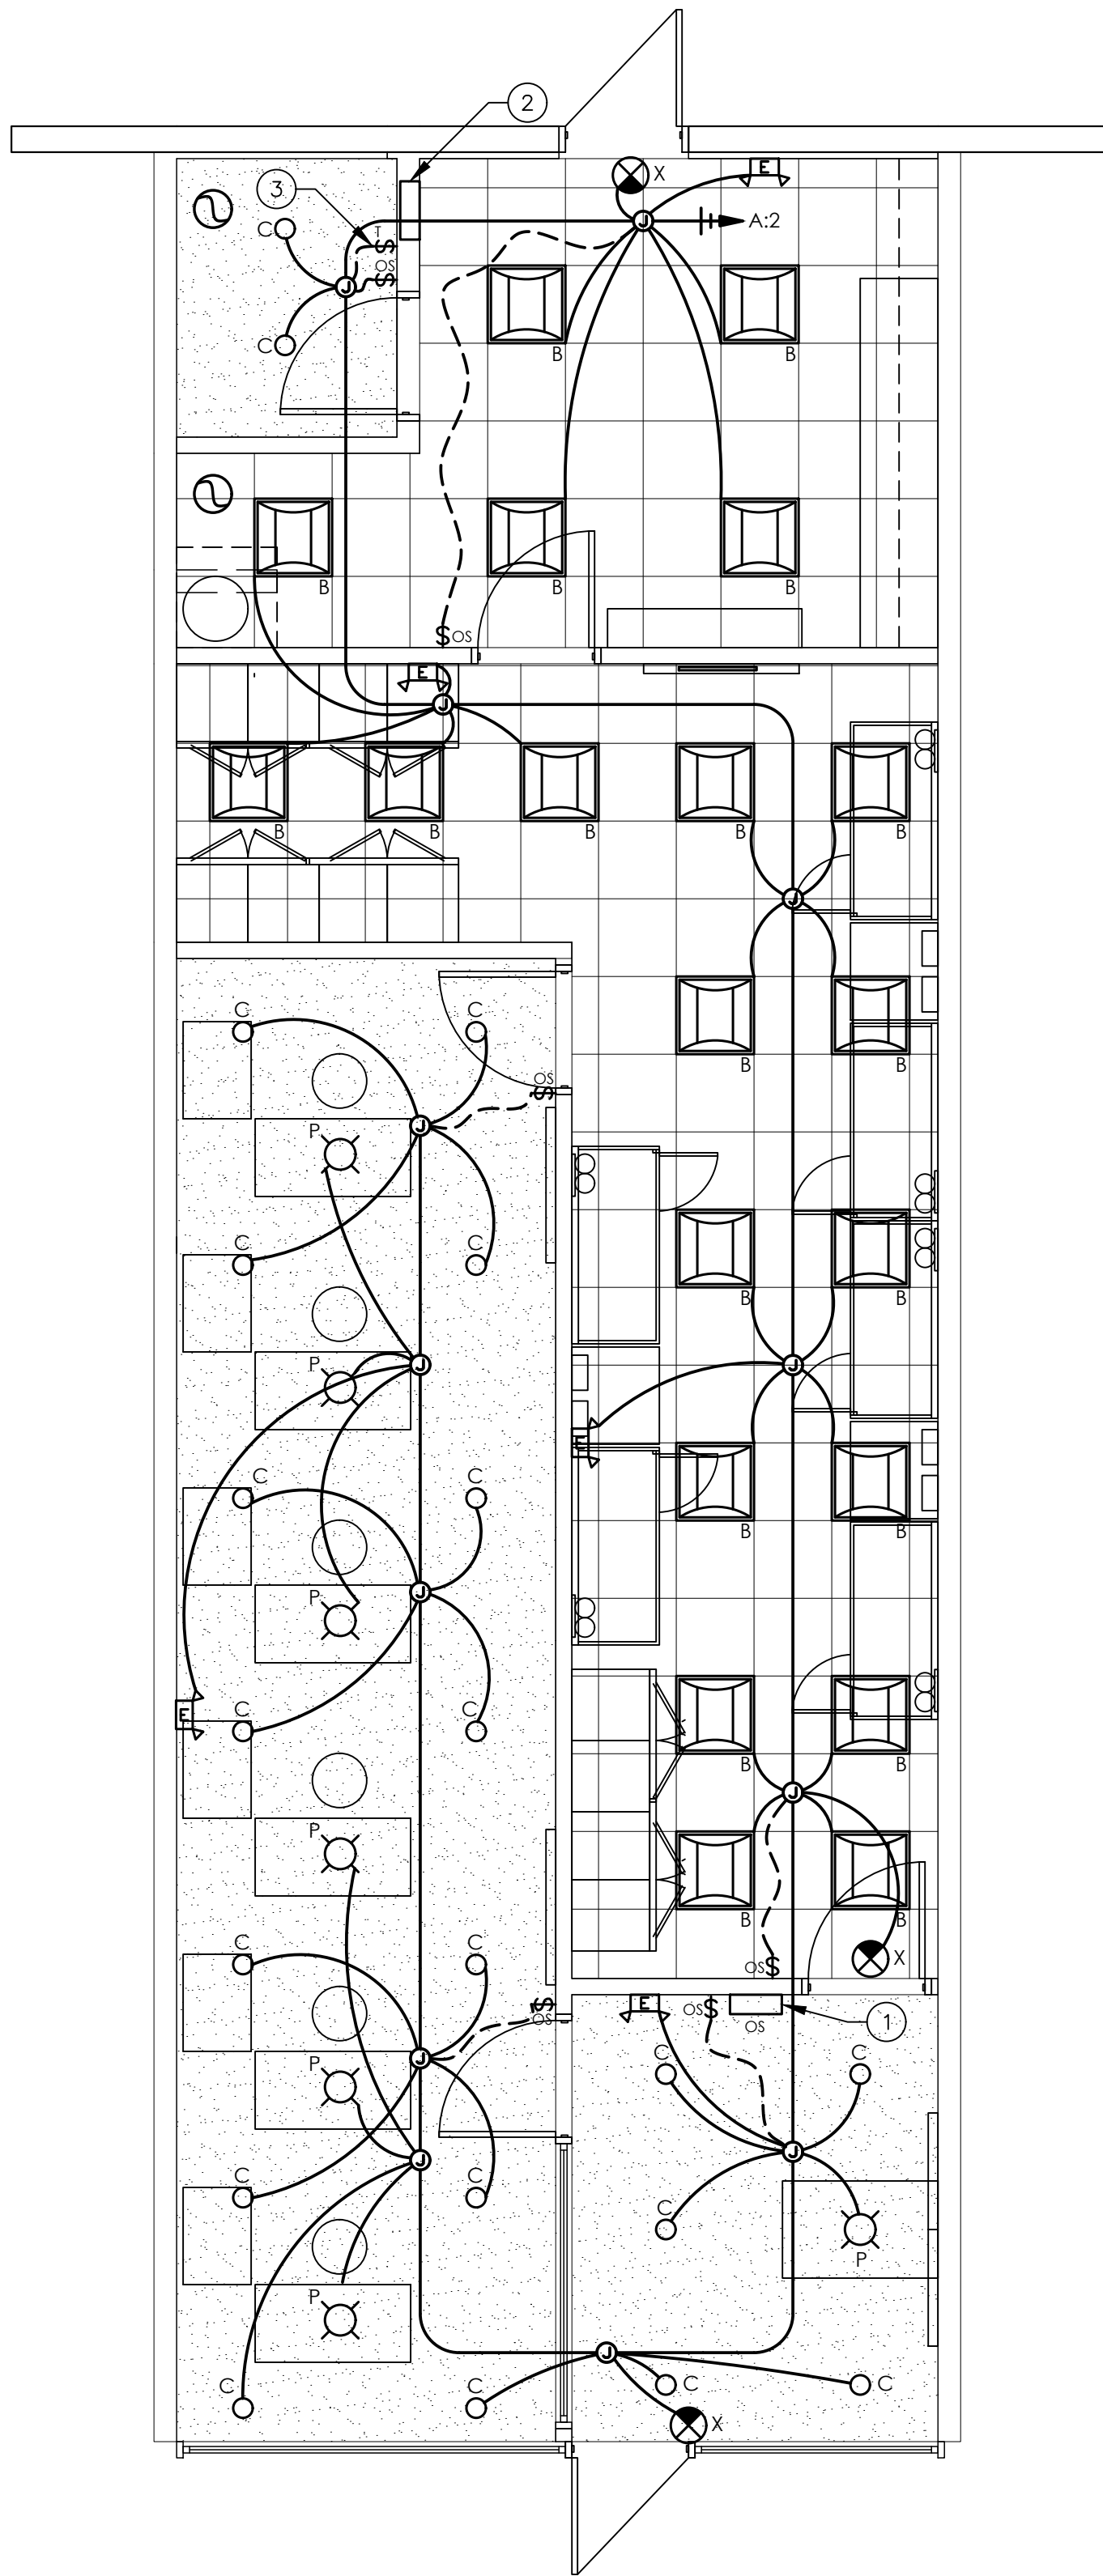







LIGHTING PLAN KEYNOTES

1. SWITCH BANK LOCATION. SEE SCHEDULE THIS SHEET.
2. NEW ELECTRICAL PANEL "A".
3. PROVIDE A (7) SEVEN DAY PROGRAMMABLE TIMER SWITCH TO CONTROL THE EXHAUST FAN AT THIS LOCATION.

ELECTRICAL SPECIFICATIONS

1. WORK SHALL BE PERFORMED IN ACCORDANCE WITH THE NATIONAL ELECTRIC CODE AND ALL APPLICABLE RULES, REGULATIONS AND ORDINANCES.
2. PROVIDE PROPER GROUNDING FOR ALL EQUIPMENT, RACEWAYS, ETC.
3. ALL DISCONNECTS, FIXTURES AND OTHER ELECTRICAL COMPONENTS SUBJECT TO THE WEATHER MUST HAVE WEATHERPROOF ENCLOSURES.
4. ALL ROUGH-IN LOCATIONS SHOWN ARE APPROXIMATE. CONTRACTOR IS RESPONSIBLE FOR DETERMINING PROPER LOCATION.
5. PROVIDE DISCONNECTS, FUSES, OVER CURRENT PROTECTION, CONTROL AND POWER WIRING, CHORDS AND PLUGS TO ALL EQUIPMENT INCLUDED AS PART OF THIS PROJECT, IF REQUIRED FOR PROPER OPERATION BUT NOT PROVIDED BY THE EQUIPMENT MANUFACTURER. EQUIPMENT SHALL INCLUDE ALL HVAC, EXHAUST FANS, HOODS, KITCHEN EQUIPMENT, MEDICAL EQUIPMENT AND ANY SPECIAL EQUIPMENT SHOWN AS A PART OF THE PROJECT.
6. CONDUCTORS:
 - A. USE THW OR THWN #12 MINIMUM, 75° RATING.
 - B. FOR HOME RUNS OVER 120 FEET, USE ONE SIZE LARGER WIRE.
 - C. FOR HOME RUNS OVER 250 FEET, USE TWO SIZES LARGER WIRE.
 - D. ALUMINUM CONDUCTORS ARE NOT ALLOWED.
7. CONDUIT:
 - A. USE RIGID OR EMT AS ALLOWED BY CODE.
 - B. ALL CONDUITS EXPOSED TO THE ELEMENTS OR BURIED UNDERGROUND SHALL BE WRAPPED WITH SCOTCH 51 TAPE OR EQUAL.
 - C. MC TYPE PREWIRED FLEXIBLE CABLE SHALL BE PERMITTED IN ALL WALLS AND CEILINGS AS PERMITTED BY CODE AND LOCAL BUILDING OFFICIALS.
8. OVER CURRENT PROTECTION:
 - A. CIRCUIT BREAKERS THAT ARE TO BE USED TO PROTECT LIGHTING CIRCUITS ARE TO BE RATED FOR SWITCHING DUTY.
 - B. PROVIDE LOCK-ON DEVICES FOR NIGHT LIGHT, EMERGENCY AND EXIT LIGHT CIRCUITS.
 - C. ALL RECEPTACLES AND FIXED EQUIPMENT WITHIN AREA OF WET LOCATION NEED GROUND-FAULT CIRCUIT INTERRUPTER PROTECTION PER NEC 517.20.
 - D. PROVIDE HANDLE TIES FOR ALL HOME RUNS OF SINGLE POLE CIRCUITS THAT SHARE A COMMON NEUTRAL. ALL WIRES IN A HOME RUN GROUPING OF SAID CIRCUITS SHALL BE BOUND TOGETHER IN THE PANEL BOX TO INDICATE CLEARLY THAT THEY UTILIZE A COMMON GROUND.
9. IN INDOOR LOCATIONS OTHER THAN DWELLINGS AND ASSOCIATED ACCESSORY STRUCTURES, FLUORESCENT LUMINARIES THAT UTILIZE DOUBLE-ENDED LAMPS AND CONTAIN BALLAST(S) THAT CAN BE SERVICED IN PLACE SHALL HAVE A DISCONNECTING MEANS EITHER INTERNAL OR EXTERNAL TO EACH LUMINARY. FOR EXISTING INSTALLED LUMINARIES WITHOUT MEANS, AT THE TIME A BALLAST IS REPLACED, A DISCONNECTING MEANS SHALL BE GUARDED. NEC 410.130(G)(1)

ELECTRICAL SYMBOLS LEGEND

SYMBOL	DESCRIPTION
	2x4 LIGHT FIXTURE
	EXIT LIGHT
	CEILING MOUNTED LIGHT
	RECESSED CAN LIGHT
	EMERGENCY LIGHT FIXTURE
	EXHAUST FAN
	SWITCH BETWEEN 36" TO 54" A.F.F.
	OCCUPANCY SENSOR SWITCH BETWEEN 36" TO 54" A.F.F.
	TIMER SWITCH BETWEEN 36" TO 54" A.F.F.
	ELECTRICAL PANEL
	PANEL: CIRCUIT NUMBER

WIRING SCHEDULE

- GENERAL NOTES:
- A. PROVIDE CODE SIZE GROUND CONDUCTOR IN ALL CONDUIT (THE GROUND CONDUCTOR IS NOT SHOWN IN WIRE COUNT).
 - B. AMPACITY SHOWN IS AMPACITY OF CONDUCTOR WITH CORRECTION FACTOR FOR 41-45°C. FOR CONDUCTOR RATED @ 75°C PER NEC TABLE 310.16.

CIRCUIT BKR AMPS	CONDUCTORS	AMPACITY	GROUND	CONDUIT SIZE
20	#12	20.5	#12	3/4"
30	#10	28.7	#10	3/4"
40	#8	41.0	#10	3/4"
50	#6	53.3	#10	1"
60	#4	69.7	#10	1"


SWITCH BANK SCHEDULE

- A. LOBBY

- NOTES:
1. ALL SWITCHES ARE SINGLE POLE, WHITE, OCCUPANCY SENSORED
 2. SEE E-1 FOR EQUIPMENT SWITCH ROUTING
 3. ALL LIGHTING CONTROLS PER IECC C405.2.

GENERAL NOTES

- A. SEE ELECTRICAL SPECIFICATIONS THIS SHEET FOR IMPORTANT INFORMATION RELATING TO BUILDING CODES, CITY ORDINANCES, MATERIALS AND METHODS.
- B. VERIFY LIGHTING, AIR SUPPLY AND AIR RETURN LOCATION WITH CONTRACTOR PRIOR TO INSTALLATION.
- C. OUTLETS/SWITCHES/ELECTRICAL PLATES TO BE STANDARD SIZE, WHITE. SWITCHES TO BE DECORA ROCKER ARM. DIMMING SWITCHES TO BE DECORA ROCKER ARM WITH SIDE SLIDE DIMMER.

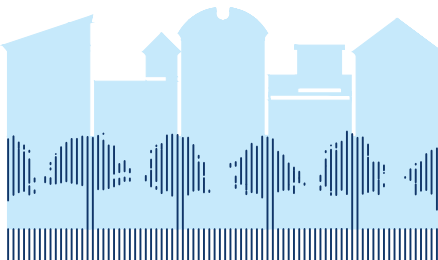

CITY SPACES
architecture

8419 E BASELINE RD.
SUITE 103
MESA, AZ 85212
PH: 602-653-9924 www.cityspaces.net

CONTACT: GRADY OLSEN
golsen@cityspaces.net

DRAFTER: GO, DJ, GD, JR

REVISIONS:

- | | |
|---|----|
| 1 | -- |
| 2 | -- |
| 3 | -- |
| 4 | -- |
| 5 | -- |

SPARKLE DOG
CARE

3748 E INDIAN SCHOOL RD
PHOENIX, AZ

29-JAN-2025

CS-1140

E-2

LIGHTING PLAN

